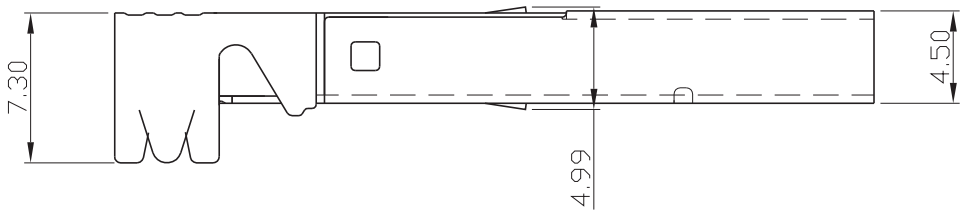

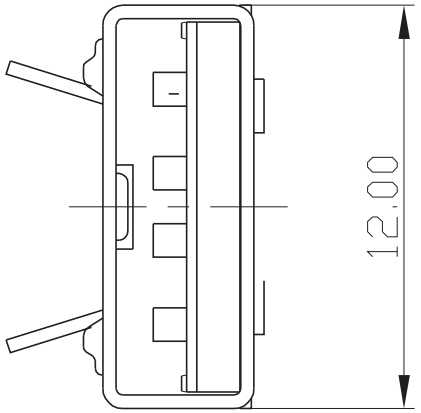

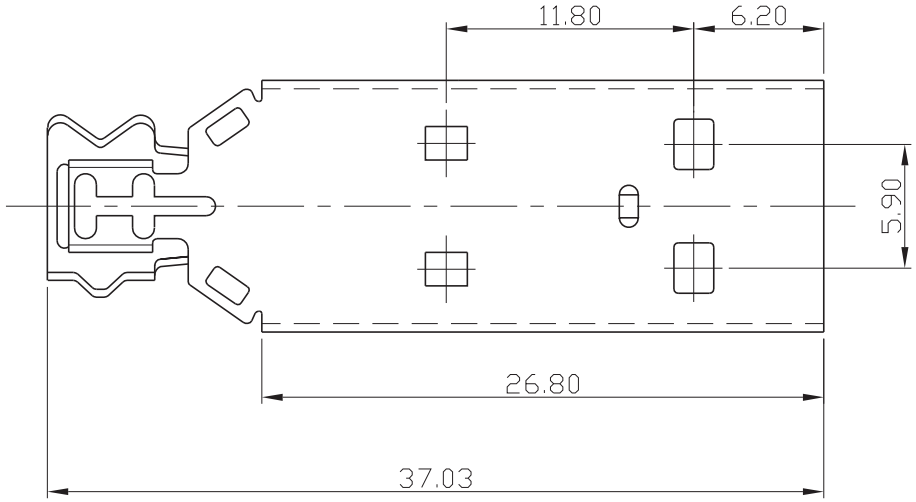

Material:
- Thermoplastic (PBT)
- Contact: Brass
- Shell: SPCC
- Contact: 30μ Gold Contact Plating
- Shell: Nickel Plating

Electrical:
- Voltage Rating: 30V
- Current Rating: 1A
- Contact Resistance Terminal: 30MΩ Max
- Dielectric Withstanding Voltage: 750V AC
- Insulation Resistance: 1000MΩ Min

Unit: MM±0.15MM

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	10.19.11	Chappell
Approved		

Item No. **A-USBPA-2-R**

Title USB, Type A, Assembly-Type, Version 2.0

Drawing No. **rev00**

Replace | Sheet

RoHS Complaint

ASSMANN WSW components