
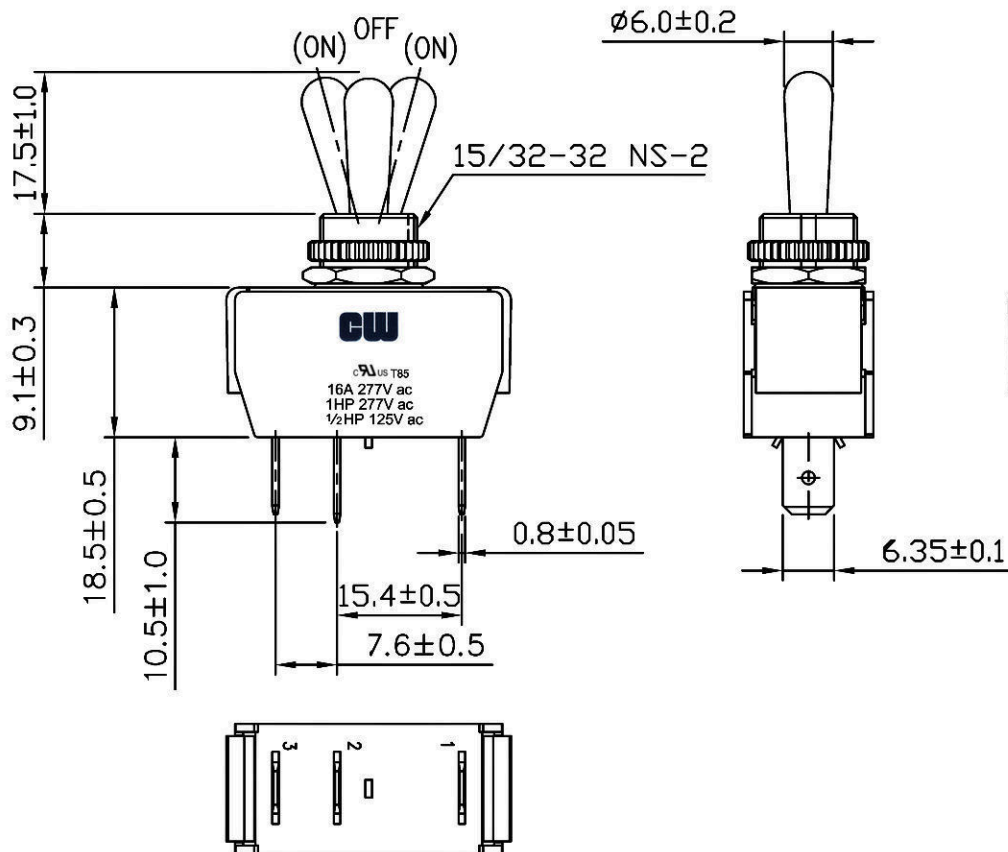


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	16A 277VAC 1HP 277VAC cRU US 1/2HP 125VAC	Mounting Hole	Circuit
Contact Resistance	50m ohm Max		
Insulation Resistance	DC 500V 100M ohm Min		
Dielectric Strength	DC 500V 100M ohm Min.		
Operation Temperature	0°C~85°C		
Switch Function	3P SPDT (ON)-OFF-(ON)		

() = Momentary Function

Waterproof: IP56

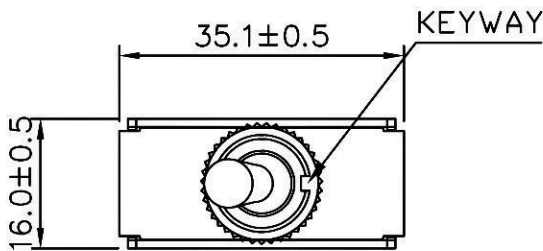

RoHS Compliant

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 11/18/08

Rev. 0

Unit: mm

Checked By: **GG**

Title: **TOGGLE SWITCH**

CW P/N: **GTS447G101HR**