


Legacy NZG25-100K 100 Hz to 100 kHz

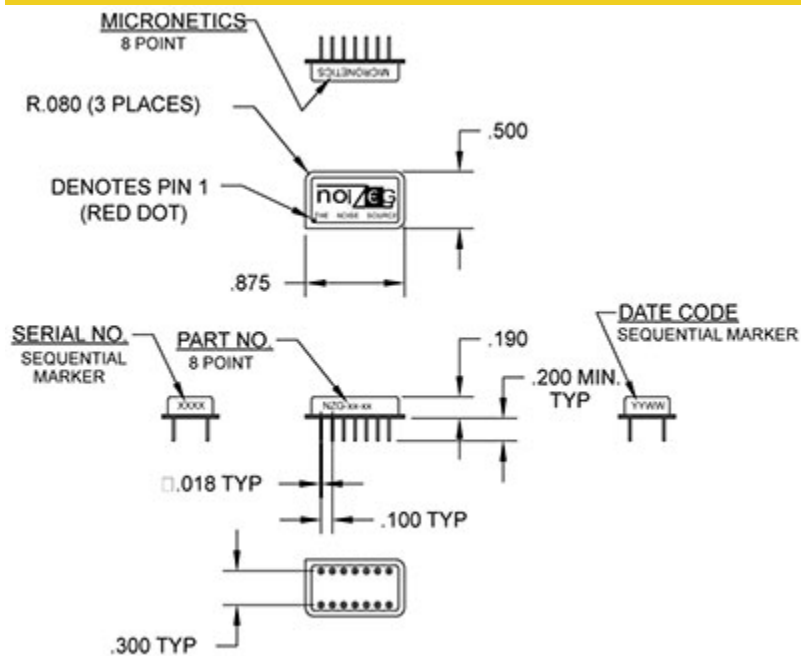

Specifications

RF Frequency	100 Hz to 100 kHz
Noise Output	94.2 dB Min ENR
Noise Spectral Density (N_o)	-79.8 dBm/Hz Min
Noise Power (N)	25 mV min in Band
Peak Factor	5:1
Bias Voltage	15 V
Impedance	600 ohms

Package and Connectivity

Construction	DIP 14 Pin
--------------	------------

Environmental

Operating Temperature	0 to 70 °C
Storage Temperature	-60 to 150 °C

Notes

Specifications subject to change without notice

Micronetics, Inc. | Hudson, NH | Tel: 1-603-883-2900 | www.Micronetics.com


MICRONETICS

MICRONETICS
8 POINT




R.080 (3 PLACES)

DENOTES PIN 1
(RED DOT)

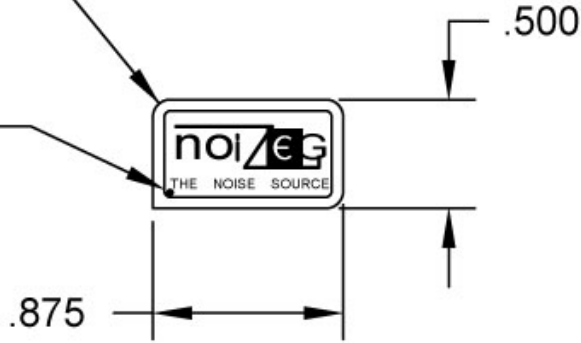

SERIAL NO.
SEQUENTIAL
MARKER

PART NO.
8 POINT



DATE CODE
SEQUENTIAL MARKER



.190

.200 MIN.
TYP

□.018 TYP

.100 TYP

.300 TYP

