


.100" (2.54 mm) Pitch Board to Board Sockets & Adapters




NB/LNB - Single Row Molded Female



DRS - Dual Row Molded Female

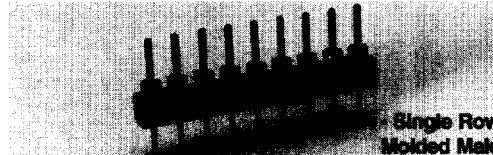


Single Row Molded Male




DRA - Dual Row Molded Male




Peel-A-Way[®] Low Profile Board to Board



KSS - Single Row Peel-A-Way[®] Female

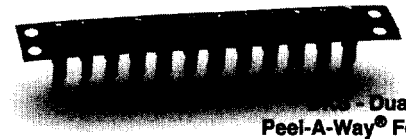

DKS - Dual Row Peel-A-Way[®] Female

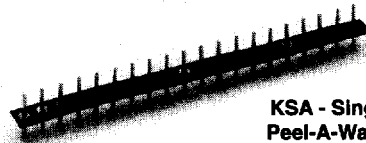

KSA - Single Row Peel-A-Way[®] Male



DKA - Dual Row Peel-A-Way[®] Male

Features:

- High reliability method of interconnecting.
- Reliable mechanical support.
- Complete flexibility. If the board to board spacing you need is not shown, consult factory.
- Also Available in .050" & 2mm Pitch.

Terminals and Contacts:

Terminal: Brass - Copper Alloy 360, ASTM-B-16

Contact: Beryllium Copper - Copper Alloy 172, ASTM-B-194

Plating:

Terminal: Gold over Nickel or Tin-Lead over Nickel

Contact: Gold over Nickel or Tin-Lead over Nickel


Body Material:

Molded - Glass filled thermoplastic Polyester (P.B.T.) U.L. Rated 94V-O, -60°C to 140°C (-76°F to 284°F)


High Temp Molded - High temp. glass filled thermoplastic, U.L. Rated 94V-O, -60°C to 260°C (-76°F to 500°F)


Peel-A-Way[®] - Polyimide Film - Temp. range -269°C to 400°C (-452°F to 752°F)

How To Order Single and Dual Row Female

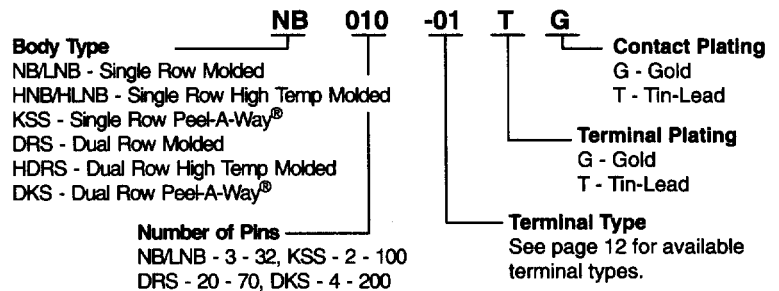









How To Order Single and Dual Row Male

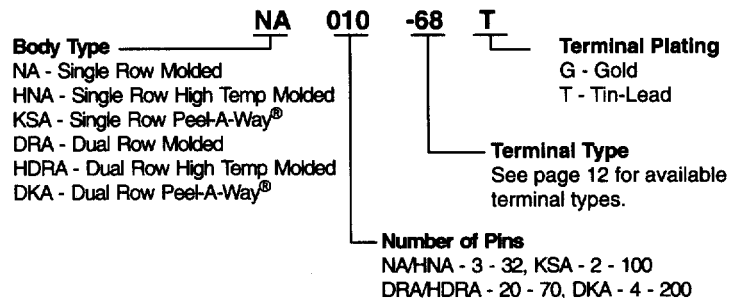










.100" (2.54 mm) Pitch Board to Board Interconnections

Male Terminal Information



Female Terminal Information




* These terminal types are available in either molded or Peel-A-Way®.


Socket Options



RTV Sealed - Pg. 27



Tape Sealed - Pg. 27



Solder Preform - Pg. 26

See designated pages for how to order information on these socket options.