


T-1 (3mm) bi and tri-color leds

● FEATURES

- Two package styles with choice of (3) or (2) leads.
- Choice of colors and color combinations.
- Third color possible by A.C. power-up or simultaneously Powering both chips.



● APPLICATIONS

- Panel Status indicator two to three colors in one position.
- Status indicator of data lines and power lines.
- Go, no-go indicator.

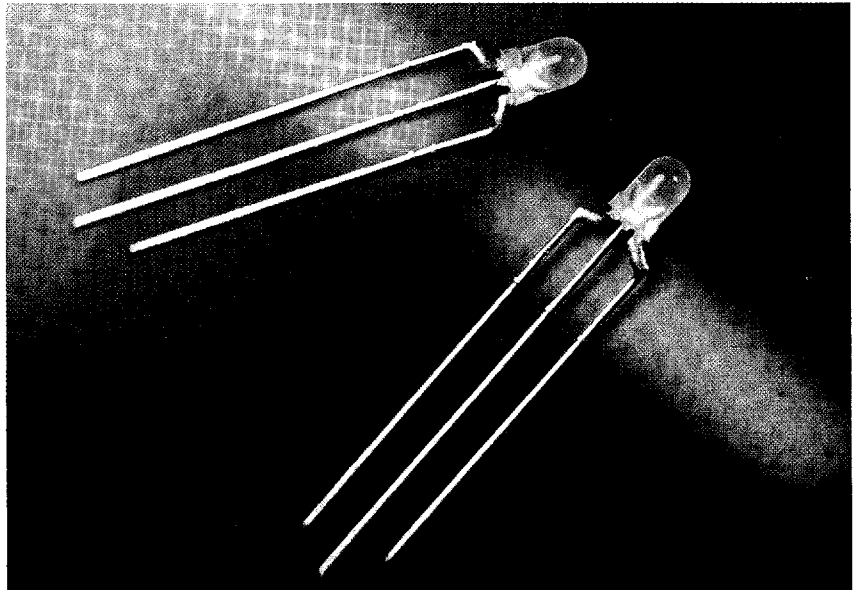

● PRODUCT SELECTION

Lumex Part Nmbr	Colors/	λ_p	Iv/ @20mA	Lens Finish	Fig.
Three Ledged Version					
SSL-LX3049IGW	Red/Grn	635/565	40/30	White	1
SSL-LX3049GYW	Yel/Grn	585/565	30/30	Difsd	1
SSL-LX3049IYW	Red/Yel	635/585	40/30	Difsd	1
Two Ledged Version					
SSL-LX3054IGW	Red/Grn	635/565	40/30	White	2
SSL-LX3054YGW	Yel/Grn	585/565	30/30	Difsd	2

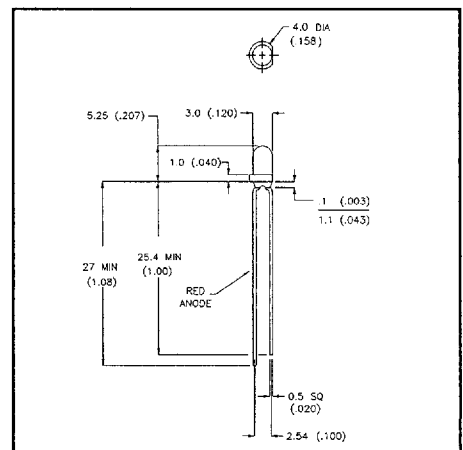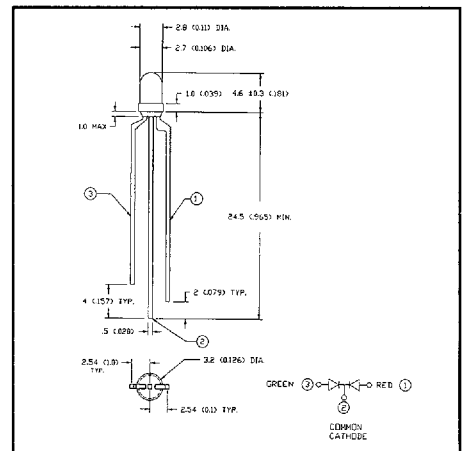

50040

for design assistance fax 1-800-944-2790 2