

KR Electronics 2590-3

General Description


KR 2590-3 is a 64.9 MHz bandpass filter. The filter has a minimum 1.5 dB bandwidth of 14.2 MHz and is designed for 50 Ω source and load impedance. Other and bandwidths are available. Also available in a surface mount package. Please consult the factory.

Features


- 64.9 MHz Elliptic Bandpass
- 50 Ω
- SMA Connectors

Typical Performance

Passband Amplitude & Group Delay
(1 dB/div & 100 nsec/div)

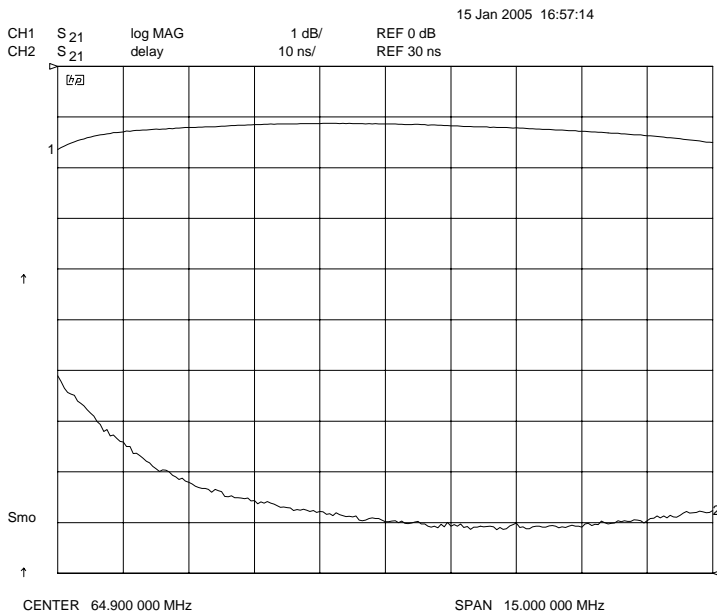

Overall Response
(10 dB/div)

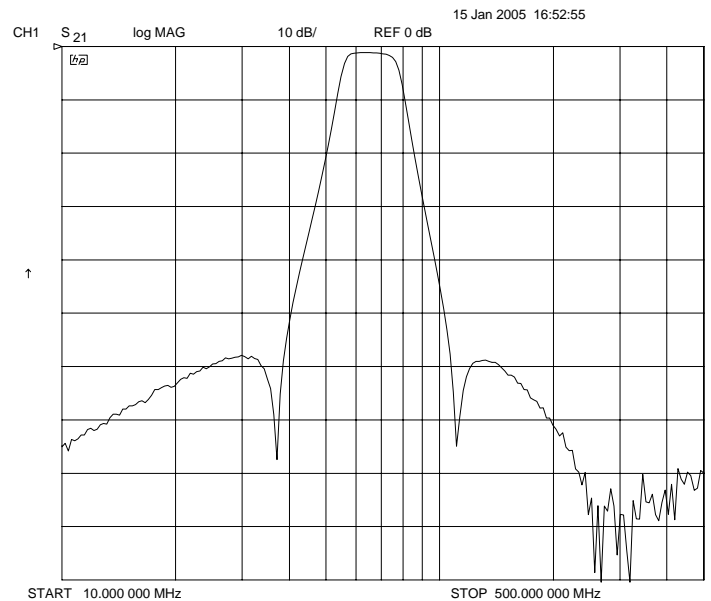

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 2590-3

Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	64.9 MHz
Insertion Loss	< 2.5 dB (1.2 dB typical)
Minimum 1.5 dB Bandwidth	14.2 MHz
Attenuation at 36 MHz & below	> 50 dB
Attenuation at 111.1 MHz & above	> 50 dB
Source & Load	50 Ω

Physical Dimensions

