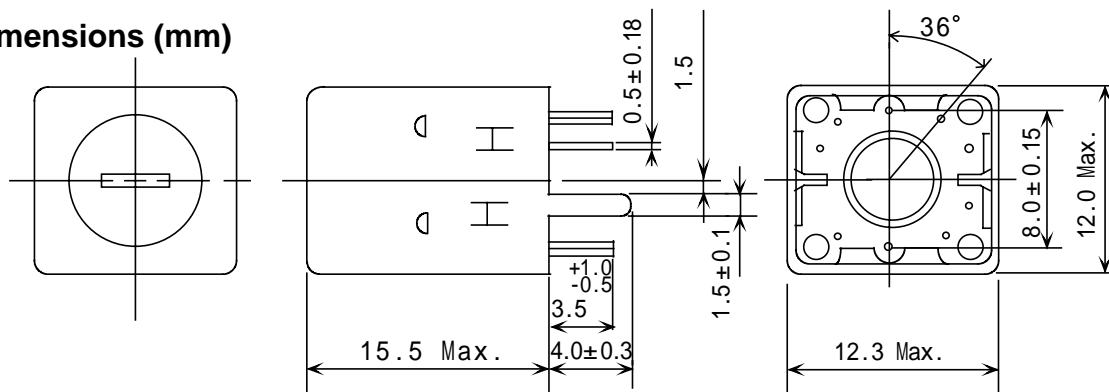


Type: SM-118
Product Description


- 12.3 × 12.0mm Max.(L × W), 15.5mm Max. Height.
- Operating frequency: 30MHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements.

Feature

- High inductance fixed shielded type.
- Can be used as DC-DC converter transformer.
- RoHS Compliance.

Dimensions (mm)


- * Dimension does not include solder used on coil.
- * Pin pitch should be measured at the root of terminal.
- * Dimensions without tolerance are approx.

Connection (Bottom View)


“ S ” is winding start.

Specification (Part No.S7010900)

Item	(1-2)	Measuring condition
Inductance	530 μ H \pm 6% Variable	1kHz
Unloaded Qu	90 Min.	100kHz