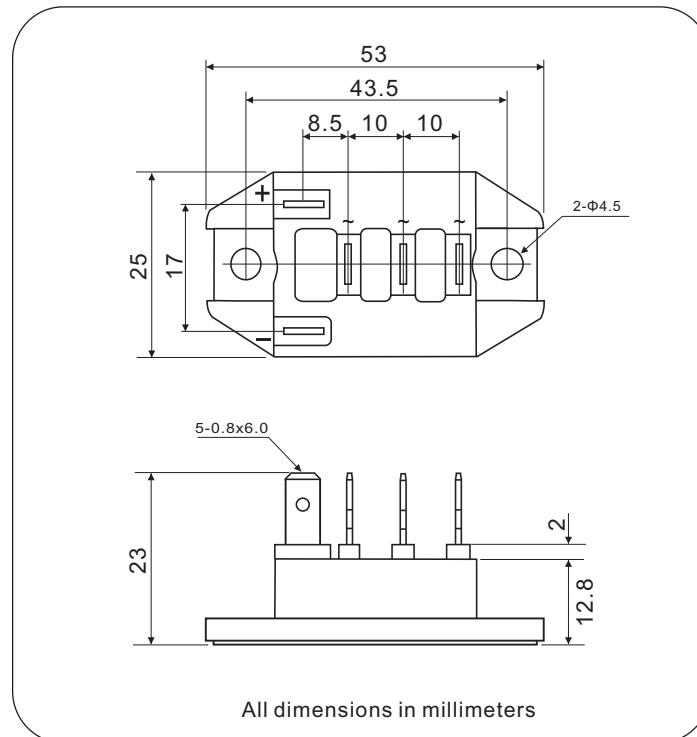



Glass Passivated Three-Phase Bridge Rectifier, 30A

MTP3008 Thru MTP3012



FEATURES

- UL recognition file number E320098
- Typical IR less than 2.0 μA
- High surge current capability
- Low thermal resistance
- Compliant to RoHS
- Isolation voltage up to 2500V



TYPICAL APPLICATIONS

General purpose use in AC/DC bridge full wave rectification for big power supply, field supply for DC motor, industrial automation applications.

ADVANTAGE

- International standard package
- Epoxy meets UL 94 V-O flammability rating
- Small volume, light weight
- Small thermal resistance
- **Weight:** 120g (4.2 ozs)

PRIMARY CHARACTERISTICS

$I_{F(AV)}$	30A
V_{RRM}	800V to 1200V
I_{FSM}	500A
I_R	20 μA
V_F	1.1V
$T_{J \max.}$	150°C

Nell High Power Products

MAJOR RATINGS AND CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)					
PARAMETER	SYMBOL	MTP30			UNIT
		08	10	12	
Maximum repetitive peak reverse voltage	V_{RRM}	800	1000	1200	V
Peak reverse non-repetitive voltage	V_{RSM}	900	1100	1300	V
Maximum DC blocking voltage	V_{DC}	800	1000	1200	V
Maximum average forward rectified output current	$I_{F(AV)}$	30			A
Peak forward surge current single sine-wave superimposed on rated load	I_{FSM}	500			A
Rating (non-repetitive, for t greater than 1 ms and less than 8.3 ms) for fusing	I^2t	1200			A^2s
RMS isolation voltage from case to leads	V_{ISO}	2500			V
Operating junction storage temperature range	T_J	-40 to 150			$^\circ\text{C}$
Storage temperature range	T_{STG}	-40 to 125			$^\circ\text{C}$


ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)						
PARAMETER	TEST CONDITIONS	SYMBOL	MTP30			UNIT
			08	10	12	
Maximum instantaneous forward drop per diode	$I_F = 30\text{A}$	V_F	1.1			V
Maximum reverse DC current at rated DC blocking voltage per diod	$T_A = 25^\circ\text{C}$	I_R	20			μA
	$T_A = 150^\circ\text{C}$		2000			

THERMAL AND MECHANICAC ($T_A = 25^\circ\text{C}$ unless otherwise noted)						
PARAMETER	TEST CONDITIONS	SYMBOL	MTP30			UNIT
			08	10	12	
Typical thermal resistance junction to case	Single-side heat dissipation, sine half wave	$R_{\theta JC}^{(1)}$	0.44			$^\circ\text{C/W}$
Mounting torque to heatsink M6 $\pm 10\%$	A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound.		4			Nm
Approximate weight			120			g






Notes

(1) With heatsink, single side heat dissipation, half sine wave.

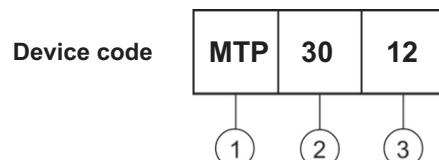(2) M6 screw.



- 1 - Module type: "MTP" for 3Ø Bridge
- 2 - $I_{F(AV)}$ rating: "30" for 30A
- 3 - Voltage code: code x 100 = V_{RRM}

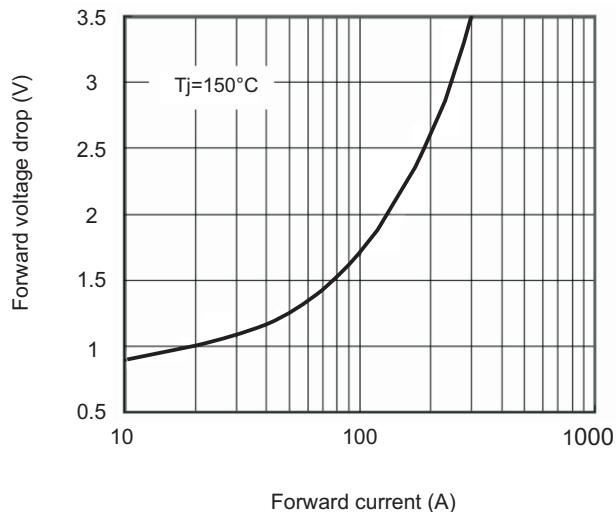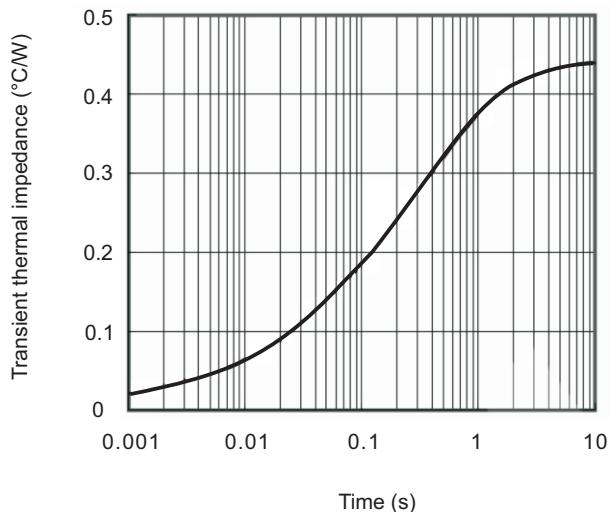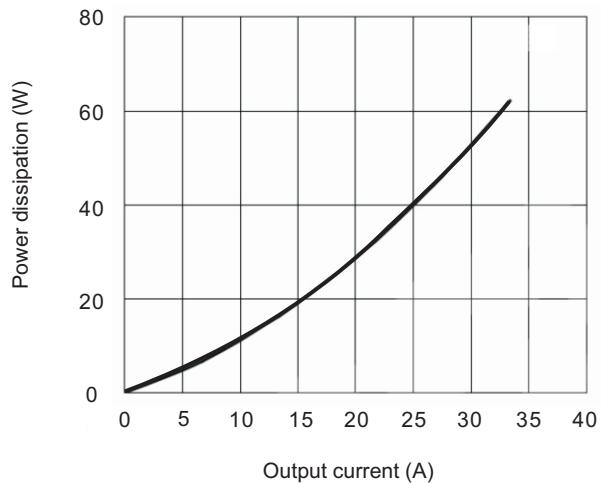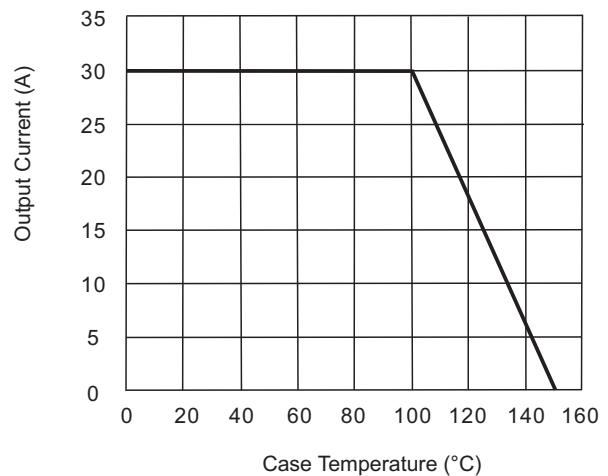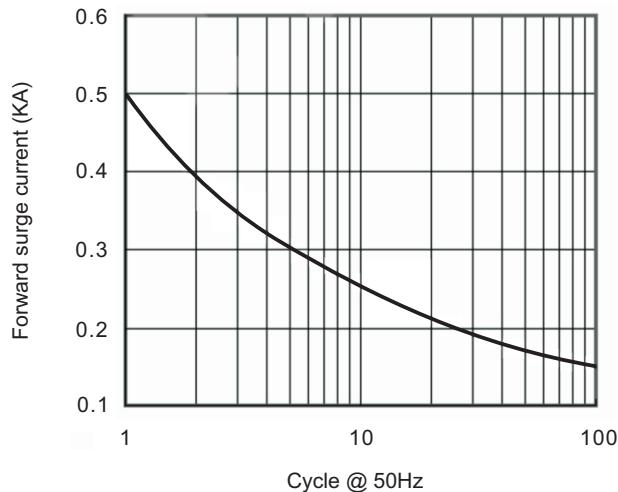Fig.1 Forward characteristic

Fig.2 Thermal Impedance (junction to case)

Fig.3 Power dissipation vs. output current

Fig.4 Case temperature vs output current

Fig.5 Forward surge current vs. cycle

Fig.6 I^2t characteristic
