

# EXTENDED REACH MULTI-RATE OC-48/STM-16 LR-2/ L-16.2 SFP TRANSCEIVERS WITH DIGITAL DIAGNOSTICS

## TRPA48E2IxFM

### Product Description

The TRPA48E2IxFM SFP series of multi-rate fiber optic transceivers with digital diagnostics monitoring functionality provide a quick and reliable interface for extended reach LR-2 applications. Diagnostics monitoring functionality (alarm and warning features) is integrated into the design via an I<sup>2</sup>C serial interface per the Multi-Source Agreement (MSA) SFF-8472, Rev. 9.4.

Products under this series are compatible with SONET/SDH standards for OC-48/STM-16 (2.488Gb/s) LR-2/L-16.2 extended reach applications, OC-3/STM-1 (156Mb/s) and OC-12/STM-4 (622Mb/s) SR/I-1 and I-4 short reach applications; Gigabit Ethernet LX (1.25Gb/s) applications per IEEE 802.3; and Fibre Channel 200-SM-LC-L (2.125Gb/s) and 100-SM-LC-L (1.062Gb/s) applications per FC-PH standards. The transceivers support data rates ranging from 2.67Gb/s down to 125Mb/s. All modules satisfy Class I Laser Safety requirements in accordance with the U.S. FDA/CDRH and international IEC-60825 standards.

The TRPA48E2IxFM multi-rate transceivers connect to standard 20-pad SFP connectors for hot plug capability. This allows the system designer to make configuration changes or maintenance by simply plugging in different types of transceivers without removing the power supply from the host system.

The transceivers have colored bail-type latches, which offer an easy and convenient way to release the modules. The latch is compliant with the SFP MSA.

The transmitter and receiver DATA interfaces are AC-coupled internally. LV-TTL Transmitter Disable control input and Loss of Signal output interfaces are also provided.

The transceivers operate from a single +3.3V power supply over an operating case temperature range of -5°C to +70°C ("B" option) or -5°C to +85°C ("E" option). The housing is made of metal for EMI immunity.



### Features

- ☑ Distance up to 100km with Single Mode Fiber
- ☑ Operating Bit Rate of 125Mb/s to 2.67Gb/s
- ☑ Compatible with SFP MSA
- ☑ Compatible with SONET/SDH OC-48/STM-16 (2.488Gb/s) LR-2/L-16.2 Applications
- ☑ Compatible with Gigabit Ethernet LX
- ☑ Compatible with Fibre Channel 200-SM-LC-L and 100-SM-LC-L
- ☑ Digital Diagnostics through Serial Interface
- ☑ Internal Calibration for Digital Diagnostics
- ☑ APD Receiver
- ☑ Optical Link Power Budget of 30dB Minimum
- ☑ Eye Safe (Class I Laser Safety)
- ☑ Hot-pluggable
- ☑ TX Fault & Loss of Signal Outputs
- ☑ TX Disable Input

### Absolute Maximum Ratings

Parameter	Symbol	Minimum	Maximum	Units
Storage Temperature	$T_{st}$	- 40	+ 85	°C
Operating Case Temperature <sup>1</sup>	"B" option	- 5	+ 70	°C
	"E" option	- 5	+ 85	
Supply Voltage	$V_{cc}$	0	+ 5.0	V
Maximum Input Optical Power (30 seconds max.)	$P_{in,max}$	-	+ 3.0	dBm
Input Voltage	$V_{in}$	0	$V_{cc}$	V

<sup>1</sup> Measured on top side of SFP module at the front center vent hole of the cage.

**Transmitter Performance Characteristics** (Over Operating Case Temperature,  $V_{CC} = 3.13$  to  $3.47V$ )

Parameter	Symbol	Minimum	Typical	Maximum	Units
Operating Data Rate	$B$	0.125	-	2.67	Gb/s
Average Optical Output Power (coupled into single mode fiber) 50% duty cycle	$P_O$	0	-	+ 5.0	dBm
Extinction Ratio	$P_{hi}/P_{lo}$	8.2	-	-	dB
Center Wavelength	$\lambda_c$	1500	1550	1580	nm
Spectral Width (-20dB)	$\Delta\lambda_{20}$	-	-	1.0	nm
Side Mode Suppression Ratio	$SMSR$	30	-	-	dB
Optical Rise/Fall Time (20% to 80%)	$t_r, t_f$	-	-	0.16	ns
Relative Intensity Noise	$RIN$	-	-	- 117	dB/Hz
Jitter Generation	OC-48 $JG$	-	-	0.07	UIp-p
Dispersion Penalty <sup>1</sup>	-	-	-	2.0	dB
Optical Output Eye	Compliant with Telcordia GR-253-CORE and ITU-T Recommendation G.957				

<sup>1</sup> Specified at 1600ps/nm dispersion over G.652/G.654 fiber with center wavelength range of 1500-1580nm.

**Receiver Performance Characteristics** (Over Operating Case Temperature,  $V_{CC} = 3.13$  to  $3.47V$ )

Parameter	Symbol	Minimum	Typical	Maximum	Units
Operating Data Rate	$B$	0.125	-	2.67	Gb/s
Receiver Sensitivity ( $10^{-10}$ BER) <sup>1</sup>	OC-3/12/48, 2.67Gb/s $P_{min}$	- 30.0	-	-	dBm
Receiver Sensitivity ( $10^{-12}$ BER) <sup>2</sup>	2.125Gb/s, 1.25Gb/s, 1.062Gb/s, 0.125Gb/s $P_{min}$	- 28.0	-	-	dBm
Maximum Input Optical Power ( $10^{-10}$ BER)	$P_{max}$	- 8.0	-	-	dBm
LOS Thresholds	Increasing Light Input $P_{los+}$	-	-	- 28.0	dBm
	Decreasing Light Input $P_{los-}$	- 42.0	-	-	
LOS Timing Delay	Increasing Light Input $t_{loss\_off}$	-	-	100	$\mu s$
	Decreasing Light Input $t_{loss\_on}$	2.3	-	100	
LOS Hysteresis	-	0.5 <sup>3</sup>	1.5	-	dB
Wavelength of Operation	$\lambda$	1260	-	1600	nm
Receiver Reflectance	-	-	-	- 27.0	dB

<sup>1</sup> Measured with  $2^{23}-1$  PRBS.  
<sup>2</sup> Measured with  $2^7-1$  PRBS.  
<sup>3</sup> For OC-3, Minimum Hysteresis is 0.2dB.

**Laser Safety:** All transceivers are Class I Laser products per FDA/CDRH and IEC-60825 standards. They must be operated under specified operating conditions.

<b>Oplink Communications, Inc.</b>	
DATE OF MANUFACTURE:	
	
This product complies with 21 CFR 1040.10 and 1040.11 <b>Meets Class I Laser Safety Requirements</b>	

**Transmitter Electrical Interface** (Over Operating Case Temperature,  $V_{CC} = 3.13$  to  $3.47V$ )

Parameter	Symbol	Minimum	Typical	Maximum	Units
Input Voltage Swing (TD+ & TD-) <sup>1</sup>	$V_{PP-DIF}$	0.35	-	1.75	V
Input HIGH Voltage (TX Disable) <sup>2</sup>	$V_{IH}$	2.0	-	$V_{CC}$	V
Input LOW Voltage (TX Disable) <sup>2</sup>	$V_{IL}$	0	-	0.8	V
Output HIGH Voltage (TX Fault) <sup>3</sup>	$V_{OH}$	2.0	-	$V_{CC} + 0.3$	V
Output LOW Voltage (TX Fault) <sup>3</sup>	$V_{OL}$	0	-	0.8	V

<sup>1</sup> Differential peak-to-peak voltage.  
<sup>2</sup> There is an internal 4.7 to 10k $\Omega$  pull-up resistor to  $V_{CC}$ .  
<sup>3</sup> Open collector compatible, 4.7 to 10k $\Omega$  pull-up resistor to  $V_{CC}$  (Host Supply Voltage).

**Receiver Electrical Interface** (Over Operating Case Temperature,  $V_{CC} = 3.13$  to  $3.47V$ )

Parameter	Symbol	Minimum	Typical	Maximum	Units
Output Voltage Swing (RD+ & RD-) <sup>1</sup>	$V_{PP-DIF}$	0.40	-	1.75	V
Output HIGH Voltage (LOS) <sup>2</sup>	$V_{OH}$	$V_{CC} - 1.3$	-	$V_{CC} + 0.3$	V
Output LOW Voltage (LOS) <sup>2</sup>	$V_{OL}$	0	-	0.5	V



<sup>1</sup> Differential peak-to-peak voltage across external 100 $\Omega$  load.  
<sup>2</sup> Open collector compatible, 4.7 to 10k $\Omega$  pull-up resistor to  $V_{CC}$  (Host Supply Voltage).


**Electrical Power Supply Characteristics** (Over Operating Case Temperature,  $V_{CC} = 3.13$  to  $3.47V$ )

Parameter	Symbol	Minimum	Typical	Maximum	Units
Supply Voltage	$V_{CC}$	3.13	3.3	3.47	V
Supply Current	$I_{CC}$	-	175	350	mA

**Module Definition**

MOD_DEF(0) pin 6	MOD_DEF(1) pin 5	MOD_DEF(2) pin 4	Interpretation by Host
TTL LOW	SCL	SDA	Serial module definition protocol

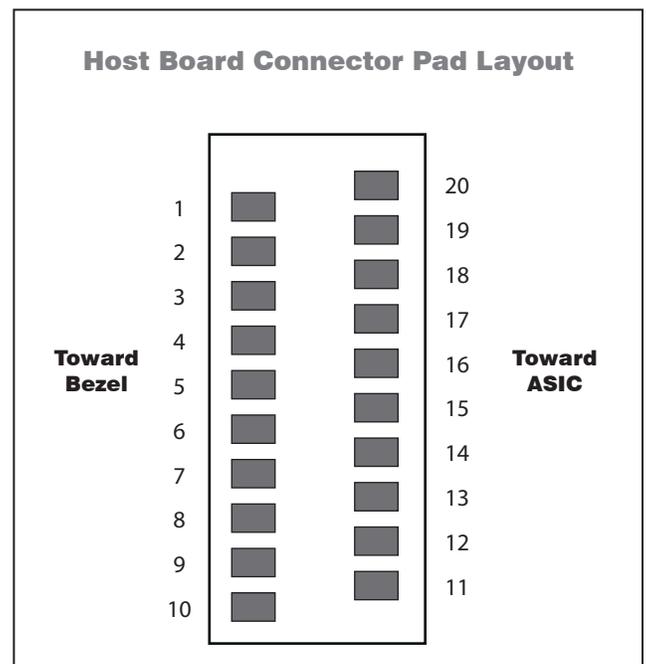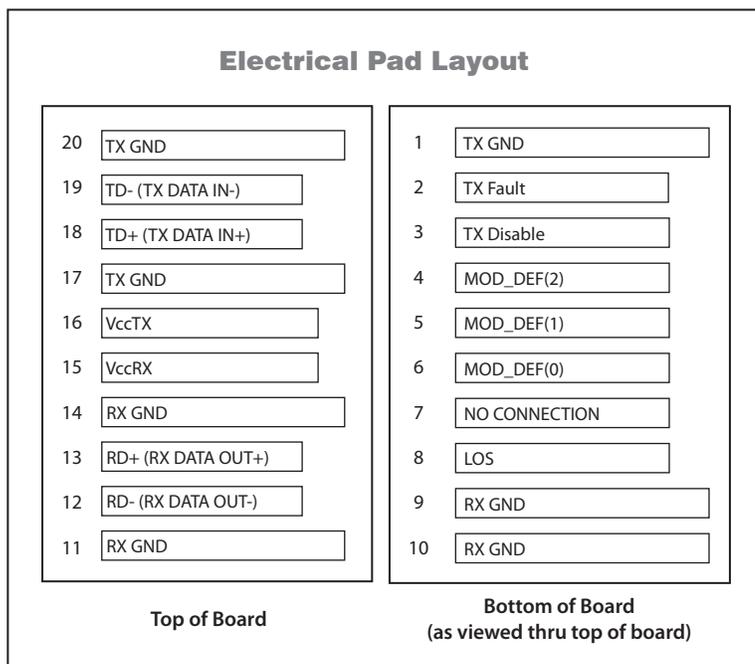

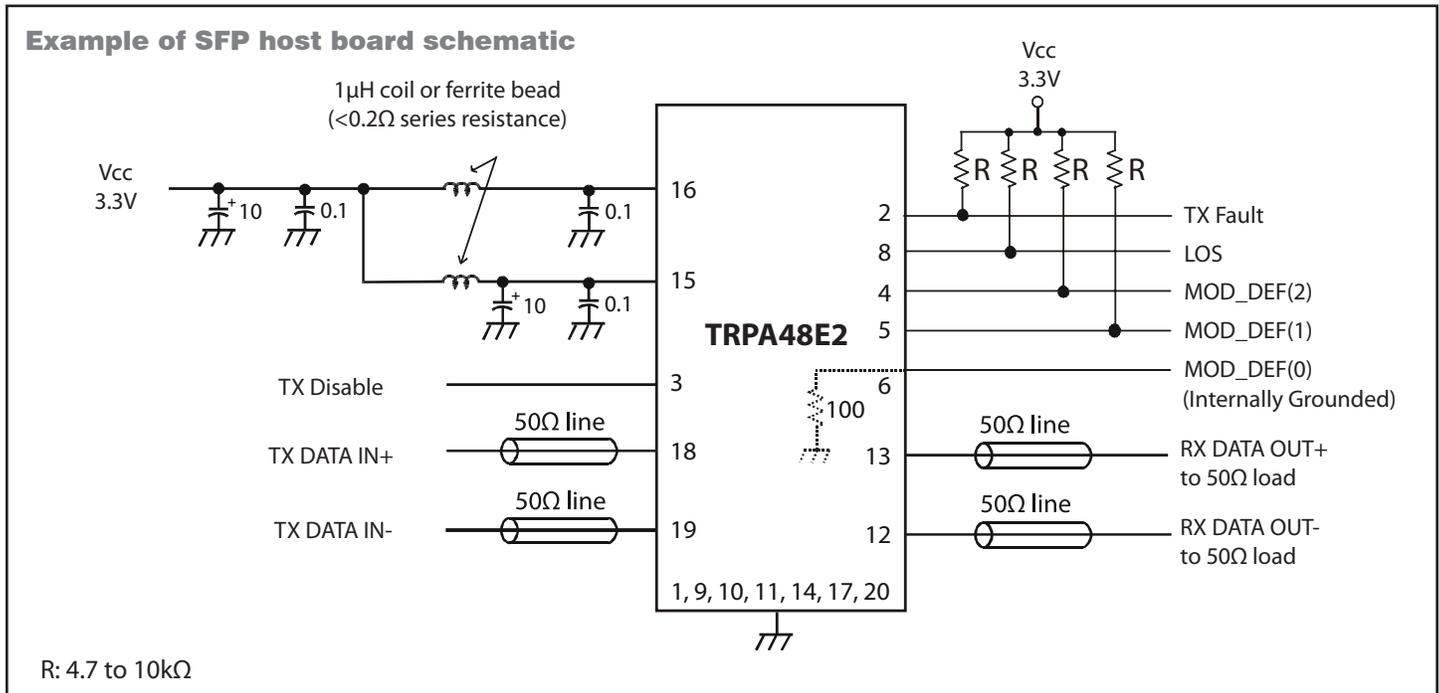

## Application Notes

**Electrical Interface:** All signal interfaces are compliant with the SFP MSA specification. The high speed DATA interface is differential AC-coupled internally with 0.1µF and can be directly connected to a 3.3V SERDES IC. All low speed control and sense output signals are open collector TTL compatible and should be pulled up with a 4.7 - 10kΩ resistor on the host board.

**Loss of Signal (LOS):** The Loss of Signal circuit monitors the level of the incoming optical signal and generates a logic HIGH when an insufficient photocurrent is produced.

**TX Fault:** The output indicates LOW when the transmitter is operating normally, and HIGH with a laser fault including laser end-of-life. TX Fault is an open collector/drain output and should be pulled up with a 4.7 - 10kΩ resistor on the host board. TX Fault is non-latching (automatically deasserts when fault goes away).

**TX Disable:** When the TX Disable pin is at logic HIGH, the transmitter optical output is disabled (less than -45dBm).


**Serial Identification and Monitoring:** The module definition of SFP is indicated by the three module definition pins, MOD\_DEF(0), MOD\_DEF(1) and MOD\_DEF(2). Upon power

up, MOD\_DEF(1:2) appear as NC (no connection), and MOD\_DEF(0) is TTL LOW. When the host system detects this condition, it activates the serial protocol (standard two-wire I<sup>2</sup>C serial interface) and generates the serial clock signal (SCL). The positive edge clocks data into the EEPROM segments of the SFP that are not write protected, and the negative edge clocks data from the SFP.

The serial data signal (SDA) is for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The supported monitoring functions are temperature, voltage, bias current, transmitter power, average receiver signal, all alarms and warnings, and software monitoring of TX Fault/LOS. The device is internally calibrated.

The data transfer protocol and the details of the mandatory and vendor specific data structures are defined in the SFP MSA and SFF-8472, Rev. 9.4.

**Power Supply and Grounding:** The power supply line should be well-filtered. All 0.1µF power supply bypass capacitors should be as close to the transceiver module as possible.

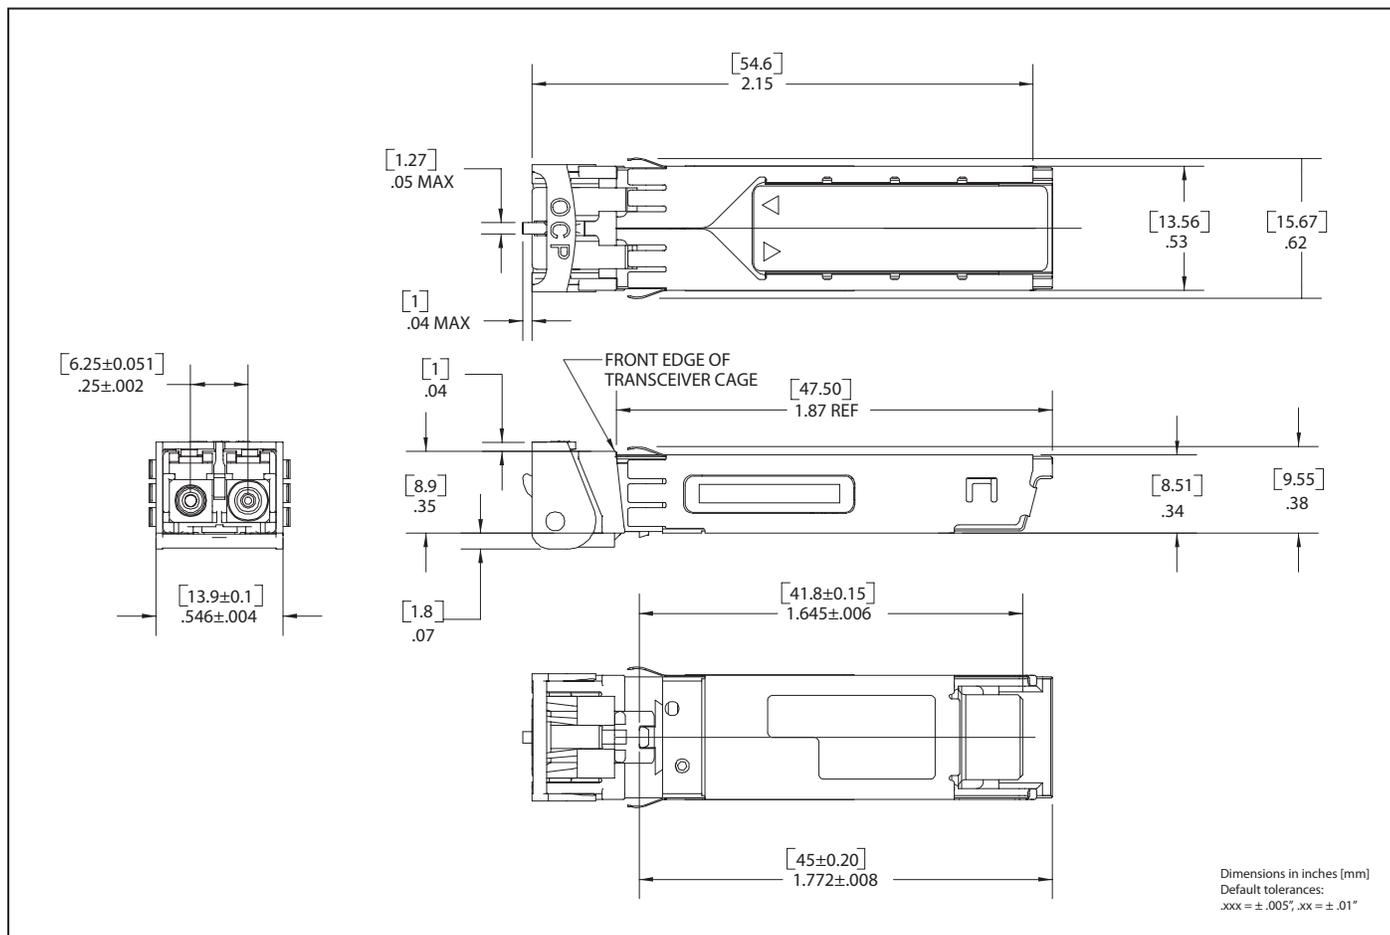**Package Outline**

**Ordering Information**

Oplink can provide a remarkable range of customized optical solutions. For detail, please contact Oplink's Sales and Marketing for your requirements and ordering information (510) 933-7200 or Sales@oplink.com.

Model Name		Operation Temperature	Latch Color	Nominal Wavelength	SONET/SDH Standards	Distance <sup>1</sup>
Oplink Order Number	For Reference (OCP order number)					
TRP148JF3C000FM	TRPA48E2IBFM	- 5 °C to + 70°C	Fuchsia	1310nm	LR-2/L-16.2	Silver
TRP148JF3E000FM	TRPA48E2IEFM	- 5 °C to + 85°C	Fuchsia	1310nm	LR-2/L-16.2	Silver

<sup>1</sup> The indicated transmission distance is for guidelines only, not guaranteed. Longer distances can be supported if the optical link power budget is satisfied.