


# Schottky Powermod FST16230

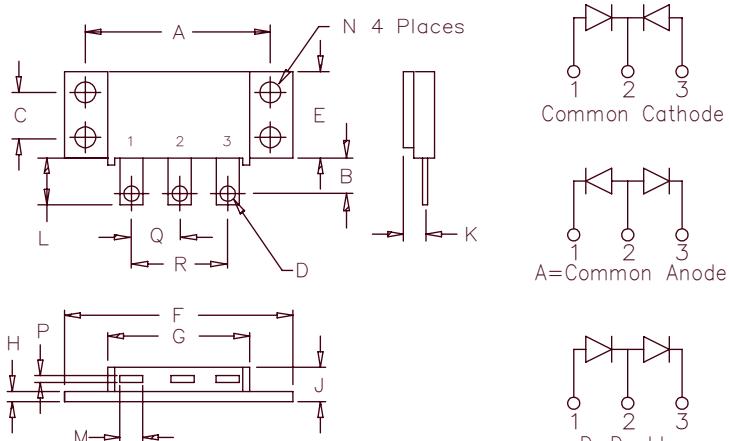

Notes:  
 Baseplate: Nickel plated copper;  
 electrically isolated  
 Pins: Nickel plated copper

Dim.		Inches	Millimeters	
			Min.	Max.
A	1.995	2.005	50.67	50.93
B	0.300	0.325	7.62	8.26
C	0.495	0.505	12.57	12.83
D	0.182	0.192	4.62	4.88
E	0.990	1.010	25.15	25.65
F	2.390	2.410	60.71	61.21
G	1.500	1.525	38.10	38.70
H	0.120	0.130	3.05	3.30
J	---	0.400	---	10.16
K	0.240	0.260	6.10	6.60 to Lead Q
L	0.490	0.510	12.45	12.95
M	0.330	0.350	8.38	6.90
N	0.175	0.195	4.45	4.95
P	0.035	0.045	0.89	1.14
Q	0.445	0.455	11.30	11.56
R	0.890	0.910	22.61	23.11

TO-249

Microsemi Catalog Number	Industry Part Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
FST16230*	162CMQ030	30V		30V

- Schottky Barrier Rectifier
- Guard Ring for Reverse Protection
- V<sub>RRM</sub> = 30 Volts
- High Surge Capacity
- Reverse Energy Tested
- ROHS Compliant

\*Add the Suffix A for Common Anode, D for Doubler

## Electrical Characteristics

Average forward current per pkg	I <sub>F(AV)</sub> 160 Amps	T <sub>C</sub> = 83°C, Square wave, R <sub>θJC</sub> = 0.5°C/W
Average forward current per leg	I <sub>F(AV)</sub> 80 Amps	T <sub>C</sub> = 83°C, Square wave, R <sub>θJC</sub> = 1.0°C/W
Maximum surge current per leg	I <sub>FSM</sub> 1000 Amps	8.3 ms, half sine T <sub>J</sub> = 150°C
Max repetitive peak reverse current per leg	I <sub>R(OV)</sub> 2 Amps	f = 1 KHz, 25°C, 1μsec Square wave
Max peak forward voltage per leg	V <sub>FM</sub> .55 Volts	I <sub>FM</sub> = 80A: T <sub>J</sub> = 125°C*
Max peak forward voltage per leg	V <sub>FM</sub> .59 Volts	I <sub>FM</sub> = 80A: T <sub>J</sub> = 25°C*
Max peak reverse current per leg	I <sub>RM</sub> 300 mA	V <sub>RRM</sub> , T <sub>J</sub> = 125°C*
Max peak reverse current per leg	I <sub>RM</sub> 1 mA	V <sub>RRM</sub> , T <sub>J</sub> = 25°C
Typical junction capacitance per leg	C <sub>J</sub> 2400 pF	V <sub>R</sub> = 5.0V, T <sub>J</sub> = 25°C

\*Pulse test: Pulse width 300μsec, Duty cycle 2%

## Thermal and Mechanical Characteristics

Storage temp range	T <sub>TSG</sub>	-55°C to 175°C
Operating junction temp range	T <sub>J</sub>	-55°C to 150°C
Maximum thermal resistance per leg	R <sub>θJC</sub>	1.0°C/W Junction to case
Maximum thermal resistance per pkg.	R <sub>θJC</sub>	0.5°C/W Junction to case
Typical thermal resistance (greased)	R <sub>θCS</sub>	0.1°C/W Case to sink
Mounting torque		15 – 20 inch pounds
Weight		2.5 ounces (71 grams) typical

# FST16230

Figure 1  
Typical Forward Characteristics – Per Leg

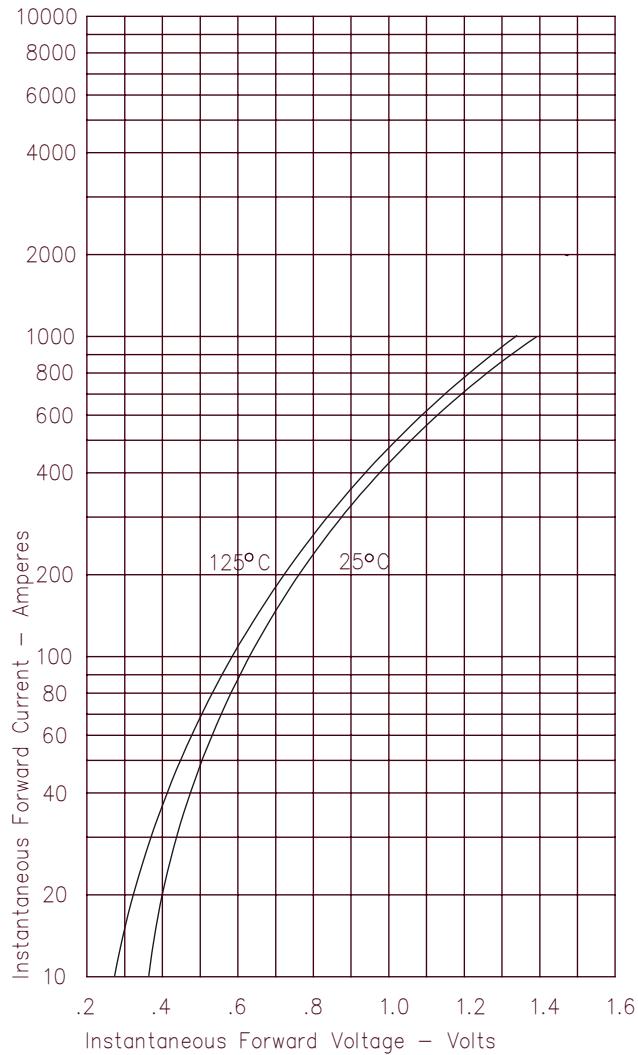


Figure 2  
Typical Reverse Characteristics – Per Leg

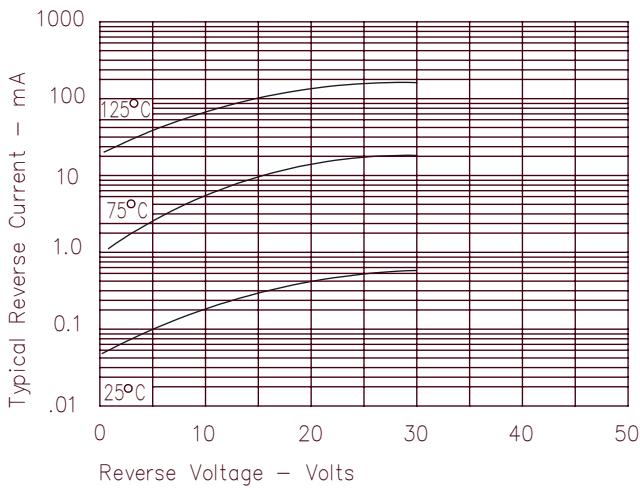


Figure 3  
Typical Junction Capacitance – Per Leg

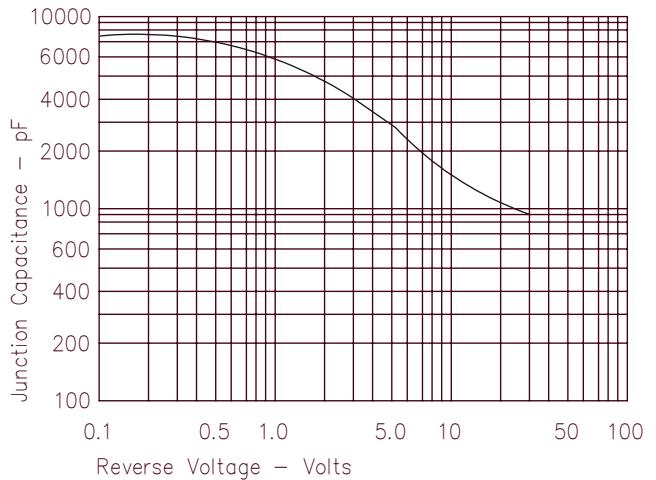


Figure 4  
Forward Current Derating – Per Leg

