

# G100EI Series

## Low Cost, 1W MiniDIP High Isolation DC/DC Converters



### Key Features:

- 1W Output Power
- Compact "MiniDIP" Case
- 3,000 VDC Isolation
- UL Approved (File E245422)
- Single & Dual Outputs
- >3.5 MHour MTBF
- 24 Standard Models
- **LOWEST COST!!**



RoHS Compliant



**MicroPower Direct**  
292 Page Street  
Suite D  
Stoughton, MA 02072  
USA

T: (781) 344-8226  
F: (781) 344-8481  
E: sales@micropowerelectronics.com  
W: www.micropowerelectronics.com



### Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

#### Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range	5 VDC Input	4.5	5.0	5.5	VDC
	12 VDC Input	10.8	12.0	13.2	
	24 VDC Input	21.6	24.0	26.4	
Input Filter	Internal Capacitor				
Reverse Polarity Input Current				0.3	A

#### Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Accuracy			±1.0	±3.0	%
Output Voltage Balance	Dual Output, Balanced Loads		±0.1	±1.0	%
Line Regulation	For Vin Change of 1%		±1.2		%
Load Regulation (Note 1)	See Model Selection Guide				
Ripple & Noise (20 MHz) (Note 2)			50	75	mV P - P
Output Power Protection		120			%
Temperature Coefficient			±0.02	±0.03	%/°C
Output Short Circuit	Momentary (1.0 Sec.)				

#### General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	60 Seconds	3,000			VDC
Isolation Resistance	500 VDC	1,000			MΩ
Isolation Capacitance	100 kHz, 1V		60		pF
Switching Frequency			150		kHz

#### Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	-40	+25	+85	°C
Storage Temperature Range		-55		+125	°C
Cooling	Free Air Convection				
Humidity	RH, Non-condensing			95	%

#### Physical

Case Size	0.80 x 0.40 x 0.25 Inches (20.4 x 10.2 x 6.5 mm)				
Case Material	Non-Conductive Black Plastic (UL94-V0)				
Weight	0.07 Oz (2.1g)				

#### Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	3.5			MHours
Safety Standards	UL 1950, EN 60950, IEC 60950				
Safety Approvals	UL, cUL; File No. E245422				

#### Absolute Maximum Ratings

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Surge (1 Sec)	5 VDC Input	-0.7		9.0	VDC
	12 VDC Input	-0.7		18.0	
	24 VDC Input	-0.7		30.0	
Lead Temperature	1.5 mm From Case For 10 Sec			300	°C
Internal Power Dissipation	All Models			450	mW

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.

# Model Selection Guide

Model Number	Input				Output			Load Regulation (% Max)	Efficiency (% Typ)	Fuse Rating Slow-Blow (mA)
	Voltage (VDC)		Current (mA)		Voltage (VDC)	Current (mA, Max)	Current (mA, Min)			
	Nominal	Range	Full-Load	No-Load						
G101EI	5	4.5 - 5.5	286	30	5.0	200.0	20.0	15	70	500
G102EI	5	4.5 - 5.5	267	30	9.0	111.0	12.0	15	75	500
G103EI	5	4.5 - 5.5	256	30	12.0	83.0	9.0	15	78	500
G104EI	5	4.5 - 5.5	250	30	15.0	67.0	7.0	15	80	500
G105EI	5	4.5 - 5.5	278	30	±5.0	±100.0	±10.0	15	72	500
G106EI	5	4.5 - 5.5	267	30	±9.0	±56.0	±6.0	15	75	500
G107EI	5	4.5 - 5.5	256	30	±12.0	±42.0	±5.0	15	78	500
G108EI	5	4.5 - 5.5	253	30	±15.0	±33.0	±4.0	15	79	500
G111EI	12	10.8 - 13.2	115	15	5.0	200.0	20.0	15	72	200
G112EI	12	10.8 - 13.2	110	15	9.0	111.0	12.0	15	76	200
G113EI	12	10.8 - 13.2	105	15	12.0	83.0	9.0	15	79	200
G114EI	12	10.8 - 13.2	103	15	15.0	67.0	7.0	15	81	200
G115EI	12	10.8 - 13.2	113	15	±5.0	±100.0	±10.0	15	74	200
G116EI	12	10.8 - 13.2	110	15	±9.0	±56.0	±6.0	15	76	200
G117EI	12	10.8 - 13.2	105	15	±12.0	±42.0	±5.0	15	79	200
G118EI	12	10.8 - 13.2	104	15	±15.0	±33.0	±4.0	15	80	200
G121EI	24	21.6 - 26.4	57	8	5.0	200.0	20.0	15	73	100
G122EI	24	21.6 - 26.4	54	8	9.0	111.0	12.0	15	77	100
G123EI	24	21.6 - 26.4	52	8	12.0	83.0	9.0	15	80	100
G124EI	24	21.6 - 26.4	51	8	15.0	67.0	7.0	15	82	100
G125EI	24	21.6 - 26.4	56	8	±5.0	±100.0	±10.0	15	74	100
G126EI	24	21.6 - 26.4	55	8	±9.0	±56.0	±6.0	15	76	100
G127EI	24	21.6 - 26.4	52	8	±12.0	±42.0	±5.0	15	80	100
G128EI	24	21.6 - 26.4	51	8	±15.0	±33.0	±4.0	15	81	100


Other input/output combinations are available (i.e 3.3 VDC). Contact the factory for details at: [sales@micropowerdirect.com](mailto:sales@micropowerdirect.com)

**Notes:**


- Output load regulation is specified for a load change of 10% to 100%.
- These units should not be operated with a load under 10% of full load. Operation at no-load may cause damage to the unit.
- These converters will operate without external components. However, when measuring output ripple, it is recommended that an external ceramic capacitor be placed from the +Vout pin to the -Vout pin for single output units and from each output to common for dual output units. An input capacitor will enhance stability over temperature and input line variations. Recommended capacitor values are given in the table above. For applications requiring very low output noise levels, a simple LC filter should be effective.
- Dual output units may be connected to provide a 10V, 18V, 24V or 30 VDC output. To do this, connect the load across the positive (+Vout) and negative (-Vout) outputs and float the output common
- It is recommended that a fuse be used on the input of a power supply for protection. See the Model Selection table above for the correct rating.

Vin	Input Capacitor	Vout	Output Capacitor	
			Single	Dual
5 VDC	4.7 $\mu$ F	5 VDC	10.0 $\mu$ F	4.7 $\mu$ F
12 VDC	2.2 $\mu$ F	9 VDC	4.7 $\mu$ F	2.2 $\mu$ F
24 VDC	1.0 $\mu$ F	12 VDC	2.2 $\mu$ F	1.0 $\mu$ F
		15 VDC	1.0 $\mu$ F	0.47 $\mu$ F

## Derating Curve

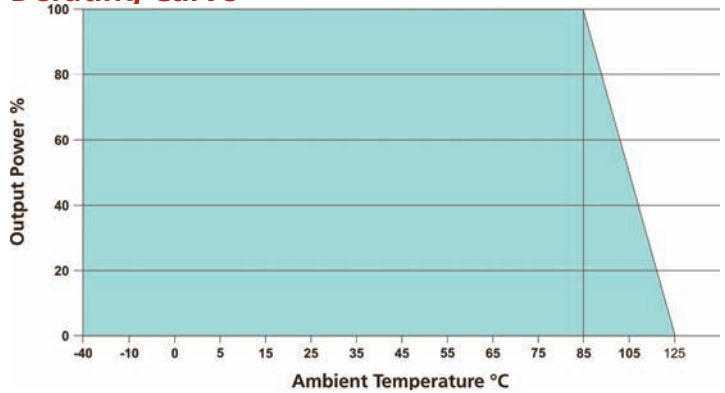

## Mechanical Dimensions

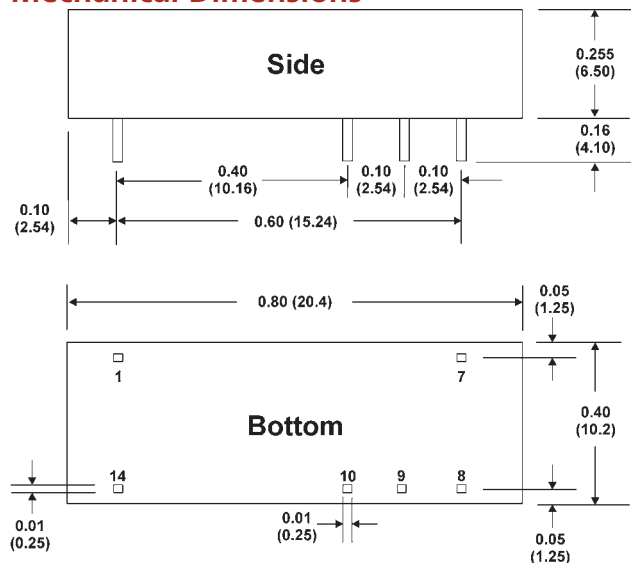

## Pin Connections

Pin	Single	Dual	Pin	Single	Dual
1	-Vin	-Vin	9	No Pin	Common
7	NC	NC	10	-Vout	-Vout
8	+Vout	+Vout	14	+Vin	+Vin

NC= No Connection

**Notes:**

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ±0.01 (±0.25)
- Pin 1 is marked by a "dot" or indentation on the side of the unit



# MicroPower Direct

[www.micropowerdirect.com](http://www.micropowerdirect.com)

292 Page Street Ste D Stoughton, MA 02072 • TEL: (781) 344-8226 • FAX: (781) 344-8481 • E-Mail: [sales@micropowerdirect.com](mailto:sales@micropowerdirect.com)