


CATALOG NO.	A	B	C
SREC 7 PJ	.21	.78	.502
③ SREC 11 PJ	.28	.78	.531
SREC 14 PJ	.28	.88	.625
③ SREC 18 PJ	.39	.88	.656
SREC 20 PJ	.28	1.06	.814
SREC 26 PJ	.28	1.25	1.000
SREC 34 PJ	.39	1.25	1.032
③ SREC 44 PJ	.39	1.48	1.267
SREC 50 PJ	.39	1.63	1.408

- ① MOLDING, MALE - DIALYL PHTHALATE, MIL-M-14, 30G-F
- ② PIN CONTACT - LEADED COMM'L BRONZE, GOLD OVER COPPER
- ③ CLIP - BERYLLIUM COPPER, QQ-C-533, GOLD OVER COPPER
- ④ JACKSCREW - STAINLESS STEEL, QQ-S-763, PASSIVATING DIP
- ⑤ JACKSOCKET - STAINLESS STEEL, QQ-S-763, PASSIVATING DIP
- ⑥ LOCKWASHER - PHOSPHOR BRONZE, QQ-B-750, CAD. PLATE PLUS NAT. IRIDITE
- ⑦ NUT - BRASS, QQ-B-62G, CAD. PLATE PLUS NAT. IRIDITE

NOTE 1-
 1. ** INDICATES NO. OF CONTACTS
 2. WHEN 2-56 UNC-2 THREADS ARE REQUIRED, SPECIFY CATALOG NO. AND SUFFIX DASH NO. - 859
 ③ 3. CONTACTS WITH CLIPS ASSEMBLED ARE NOT INCLUDED WITH CONNECTOR & MUST BE ORDERED SEPARATELY
 ④ - 859 NOT AVAILABLE ON SIZE 44

FACES OF THE "SREC" MOLDINGS

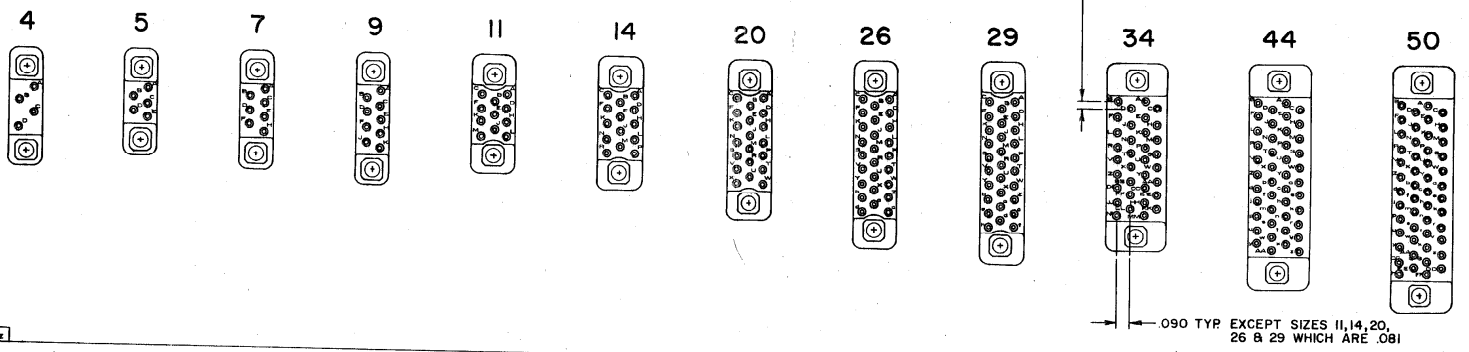

This drawing, the design and data thereon, and the information contained hereon, are the property of Winchester Electronics Corporation and are to be kept confidential. No part of this drawing, design, or data is to be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the written permission of Winchester Electronics Corporation.		TOLERANCE UNLESS OTHERWISE SPECIFIED: $\pm .002$ $\pm .001$ ANGULAR = $\pm .007$		TITLE COMPOSITE OUTLINE ASSY SREC ** PJ SREC ** PJ - 859	
KEY A FINISHED B UNFINISHED C PARTS LISTED D REVISED PARTS LISTED	CHANGE 1 2 3 4	DATE 10-7-65 10-21-65 11-18-65 12-12-65	BY J.K. F. E.N. R.W.	CHECKED J.K. F. E.N. R.W.	DATE 2-2-66 2-2-66 2-2-64
DWG. NO. 20906				DWG. SIZE C	