


350-7414 Spacer/Stand-off, hexagonal, threaded, swage mount

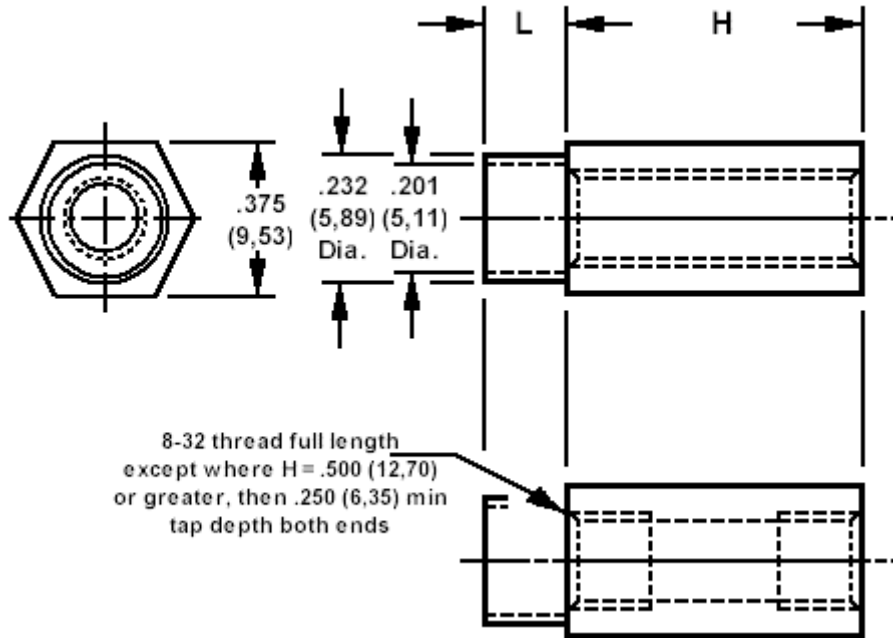

How to order code 350-7414-XX-YY-00

Basic Part No XX = H & L dimensions, YY = Plating Finish

| DIMENSIONS (XX) | | | | | |
|------------------------|-------------|-------------|-------------|---------------|-------------|
| Basic Part # | (XX) | | | H | Swage Anvil |
| 350-7414 | -09 | -17 | -25 | .125 (3,18) | A |
| | -10 | -18 | -26 | .188 (4,78) | A |
| | -11 | -19 | -27 | .250 (6,35) | A |
| | -12 | -20 | -28 | .375 (9,53) | A |
| | -13 | -21 | -29 | .500 (12,70) | A |
| | -14 | -22 | -30 | .625 (15,88) | A |
| | -15 | -23 | -31 | .750 (19,05) | A |
| | -16 | -24 | -32 | 1.000 (25,40) | A |
| L | .109 (2,77) | .141 (3,58) | .172 (4,37) | | |
| Board Thickness | .062 (1,59) | .094 (2,38) | .125 (3,18) | | |

| MATERIALS | | |
|------------------|-----------|----------------|
| Component | Material | Finish (YY) |
| | | -19 |
| Spacer/Stand-Off | Aluminium | Clear Chromate |

| SWAGE TOOLING | | |
|-----------------------------|---|--------------------|
| Recommended Swaging Tools:- | | |
| Punch | | 435-6675-01-00-00 |
| Anvil | A | 435-6027-01-00-00* |

* Not for use in bench press 435-3803-01-00-00