



TITLE INDUCTOR, PQ26X10.2 mm, 1 μH, 50 ADC

PN 39774

REV 1



AGENCY APPROVAL: NA

SH 2 OF 18


**SPECIFICATIONS:**

TEMPERATURE RATING: 130°C STORAGE, 100°C OPERATIONAL.

1. INDUCTANCE: 0.9 - 1.1 μH @ 0.1 VRMS, 100 kHz.
2. DC RESISTANCE: 0.82 mOHMS MAX.
3. HIPOT (2 SECONDS, 5 mA MAX): 300 VRMS WINDING TO CORE.

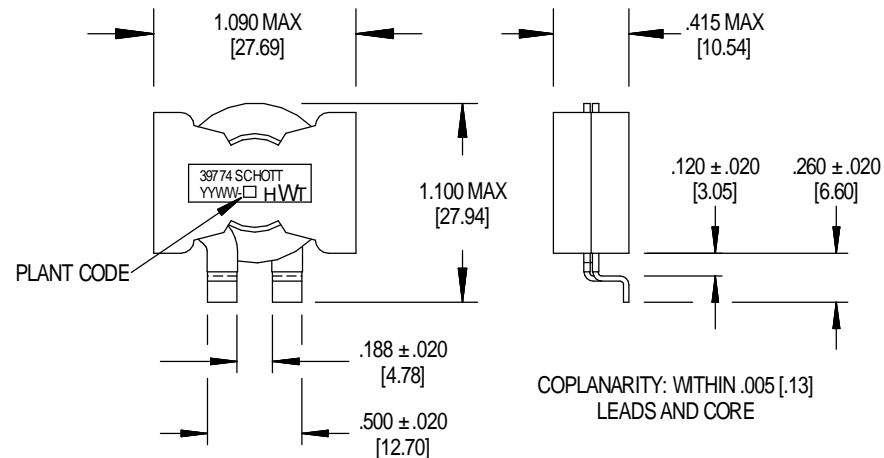

**SUGGESTED PCB FOOTPRINT IN (mm)**

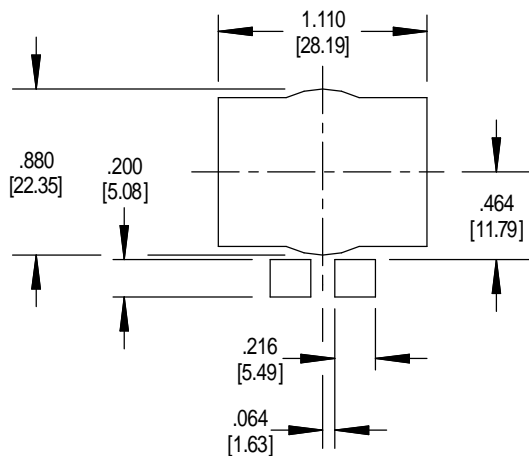

INCHES / DECIMAL	.XX = ± .01	.XXX = ±.005	ANGLES ± 1°
MILLIMETERS (mm)	.XX = ± 0.20		