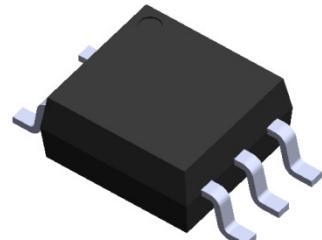



**Features:**

- High speed 10Mbit/s
- Guaranteed performance from -40 to 85°C
- Logic gate output
- High isolation voltage between input and output ( $V_{iso}=3750$  V rms )
- Pb free and RoHS compliant.
- UL approved (No. 214129)
- VDE approved (No. 132249)
- SEMKO approved
- NEMKO approved
- DEMKO approved
- FIMKO approved
- CSA approved (No. 2037145)

Schematic**Description**

The ELM600, ELM601 and ELM611 are consists of an infrared emitting diode optically coupled to a high speed integrated photo detector logic gate with a strobeable output.

The devices are packaged in a 5-pin small outline package which conforms to the standard footprint.

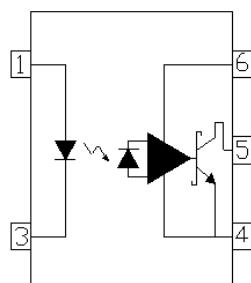**Applications**

- Ground loop elimination
- LSTTL to TTL, LSTTL or 5 volt CMOS
- Line receiver, data transmission
- Data multiplexing
- Switching power supplies
- Pulse transformer replacement
- Computer peripheral interface

Pin Configuration

- 1, Anode
- 3, Cathode
- 4, Gnd
- 5, Vout
- 6, VCC

**Truth Table**

Input	Output
H	L
L	H

**Absolute Maximum Ratings ( $T_a=25^\circ\text{C}$ )**

Parameter		Symbol	Rating	Unit
Input	Forward current	$I_F$	50	mA
	Reverse voltage	$V_R$	5	V
	Power dissipation	$P_D$	100	mW
Output	Power dissipation	$P_C$	85	mW
	Output current	$I_O$	50	mA
	Output voltage	$V_O$	7.0	V
	Supply voltage	$V_{CC}$	7.0	V
Output Power Dissipation		$P_O$	85	mW
Isolation voltage <sup>*1</sup>		$V_{ISO}$	3750	V rms
Operating temperature		$T_{OPR}$	-40 ~ +85	°C
Storage temperature		$T_{STG}$	-55 ~ +125	°C
Soldering temperature <sup>*2</sup>		$T_{SOL}$	260	°C

**Notes**

\*1 AC for 1 minute, R.H.= 40 ~ 60% R.H. In this test, pins 1 & 3 are shorted together, and pins 4 , 5 & 6 are shorted together.

\*2 For 10 seconds.

**Electrical Characteristics ( $T_a = -40$  to  $85^\circ\text{C}$  unless specified otherwise)**
**Input**

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition
Forward voltage	$V_F$	-	1.45	1.8	V	$I_F = 10\text{mA}$
Reverse voltage	$V_R$	5.0	-	-	V	$I_R = 10\mu\text{A}, T_A = 25^\circ\text{C}$
Temperature coefficient of forward voltage	$\Delta V_F / \Delta T_A$	-	-1.9	-	mV/°C	$I_F = 10\text{mA}$
Input capacitance	$C_{IN}$	-	70	-	pF	$V_F = 0, f = 1\text{MHz}$

**Output**

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition
High level supply current	$I_{CCH}$	-	6.0	9	mA	$I_F = 0\text{mA}, V_{CC} = 5.5\text{V}$
Low level supply current	$I_{CCL}$	-	7.5	10	mA	$I_F = 10\text{mA}, V_{CC} = 5.5\text{V}$

**Transfer Characteristics**

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition
HIGH Level Output Current	$I_{OH}$	-	2.1	30	uA	$V_{CC} = 5.5\text{V}, V_O = 5.5\text{V}, I_F = 250\mu\text{A}$
LOW Level Output Current	$V_{OL}$	-	0.4	0.6	V	$V_{CC} = 5.5\text{V}, I_F = 5\text{mA}, I_{CL}(\text{Sinking}) = 13\text{mA}$
Input Threshold Current	$I_{FT}$	-	2.4	5	mA	$V_{CC} = 5.5\text{V}, V_O = 0.6\text{V}, I_{OL}(\text{Sinking}) = 13\text{mA}$

**Switching Characteristics (Ta=-40 to 85 °C, V<sub>CC</sub>=5V, I<sub>F</sub>=7.5mA unless specified otherwise)**

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition
Propagation delay time to output High level <sup>*3</sup> (Fig.12)	T <sub>PHL</sub>	-	41	100	ns	C <sub>L</sub> = 15pF, R <sub>L</sub> =350Ω, TA=25°C
Propagation delay time to output Low level <sup>*3</sup> (Fig.12)	T <sub>PLH</sub>	-	50	100	ns	C <sub>L</sub> = 15pF, R <sub>L</sub> =350Ω, TA=25°C
Pulse width distortion	T <sub>phl</sub> – T <sub>plh</sub>	-	9	35	ns	C <sub>L</sub> = 15pF, R <sub>L</sub> =350Ω
Propagation Delay Skew <sup>*4</sup>	t <sub>PSK</sub>	-	-	40	ns	C <sub>L</sub> = 15pF, R <sub>L</sub> =350Ω
Output rise time (Fig.12)	tr	-	40	-	ns	C <sub>L</sub> = 15pF, R <sub>L</sub> =350Ω
Output fall time (Fig.12)	tf	-	10	-	ns	C <sub>L</sub> = 15pF, R <sub>L</sub> =350Ω
Common Mode Transient Immunity at Logic High <sup>*6</sup> (Fig.14)	M600	CM <sub>H</sub>	-	-	V/μS	I <sub>F</sub> = 7.5mA , V <sub>OH</sub> =2.0V, R <sub>L</sub> =350Ω, TA=25°C V <sub>CM</sub> =10Vp-p
	M601		5,000			I <sub>F</sub> = 7.5mA , V <sub>OH</sub> =2.0V, R <sub>L</sub> =350Ω, TA=25°C V <sub>CM</sub> =50Vp-p
	M611		20,000			I <sub>F</sub> = 7.5mA , V <sub>OH</sub> =2.0V, R <sub>L</sub> =350Ω, TA=25°C V <sub>CM</sub> =1000Vp-p
Common Mode Transient Immunity at Logic Low <sup>*7</sup> (Fig.14)	M600	CM <sub>L</sub>	-	-	V/μS	I <sub>F</sub> = 0mA , V <sub>OL</sub> =0.8V, R <sub>L</sub> =350Ω, TA=25°C V <sub>CM</sub> =10Vp-p
	M601		5,000			I <sub>F</sub> = 0mA , V <sub>OL</sub> =0.8V, R <sub>L</sub> =350Ω, TA=25°C V <sub>CM</sub> =50Vp-p
	M611		20,000			I <sub>F</sub> = 0mA , V <sub>OL</sub> =0.8V, R <sub>L</sub> =350Ω, TA=25°C V <sub>CM</sub> =1000Vp-p

\*All typicals at Ta = 25°C, VCC = 5 V.

### Typical Performance Curves

Figure 1. Forward Current vs Forward Voltage

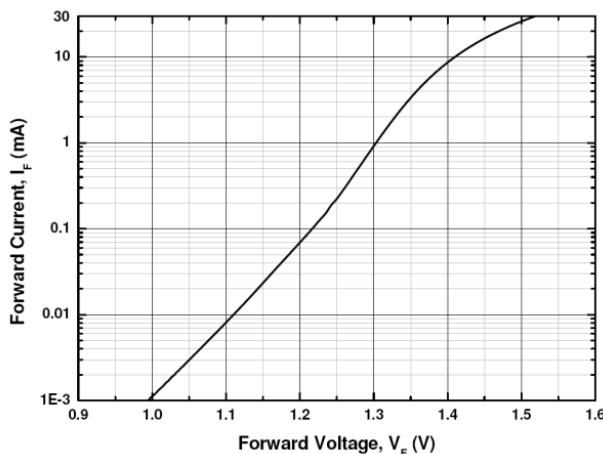


Figure 3. Low Level Output Current  
vs Ambient Temperature

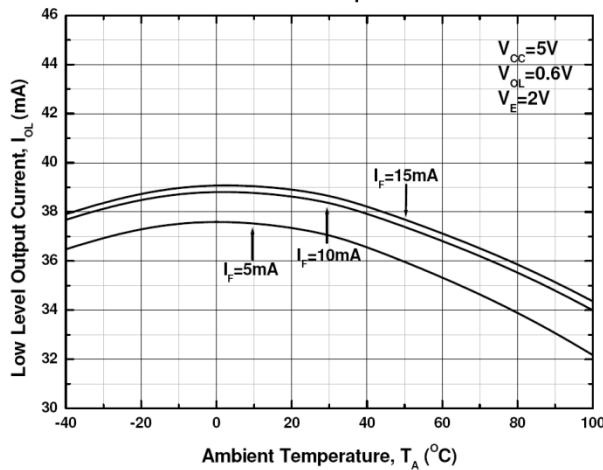


Figure 5. Input Current vs Output Voltage

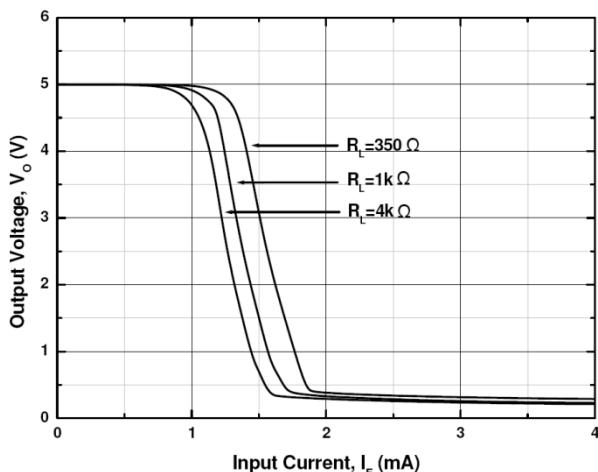


Figure 2. Low Level Output Voltage  
vs Ambient Temperature

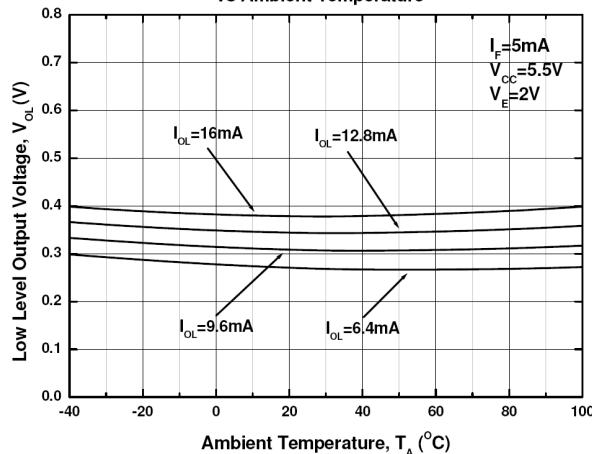


Figure 4. Input Threshold Current  
vs Ambient Temperature

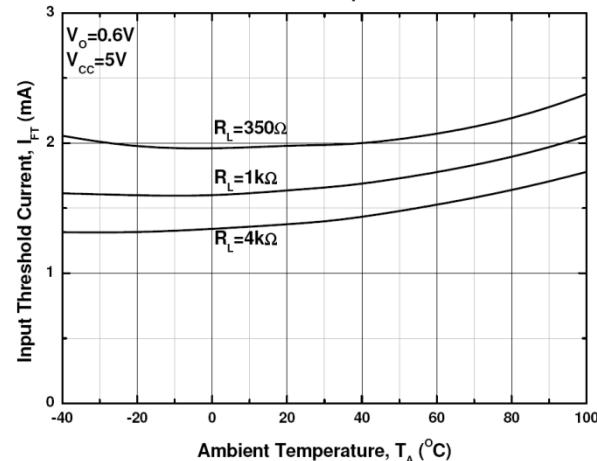


Figure 6. High Level Output Current  
vs Ambient Temperature

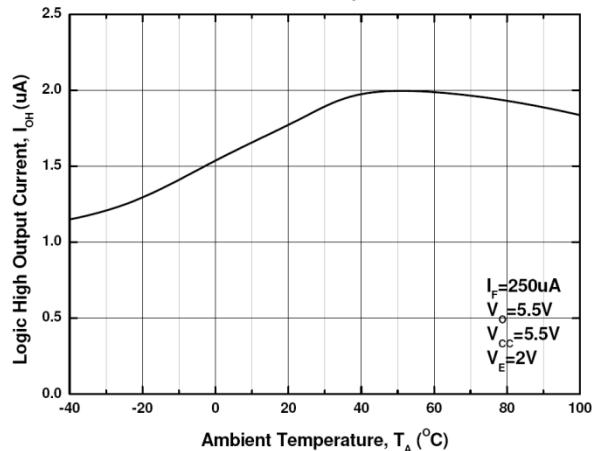


Figure 7. Propagation Delay vs. Forward Current

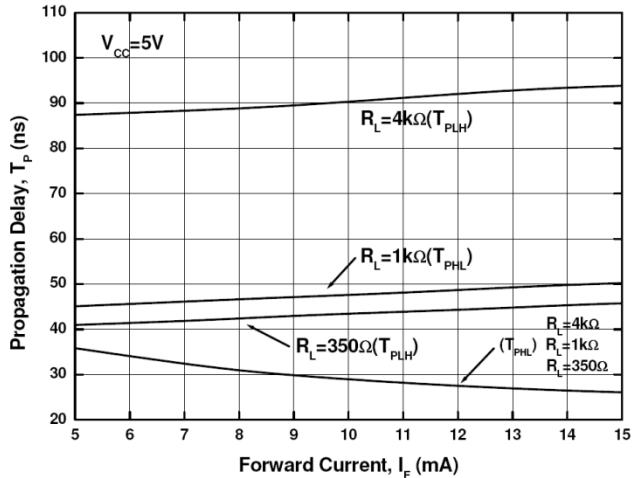


Figure 9. Pulse Width Distortion vs. Temperature

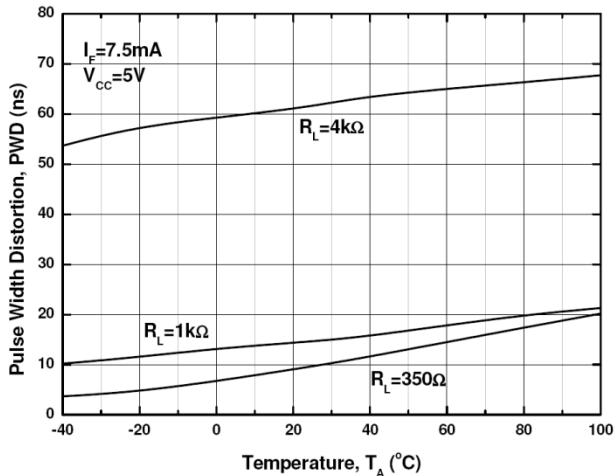


Figure 10. Rise and Fall Time vs. Temperature

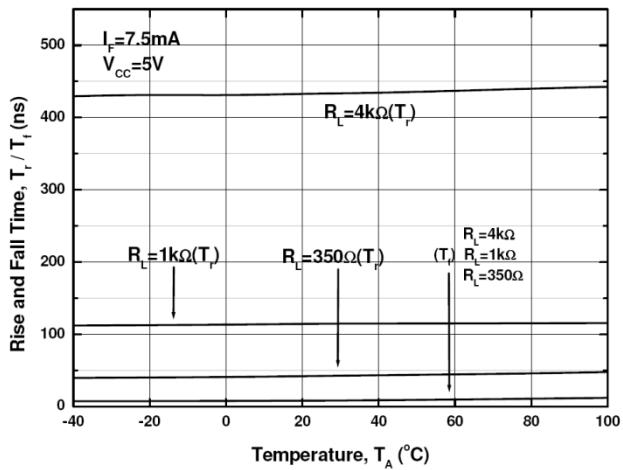


Fig. 11 Test circuit and waveforms for  $t_{PHL}$ ,  $t_{PLH}$ ,  $t_r$ , and  $t_f$




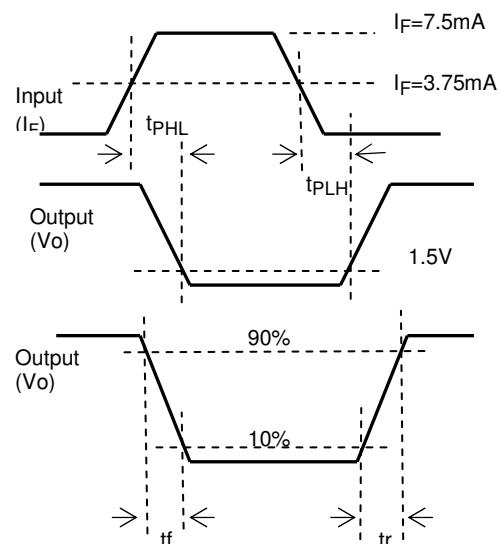


Fig. 12 Test circuit Common mode Transient Immunity

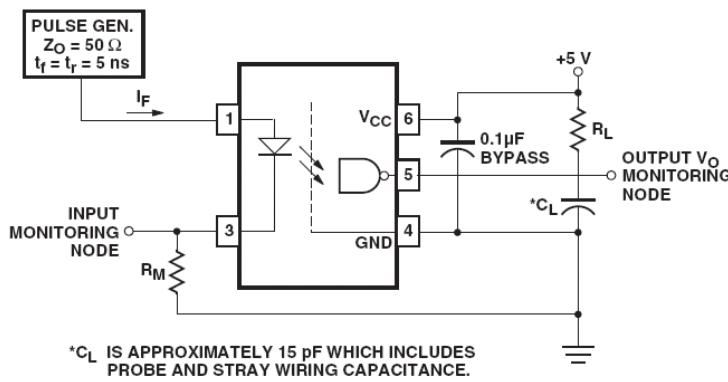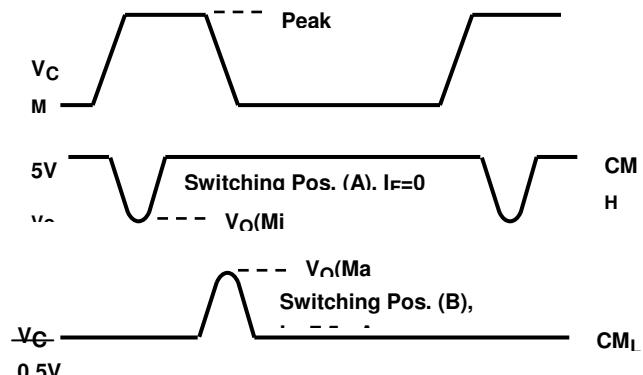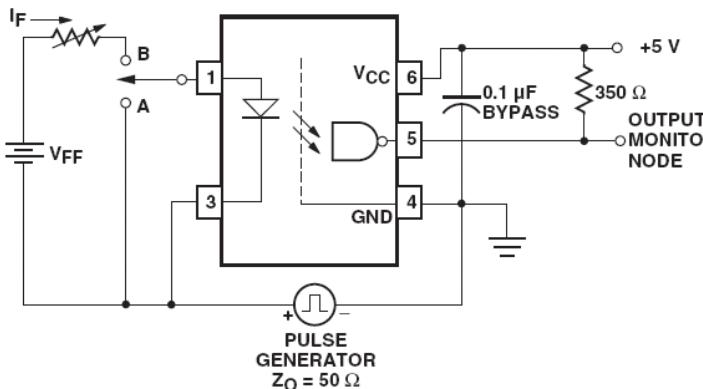

### Notes:

- \*3 The  $t_{PLH}$  propagation delay is measured from 3.75 mA point on the falling edge of the input pulse to the 1.5V point on the rising edge of the output pulse.
- \*4 The  $t_{PHL}$  propagation delay is measured from 3.75 mA point on the rising edge of the input pulse to the 1.5 V point on the falling edge of the output pulse
- \*5  $t_{PSK}$  is equal to the magnitude of the worst case difference in  $t_{PHL}$  and/or  $t_{PLH}$  that will be seen between units at any given temperature within the worst case operating condition range.
- \*6 CMH—The maximum tolerable rate of rise of the common mode voltage to ensure the output will remain in the HIGH state (i.e.,  $V_{OUT} > 2.0V$ ).
- \*7 CML—The maximum tolerable rate of fall of the common mode voltage to ensure the output will remain in the LOW output state (i.e.,  $V_{OUT} < 0.8V$ ).




**Order Information****Part Number****ELM6XX(Z)-V****Note**


XX = Part no.(00, 01 or 11)  
Z = Tape and reel option (TA, TB or none).  
V = VDE (optional)

Option	Description	Packing quantity
None	Standard DIP-8	100 units per tube
(TA)	Surface mount lead form + TA tape & reel option	3000 units per reel
(TB)	Surface mount lead form + TB tape & reel option	3000 units per reel

**Package Drawing**

(Dimensions in mm)

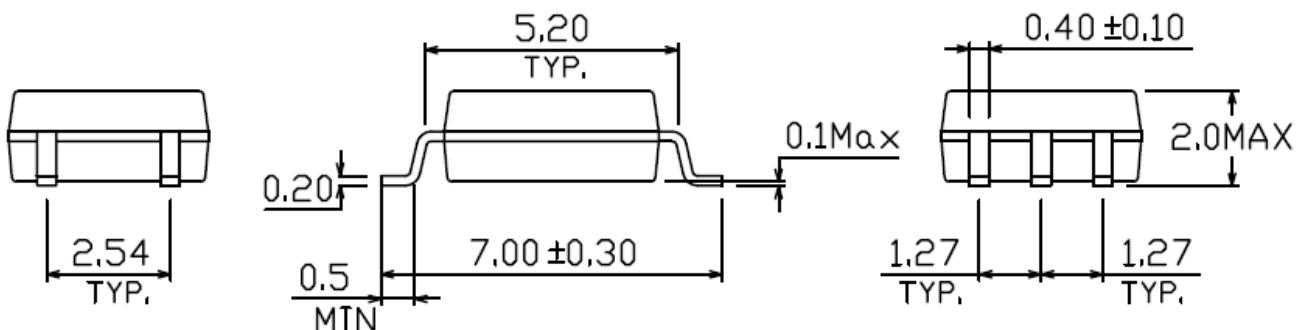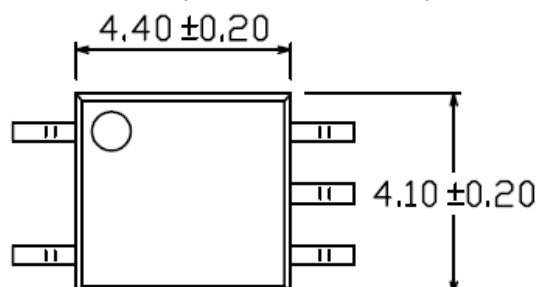
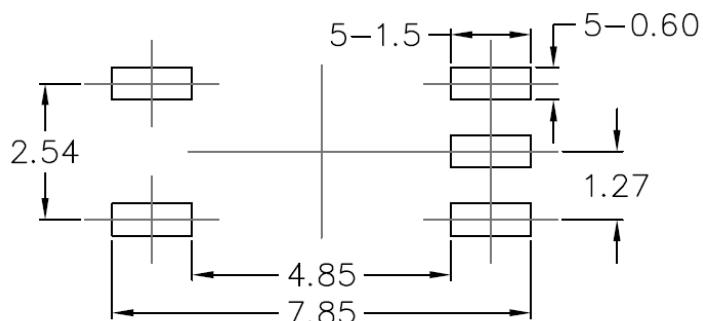
**Recommended pad layout for surface mount leadform**

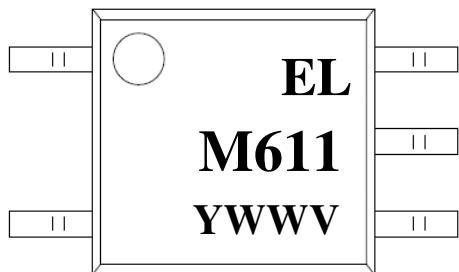**Device Marking****Notes**

- M611      denotes Device Number  
Y            denotes 1 digit Year code  
WW          denotes 2 digit Week code  
V            denotes VDE (optional)



### Tape & Reel Packing Specifications

Option TA

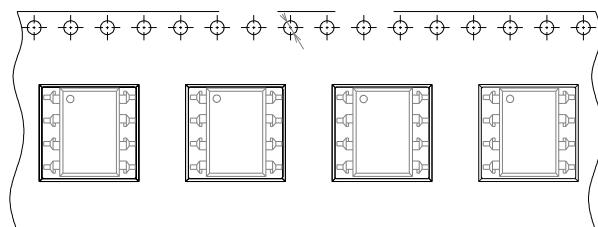


Direction of feed from reel

Option TB

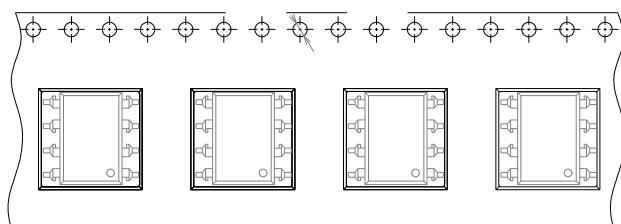


Direction of feed from reel

### Tape dimensions

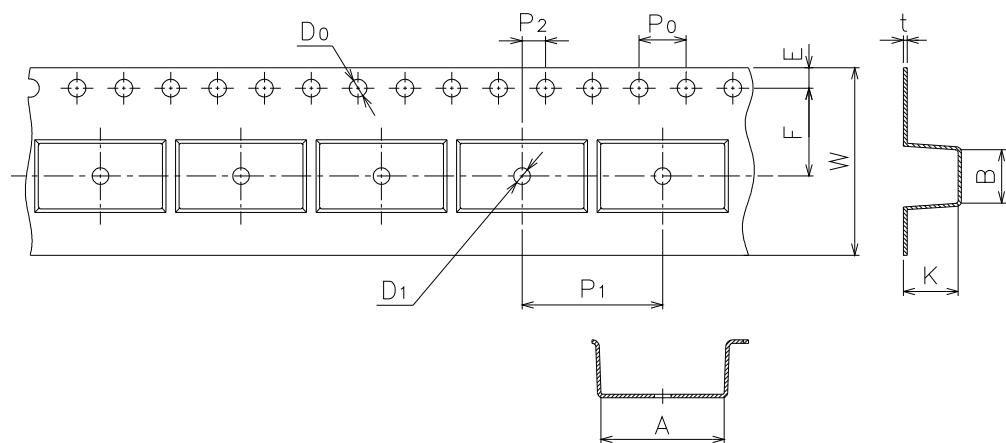

Dimension No.	<b>A</b>	<b>B</b>	<b>D<sub>0</sub></b>	<b>D<sub>1</sub></b>	<b>E</b>	<b>F</b>
Dimension(mm)	$10.4 \pm 0.1$	$10.0 \pm 0.1$	$1.5 \pm 0.1$	$1.5 \pm 0.1$	$1.75 \pm 0.1$	$7.5 \pm 0.1$
Dimension No.	<b>P<sub>o</sub></b>	<b>P<sub>1</sub></b>	<b>P<sub>2</sub></b>	<b>t</b>	<b>W</b>	<b>K</b>
Dimension(mm)	$4.0 \pm 0.1$	$12.0 \pm 0.1$	$2.0 \pm 0.1$	$0.4 \pm 0.1$	$16.0 +0.3/-0.1$	$4.5 \pm 0.1$

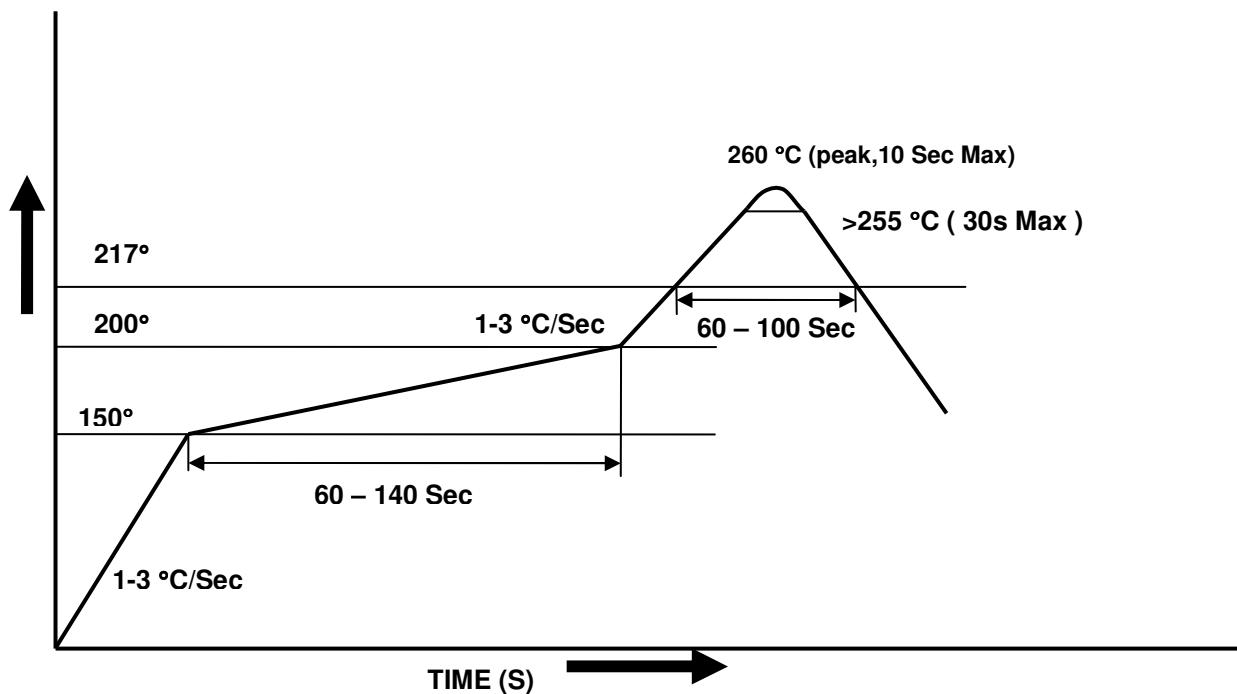**Solder Reflow Temperature Profile**

**DISCLAIMER**

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.