



**BR-329BC 2PST N.O., 60 Amps,
115 VAC, 60 Hz**

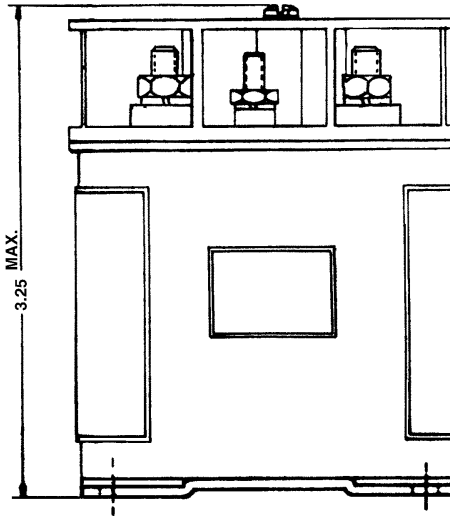


Features:

- 2PST N.O. Main Contacts
- 115 VAC Coil
- 115 VAC, 60 Hz
- 60 Amps
- High Reliability
- Meets many requirements of MIL-R-6106
- Light Weight Construction

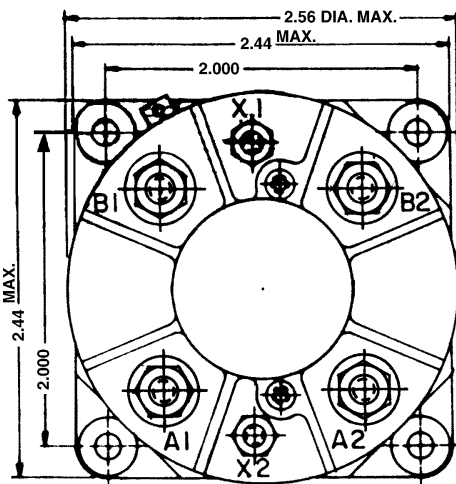

Dimensions for this product are expressed in inches. Multiply values by 25.4 for millimeters.

CONTACTOR CONFIGURATION

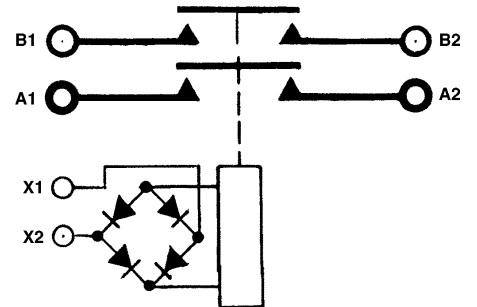

Notes:

PRODUCT SPECIFICATIONS	
Construction	Gasket Sealed, Vented
Main Contacts:	
Configuration	2PST N.O.
Voltage (Nominal)	115 VAC, 60 Hz
Current (Resistive)	60 Amps
Coil Data:	
Duty Cycle	Continuous
Voltage (Nominal)	115 VAC, 60 Hz
Pick-Up Voltage	90 VAC
Drop-Out Voltage	5 - 45 VAC
Coil Current @ 115 VAC & +25°C	0.107 Amps Maximum
Operating Temperature	-55°C to +71°C
Life:	
Electrical	50,000 Cycles
Mechanical	100,000 Cycles
Weight	1 Lb.

For factory-direct application assistance, contact the HARTMAN product team at (419) 521-9500, Fax (419) 526-2749.

© 2004 by Tyco Electronics Corporation. All Rights Reserved. HARTMAN and TYCO are trademarks.