


NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR GENERAL SERIES SPECIFICATIONS, SEE SDPRF-206.
2. MATERIAL SPECIFICATIONS:  
 BAYONET SLEEVE, BODY, CONTACT, FERRULE: BRASS PER ASTM B16  
 INSULATOR: TEFLON PER ASTM D1710  
 SPRING WASHER, OUTER CONTACT: BERYLLIUM COPPER, ASTM-B-194  
 GASKET: SILICONE RUBBER
3. FINISH SPECIFICATIONS:  
 BAYONET SLEEVE, BODY, FERRULE: .000100MIN NICKEL PER AMS-QQ-N-290  
 OVER COPPER FLASH PER ASTM B734 (ROHS)  
 CONTACT: .000030 MIN. GOLD PER ASTM B488, OVER NICKEL PER  
 AMS-QQ-N-290 (ROHS)  
 ALL OTHER METAL PARTS: .000050MIN NICKEL PER AMS-QQ-N-290  
 OVER COPPER FLASH PER ASTM B734 (ROHS)
4. CONTACT AND FERRULE SHIPPED LOOSE
5. FOR USE WITH TACHII CABLE TCX-3CFWS OR EQUIVALENT.
6. FOR CRIMPING USE KINGS TOOL KTH-5000 AND DIE KTH-5006 (.248 HEX, .054 SQUARE FLAT)
7. ASSEMBLE TO CABLE USING CAP-E01.
8. THESE AREA HAVE WHITE MARKING.
9. ELECTRICAL SPECIFICATIONS:  
 IMPEDANCE: 75 OHMS.  
 FREQUENCY RANGE: DC-3GHz.  
 RETURN LOSS: 26dB MIN AT DC-3GHz.

REV	DESCRIPTION	BY DATE	APPD
C	REVISED PER ECR-ER18920	1/11/09 CY	CIC

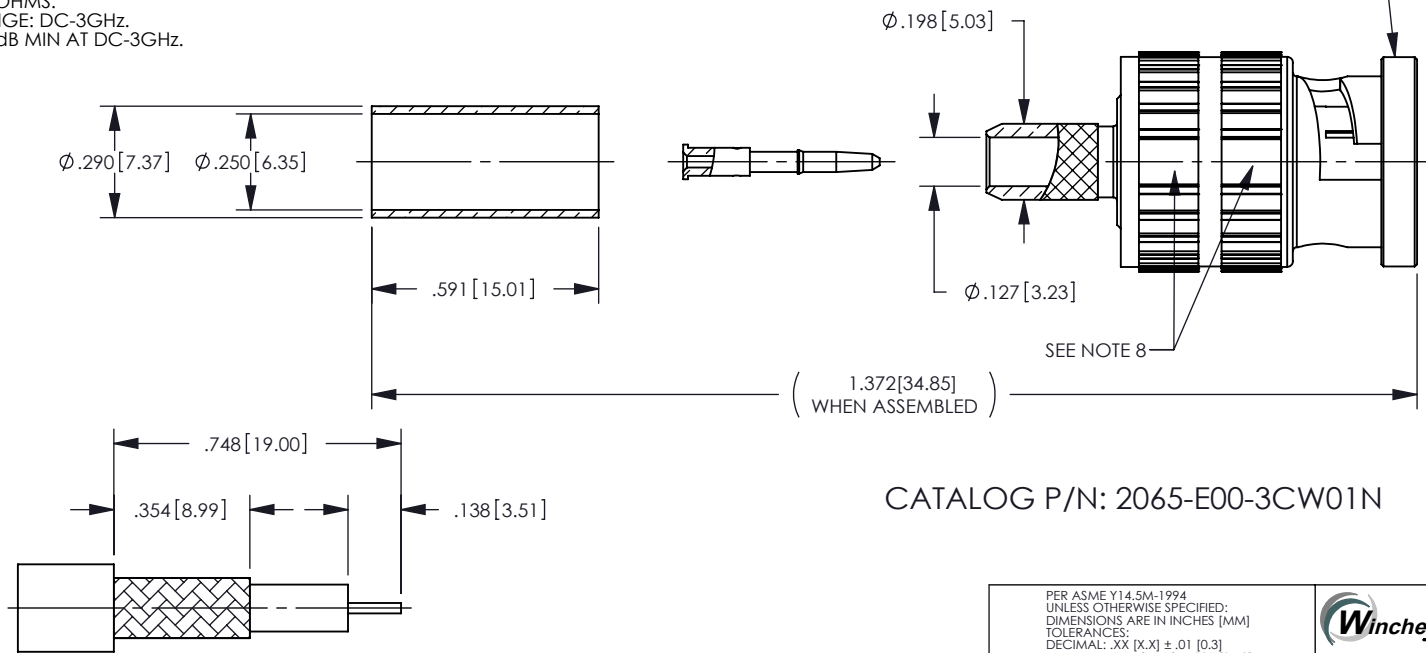

CATALOG P/N: 2065-E00-3CW01N

RECOMMENDED CABLE TRIM DIMENSIONS

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .XXXX ANGLES: ± 2° SCALE: 2:1				Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492	
CUSTOMER DRAWING					
DRAWN	DATE	APPROVED	DATE	BNC 75 OHM PLUG FOR TACHII TCX-3CFWS CABLE (ROHS COMPLIANT)	
KEV	03/20/08	RFA	03/21/08		
APPROVED	DATE	APPROVED	DATE	A SD2065-E00-3CW01 SHT 1 OF 1 REV C	
DCam	03/21/08	WPM	03/21/08		