


# EMK22H2J-62.500M



**ECLIPTEK**  
CORPORATION

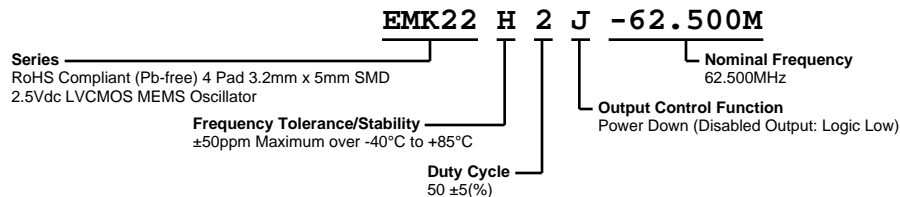

## ELECTRICAL SPECIFICATIONS


|                                 |  |
|---------------------------------|--|
| Nominal Frequency               | 62.500MHz  |
| Frequency Tolerance/Stability   | ±50ppm Maximum over -40°C to +85°C (Inclusive of all conditions: Calibration Tolerance at 25°C, Frequency Stability over the Operating Temperature Range, Supply Voltage Change, Output Load Change, First Year Aging at 25°C, 260°C Reflow, Shock, and Vibration) |
| Aging at 25°C                   | ±1ppm Maximum First Year   |
| Operating Temperature Range     | -40°C to +85°C   |
| Supply Voltage                  | 2.5Vdc ±5%   |
| Input Current                   | 20mA Maximum   |
| Output Voltage Logic High (Voh) | 90% of Vdd Minimum (IOH=-8mA)  |
| Output Voltage Logic Low (Vol)  | 10% of Vdd Maximum (IOL=+8mA)  |
| Rise/Fall Time                  | 2nSec Maximum (Measured from 20% to 80% of waveform)   |
| Duty Cycle                      | 50 ±5(%) (Measured at 50% of waveform)   |
| Load Drive Capability           | 15pF Maximum   |
| Output Logic Type               | CMOS   |
| Output Control Function         | Power Down (Disabled Output: Logic Low)  |
| Output Control Input Voltage    | +0.7Vdd Minimum or No Connect to Enable Output, +0.3Vdd Maximum to Disable Output  |
| Standby Current                 | 50µA Maximum (Disabled Output: Logic Low)  |
| Peak to Peak Jitter (tPK)       | 250pSec Maximum, 100pSec Typical   |
| Start Up Time                   | 50mSec Maximum   |
| Storage Temperature Range       | -55°C to +125°C  |

## ENVIRONMENTAL & MECHANICAL SPECIFICATIONS

|                              |   |
|------------------------------|---|
| ESD Susceptibility           | MIL-STD-883, Method 3015, Class 2, HBM 2000V              |
| Flammability                 | UL94-V0   |
| Mechanical Shock             | MIL-STD-883, Method 2002, Condition G, 30,000G            |
| Moisture Resistance          | MIL-STD-883, Method 1004                                  |
| Moisture Sensitivity Level   | J-STD-020, MSL 1  |
| Resistance to Soldering Heat | MIL-STD-202, Method 210, Condition K                      |
| Resistance to Solvents       | MIL-STD-202, Method 215                                   |
| Solderability                | MIL-STD-883, Method 2003 (Pads on bottom of package only) |
| Temperature Cycling          | MIL-STD-883, Method 1010, Condition B                     |
| Thermal Shock                | MIL-STD-883, Method 1011, Condition B                     |
| Vibration                    | MIL-STD-883, Method 2007, Condition A, 20G                |

# EMK22H2J-62.500M

## MECHANICAL DIMENSIONS (all dimensions in millimeters)

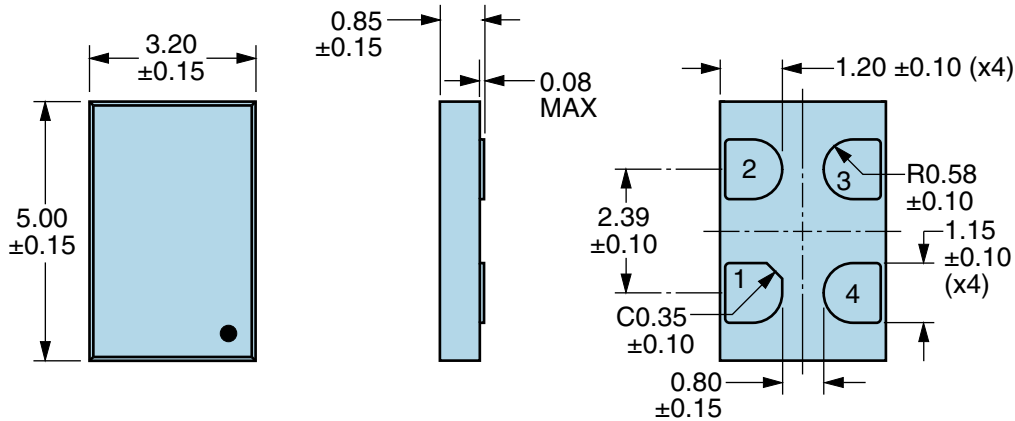


| PIN | CONNECTION     |
|-----|----------------|
| 1   | Power Down     |
| 2   | Ground         |
| 3   | Output         |
| 4   | Supply Voltage |

| LINE | MARKING   |
|------|---|
| 1    | XXXX or XXXXX<br>XXXX or XXXXX=Ecliptek<br>Manufacturing Lot Code |

## Suggested Solder Pad Layout

All Dimensions in Millimeters

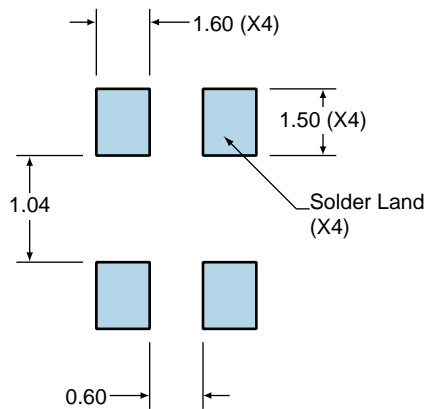

All Tolerances are  $\pm 0.1$

# EMK22H2J-62.500M

## OUTPUT WAVEFORM & TIMING DIAGRAM



### Test Circuit for CMOS Output



Note 1: An external 0.1μF low frequency tantalum bypass capacitor in parallel with a 0.01μF high frequency ceramic bypass capacitor close to the package ground and V<sub>DD</sub> pin is required.

Note 2: A low capacitance (<12pF), 10X attenuation factor, high impedance (>10Mohms), and high bandwidth (>300MHz) passive probe is recommended.

Note 3: Capacitance value C<sub>L</sub> includes sum of all probe and fixture capacitance.

## Recommended Solder Reflow Methods



### High Temperature Infrared/Convection

|  |                                      |
|--|--------------------------------------|
| <b><math>T_s \text{ MAX}</math> to <math>T_L</math> (Ramp-up Rate)</b> | 3°C/second Maximum                   |
| <b>Preheat</b>   |                                      |
| - Temperature Minimum ( $T_s \text{ MIN}$ )                            | 150°C                                |
| - Temperature Typical ( $T_s \text{ TYP}$ )                            | 175°C                                |
| - Temperature Maximum ( $T_s \text{ MAX}$ )                            | 200°C                                |
| - Time ( $t_s \text{ MIN}$ )   | 60 - 180 Seconds                     |
| <b>Ramp-up Rate (<math>T_L</math> to <math>T_p</math>)</b>             | 3°C/second Maximum                   |
| <b>Time Maintained Above:</b>  |                                      |
| - Temperature ( $T_L$ )  | 217°C                                |
| - Time ( $t_L$ )   | 60 - 150 Seconds                     |
| <b>Peak Temperature (<math>T_p</math>)</b>                             | 260°C Maximum for 10 Seconds Maximum |
| <b>Target Peak Temperature (<math>T_p \text{ Target}</math>)</b>       | 250°C +0/-5°C                        |
| <b>Time within 5°C of actual peak (<math>t_p</math>)</b>               | 20 - 40 seconds                      |
| <b>Ramp-down Rate</b>  | 6°C/second Maximum                   |
| <b>Time 25°C to Peak Temperature (t)</b>                               | 8 minutes Maximum                    |
| <b>Moisture Sensitivity Level</b>                                      | Level 1                              |

# EMK22H2J-62.500M

## Recommended Solder Reflow Methods



### Low Temperature Infrared/Convection 240°C

|  |  |
|--|--|
| <b><math>T_S</math> MAX to <math>T_L</math> (Ramp-up Rate)</b> | 5°C/second Maximum                                     |
| <b>Preheat</b>   |  |
| - Temperature Minimum ( $T_S$ MIN)                             | N/A  |
| - Temperature Typical ( $T_S$ TYP)                             | 150°C  |
| - Temperature Maximum ( $T_S$ MAX)                             | N/A  |
| - Time ( $t_S$ MIN)  | 60 - 120 Seconds                                       |
| <b>Ramp-up Rate (<math>T_L</math> to <math>T_P</math>)</b>     | 5°C/second Maximum                                     |
| <b>Time Maintained Above:</b>                                  |  |
| - Temperature ( $T_L$ )  | 150°C  |
| - Time ( $t_L$ )   | 200 Seconds Maximum                                    |
| <b>Peak Temperature (<math>T_P</math>)</b>                     | 240°C Maximum  |
| <b>Target Peak Temperature (<math>T_P</math> Target)</b>       | 240°C Maximum 1 Time / 230°C Maximum 2 Times           |
| <b>Time within 5°C of actual peak (<math>t_p</math>)</b>       | 10 seconds Maximum 2 Times / 80 seconds Maximum 1 Time |
| <b>Ramp-down Rate</b>  | 5°C/second Maximum                                     |
| <b>Time 25°C to Peak Temperature (t)</b>                       | N/A  |
| <b>Moisture Sensitivity Level</b>                              | Level 1  |

### Low Temperature Manual Soldering

185°C Maximum for 10 seconds Maximum, 2 times Maximum.

### High Temperature Manual Soldering

260°C Maximum for 5 seconds Maximum, 2 times Maximum.