


| PARAMETER | | UNITS |
|---------------------------------------|-----------|------------------|
| ¹ Inductance | 85.0 Min. | μH |
| ¹ Leakage Inductance | 0.25 Max. | μH |
| ¹ Interwinding Capacitance | 12 Max. | pF |
| Primary DC Resistance | 0.30 Max. | Ω |
| Isolation (HI-POT) | 500 Min. | V _{RMS} |
| SRF (Ref.) | 20 | MHz |
| Insulation Resistance | 10k Min. | MΩ |
| Power Rating | 250 | mW |

High Frequency Data Line Filter

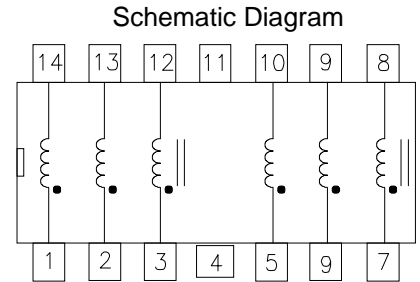


¹Tested at 100KHz and 100 mV_{RMS}
 Inductance and Impedance specifications are -40°C TO +85°C

Turns ratio 1:1 + 5%

Current Rating: 100mA

Physical Dimensions in inches (mm)

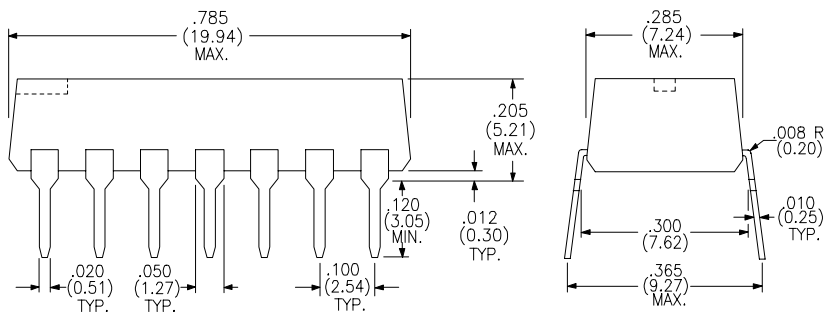

P/N F-127

3/2/97