


# SMD Schottky Barrier Rectifiers



## CDBM120-G Thru CDBM1100-G

Reverse Voltage: 20 - 100 Volts  
 Forward Current: 1.0 Amp  
 RoHS Device




### Features

- Ideal for surface mount applications
- Easy pick and place
- Plastic package has Underwriters Lab. flammability classification 94V-0
- Exceeds environmental standard MIL-S-19500/228
- Low leakage current

### Mechanical data

- Case: Mini SMA/SOD-123 molded plastic
- Terminals: solderable per MIL-STD-750, method 2026
- Polarity: Color band denotes cathode end
- Approx. Weight: 0.04 gram

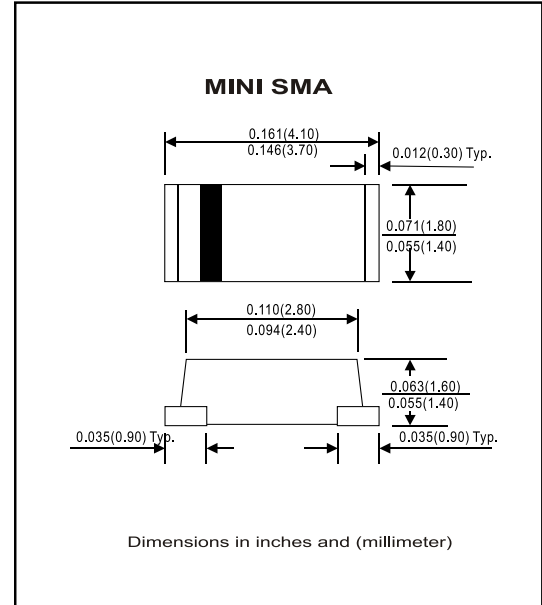

### Maximum Ratings and Electrical Characteristics

Parameter	Symbol	CDBM120-G	CDBM140-G	CDBM160-G	CDBM180-G	CDBM1100-G	Unit
Max. Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	20	40	60	80	100	V
Max. DC Blocking Voltage	V <sub>DC</sub>	20	40	60	80	100	V
Max. RMS Voltage	V <sub>RMS</sub>	14	28	42	56	70	V
Peak Surge Forward Current 8.3ms single half sine-wave superimposed on rate load (JEDEC method)	I <sub>FSM</sub>	30					A
Max. Average Forward Current	I <sub>o</sub>	1.0					A
Max. Instantaneous Forward Current at 1.0 A	V <sub>F</sub>	0.50		0.70		0.85	V
Max. DC Reverse Current at Rated DC Blocking Voltage Ta=25°C	I <sub>R</sub>	0.5					mA
Ta=100°C		10					
Max. Thermal Resistance (Note 1)	R <sub>θJA</sub> R <sub>θJL</sub>	98 20					°C/W
MAX. Operating Junction Temperature	T <sub>j</sub>	125			150		°C
Storage Temperature	T <sub>STG</sub>	-55 to +150					°C

Note 1: Thermal resistance from junction to ambient and junction to lead mounted on PCB with 0.2 x 0.2 inch<sup>2</sup> copper pad areas

## Rating and Characteristic Curves (CDBM120-G Thru CDBM1100-G)

Fig. 1 - Reverse Characteristics

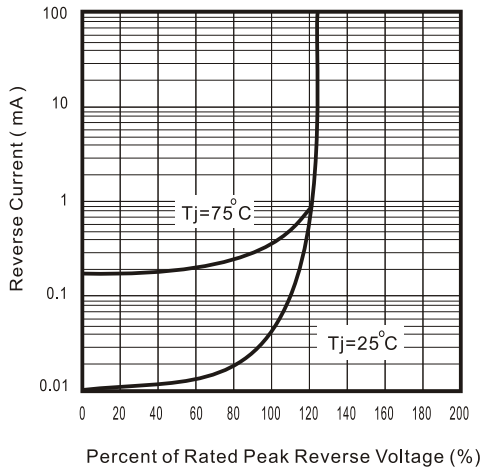


Fig.2 - Forward Characteristics

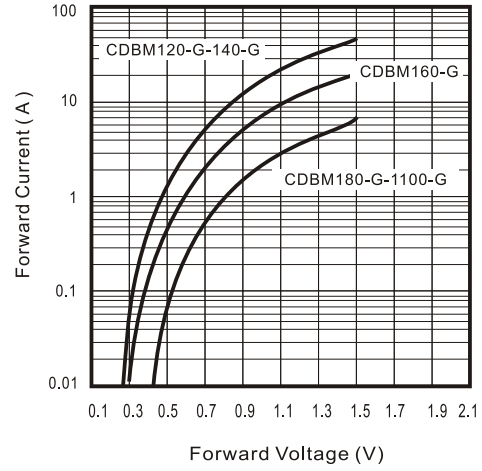


Fig. 3 - Junction Capacitance

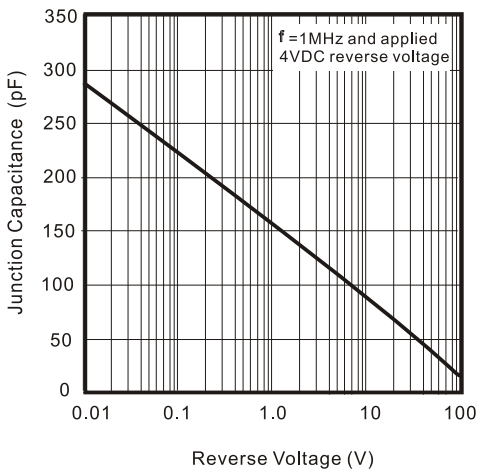


Fig. 4 - Current Derating Curve

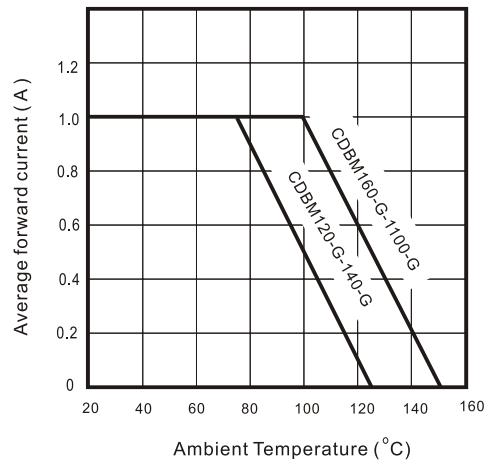


Fig. 5 - Non repetitive Forward Surge Current

