



Frontier Electronics Corp.

667 E. COCHRAN STREET, SIMI VALLEY, CA 93065

TEL: (805) 522-9998 FAX: (805) 522-9989

E-mail: frontiersales@frontierusa.com

Web: <http://www.frontierusa.com>

1A GENERAL PURPOSE PLASTIC RECTIFIER


GP10-005R THRU GP10-16R

FEATURES

- LOW FORWARD VOLTAGE
- HIGH CURRENT CAPABILITY
- LOW LEAKAGE CURRENT
- HIGH SURGE CAPABILITY
- LOW COST
- BEVEL ROUND CHIP, AVALANCHE OPERATION

MECHANICAL DATA

- CASE: DO41, MOLDED PLASTIC USE UL 94V-0 RECOGNIZED FLAME RETARDANT EPOXY, DIMENSIONS IN INCHES AND (MILLIMETERS)
- TERMINALS: AXIAL LEADS, SOLDERABLE PER MIL-STD-202, METHOD 208
- POLARITY: COLOR BAND DENOTES CATHODE
- WEIGHT: 0.34 GRAMS

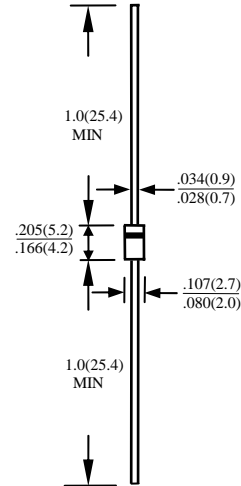

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED SINGLE PHASE, HALF WAVE, 60 HZ, RESISTIVE OR INDUCTIVE LOAD. FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%

RATINGS	SYMBOL	GP10-005R	GP10-01R	GP10-02R	GP10-04R	GP10-06R	GP10-08R	GP10-10R	GP10-13R	GP10-15R	GP10-16R	UNITS
MAXIMUM RECURRENT PEAK REVERSE VOLTAGE	V_{RRM}	50	100	200	400	600	800	1000	1300	1500	1600	V
MAXIMUM RMS VOLTAGE	V_{RMS}	35	70	140	280	420	560	700	910	1050	1120	V
MAXIMUM DC BLOCKING VOLTAGE	V_{DC}	50	100	200	400	600	800	1000	1300	1500	1600	V
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT 0.375"(9.5mm) LEAD LENGTH AT $T_A=55^\circ\text{C}$	I_O	1.0										A
PEAK FORWARD SURGE CURRENT, 8.3ms SINGLE HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	I_{FSM}	50										A
TYPICAL THERMAL RESISTANCE (NOTE 2)	$R_{\theta ja}$	50										°C/W
TYPICAL JUNCTION CAPACITANCE (NOTE 1)	C_j	15										PF
STORAGE TEMPERATURE RANGE	T_{STG}	- 55 TO + 175										°C
OPERATING TEMPERATURE RANGE	T_{OP}	- 55 TO + 175										°C

ELECTRICAL CHARACTERISTICS ($A_T T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

CHARACTERISTICS	SYMBOL	GP10-005R	GP10-01R	GP10-02R	GP10-04R	GP10-06R	GP10-08R	GP10-10R	GP10-13R	GP10-15R	GP10-16R	UNITS
MAXIMUM FORWARD VOLTAGE AT I_O DC	V_F	1.1										V
MAXIMUM REVERSE CURRENT AT 25°C	I_R	5										μA
MAXIMUM REVERSE CURRENT AT 100°C	I_R	50										μA

- NOTE:
1. MEASURED AT 1MHZ AND APPLIED REVERSE VOLTAGE OF 4.0 VOLTS
 2. BOTH LEADS ATTACHED TO HEAT SINK 20×20×1(mm) COPPER PLATE AT LEAD LENGTH 5mm

RATINGS AND CHARACTERISTIC CURVE GP10-005R THRU GP10-16R

Fig. 1-MAXIMUM CURRENT RATING
EFFECT OF COPPER AREA.
RESISTIVE/INDUCTIVE

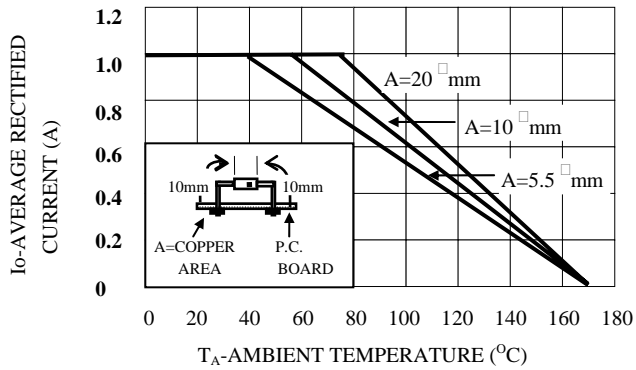


Fig. 2-MAXIMUM CURRENT RATING
CAPACITIVE LOAD, 10 mm LEAD LENGTHS

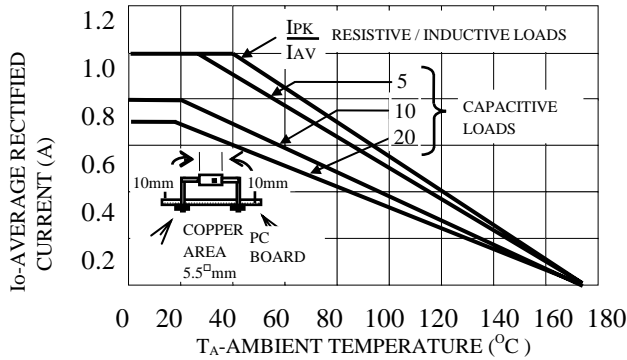


Fig. 3 MAXIMUM CURRENT RATING
EFFECT OF LEAD LENGTHS
RESISTIVE / INDUCTIVE LOAD

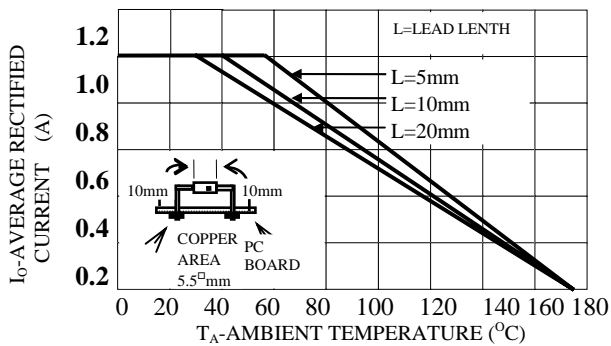


Fig. 5-MAXIMUM FORWARD SURGE
VS NUMBER OF CYCLES

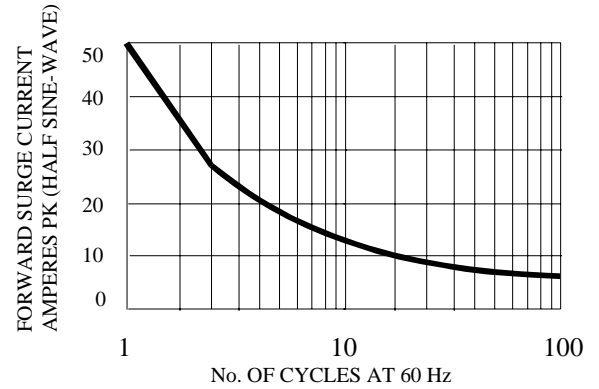


Fig. 6-TYPICAL REVERSE
CHARACTERISTIC


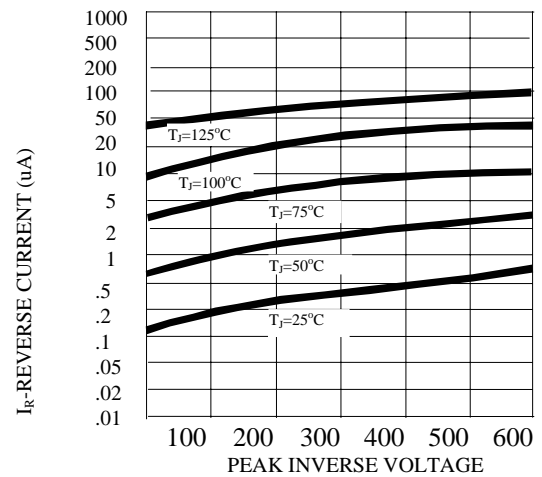


Fig. 7-TYPICAL JUNCTION CAPACITANCE



RATINGS AND CHARACTERISTIC CURVE GP10-005R THRU GP10-16R

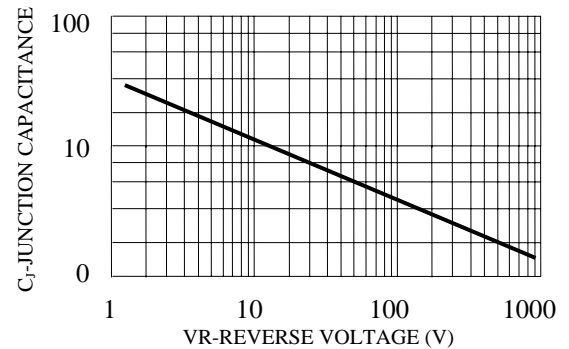