



- Ideal for European 433.92MHz transmitters
- Low loss, High Q factor
- Quartz stability
- To—39 case

UE433A
433.92MHz SAW Resonator

The UE433.92 is a true one-port ,surface-acoustic-wave(SAW) resonator in a low profile TO-39 case .It provides reliable, fundamental-mode, quartz frequency stabilization of fixed-frequency transmitters operating at 433.92MHz. The UE433.92 is designed specifically for remote-control and wireless security transmitters operating in Europe under ETSII-ETS 300 200 and in Germany under FTZ 17 TR 2100

Absolute Maximum Rating

Rating	Value
CW RF power Dissipation	+13dBm
DC Voltage between any 2 pins	± 30VDC
Case Temperature	-40 to +85°C

Electrical Characteristic

Characteristic		Sym	Unit	Minimum	Typical	Maximum
Center Frequency		F ₀	MHz	433.845	433.92	433.995
Insertion Loss		IL	dB		1.5	2.0
Quality Factor	Unloaded Q	Q _U			11,000	
	50 Ω loaded Q	Q _L			2,000	
Temperature Stability	Turnover Temperature	T ₀	°C	28	43	58
	Turnover Frequency	F ₀	KHz		F ₀ +2.7	
	Freq.Temp.Coefficient	FTC	ppm/°C ²		0.032	
Frequency Aging				ppm/yr	<± 10	
DC Insulation Resistance between any 2 pins				M Ω	1.0	
RF Equivalent RLC Model	Motional resistance	R _m	Ω		15	19
	Motional Inductance	L _m	μ H		67.0144	
	Motional Capacitance	C _m	fF		2.01212	
	Shunt Static Cap	C ₀	pF	1.7	2.1	2.3
	Transducer Static Cap.	C _p	pF		1.8	

NOTE:

1. Test temperature: 25±2°C.
2. In test the shunt inductance is tuned for parallel resonance with C₀ at f_c.
3. This part is Electrostatic Discharge Sensitive and may be damaged by improper handing




- Ideal for European 433.92MHz transmitters
- Low loss, High Q factor
- Quartz stability
- To—39 case

UE433.92
433.92MHz SAW Resonator

Package

Metal package TO39

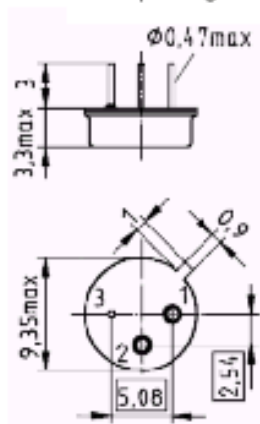

Pin configuration

- 1 Input 1
- 2 Input 2
- 3 Ground

Dimensions in mm, approx. weight 1.0 g

Frequency response

