

**LOW CAPACITANCE TRANSZORB**  
*Transient Voltage Suppressors*

**FEATURES**

- \* Plastic package has underwriters laboratory
- \* Glass passivated chip construction
- \* 500 watts peak pulse power capability with a 10/1000us waveform, repetition rate (duty cycle):0.01%
- \* Excellent clamping capability
- \* Low incremental surge resistance
- \* Very fast response time
- \* Ideal for data line applications
- \* High temperature soldering guaranteed:  
265 °C /10 seconds, 0.375"(9.5mm) lead length,  
5lbs.(2.3kg) tension

**MECHANICAL DATA**


- \* Case: JEDEC DO-204AC molded plastic body over passivated junction
- \* Terminals: Solder plated axial leads, solderable per MIL-STD-750, Method 2026
- \* Polarity: Color band denotes TVS cathode
- \* Mounting position: Any
- \* Weight: 0.098 grams

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**


Ratings at 25 °C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.



**DO-214AA**

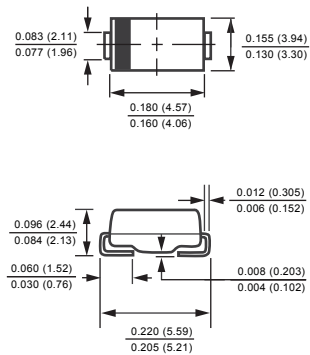

**Schematic**




**MAXIMUM RATINGS AND THERMAL CHARACTERISTICS** (@ TA=25 °C unless otherwise noted)

RATINGS	SYMBOL	BSAC5.0	UNITS
Peak Pulse Power Dissipation With a 10/1000uS Waveform (Note 1)	P <sub>PPM</sub>	Min. 500	Watts
Steady State Power Dissipation at T <sub>L</sub> =75°C Lead Lengths .375" (9.5mm) (Note 2)	P <sub>M(AV)</sub>	5.0	Watts
Peak Pulse Forward Surge Current With a 10/1000uS Waveform (Fig.3)	I <sub>FSM</sub>	100	Amps
Operating Temperature Range	T <sub>J</sub>	150	°C
Storage Temperature Range	T <sub>STG</sub>	-55 to + 150	°C


NOTES : 1. Non-repetitive current pulse, per Fig.3 and derated above T<sub>A</sub> =25°C per Fig.2  
2. "Fully ROHS compliant", "100% Sn plating (Pb-free)".

# RATING AND CHARACTERISTIC CURVES ( BSAC5.0 )


**Fig. 1 – Peak Pulse Power Rating Curve**

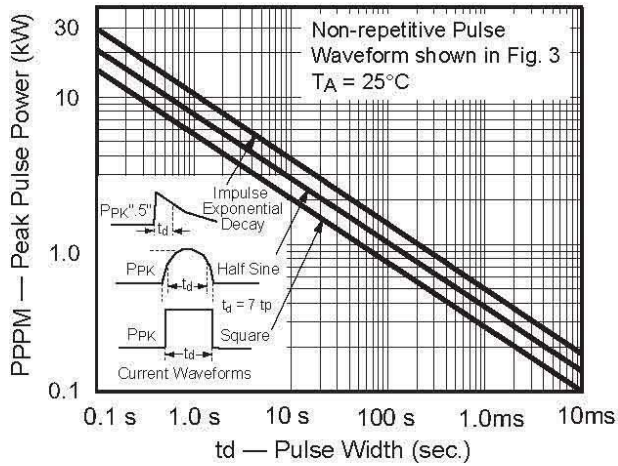


**Fig. 2 - Power Derating Curve**

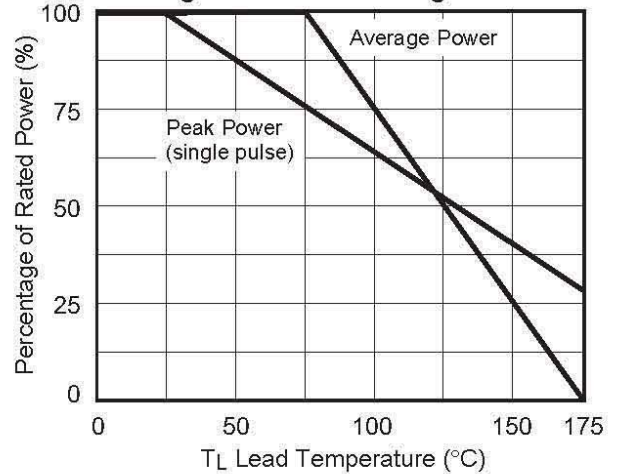

**Fig. 3 – Pulse Waveform**

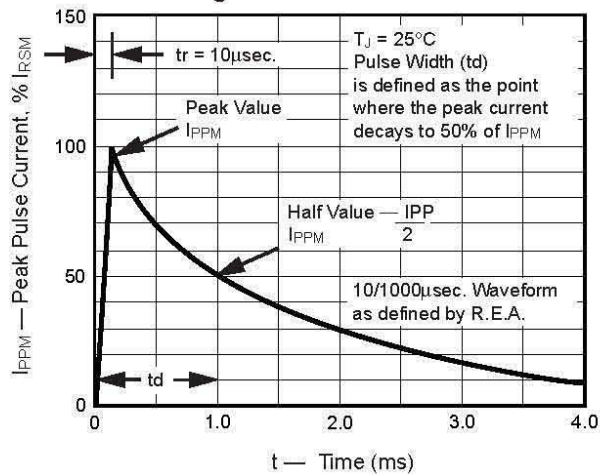

**Fig. 4 - AC Line Protection Application**

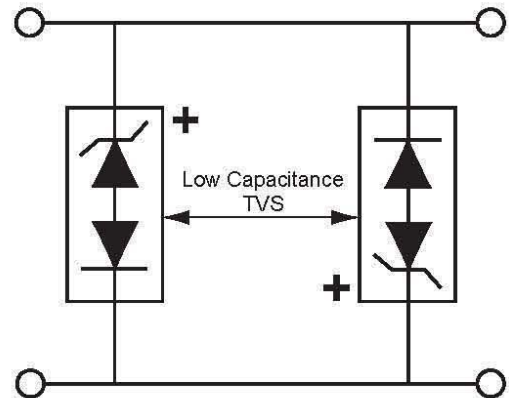


**Application Note:** Device must be used with two units in parallel, opposite in polarity as shown in circuit for AC signal line protection.

## ELECTRICAL CHARACTERISTICS

Rectron House No.	Reverse Stand off Voltage VWM * (Volts)	Minimum Breakdown voltage at $I_T=1.0mA$ V(BR) (V)	Maximum Reverse Leakage at VWM ID (uA)	Maximum Clamping Voltage at IPPM=5.0A VC (Volts)	Maximum Peak Pulse Current IPPM (Amps)	Maximum Junction Capacitance at 0 Volts (PF)	Working Inverse Blocking Voltage VWB (V)	Inverse Blocking Leakage Current VWB IIB(mA)	Peak Inverse Blocking Voltage VPIB (V)
BSAC5.0	5.0	7.60	300	10.0	44	50	75	1.0	100

\* Non -repetitive current pulse,per Fig.3 and derated above TA=25 degree per Fig.2

## Mounting Pad Layout

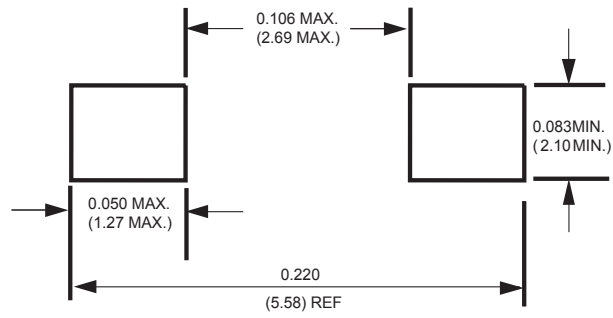

Dimensions in inches and (millimeters)

## DISCLAIMER NOTICE

Rectron Inc reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. Rectron Inc or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on RECTRON data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. Rectron Inc does not assume any liability arising out of the application or use of any product or circuit.

Rectron products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of Rectron Inc. Customers using or selling Rectron components for use in such applications do so at their own risk and shall agree to fully indemnify Rectron Inc and its subsidiaries harmless against all claims, damages and expenditures.