



## SPECIFICATIONS

PRODUCT : VARISTOR

TYPE : GNR53D□□□K

MODEL : N

CITATION :

REVISION : B01


TOTAL PAGES : 5 PAGE : 1/5

RELEASED DATE : Feb. 06, 2002

### REVISION HISTORY

NO	REV. DATE	DCR NO.	DESCRIPTION OF CHANGE	REV.
1	Feb. 06,2002		NEW RELEASE	B01
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				

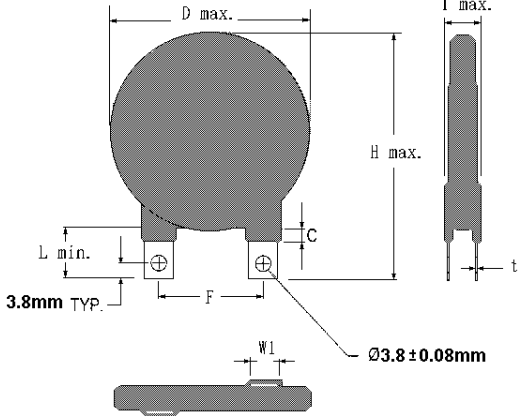
Approved by	Checked by	Edited by
Yu-Chang Huang	Cloud Chen	Andy Chiang

	TYPE	GNR53D□□□K	MODEL	錯誤! 連結無效。	PAGE	2/5
CITATION	錯誤! 連結無效。			DATE	錯誤! 連結無效。	
SUBJECT	QUALITY APPROVAL and STRUCTURE			REV.	錯誤! 連結無效。	


### 1. QUALITY SYSTEM APPROVAL

ISO9001 Certificate of approval No.97-HOU-AQ-1382

### 2. STRUCTURE

NO.	ITEM	DESCRIPTION		
2.1	Main Material	Zinc Oxide		
2.2	Coating Material	Epoxy Resin		
2.3	Marking	GNR, Part number		
2.4	Appearance	Without dirt and crack, marking should be clear		
2.5	Dimensions	 <p style="text-align: right;">Unit: mm</p>		
			D(max.)	65.0
			H(max.)	78.2
			T(max.)	<b>* (1)</b>
			F	25.4± 0.5
			T	0.5± 0.1
			L(min.)	16.5
			C(max.)	3.18
			W1(max.)	7.0


\* (1) See Page 3, Dimensions Table

	TYPE	GNR53D□□□K	MODEL	錯誤! 連結無效。	PAGE	3/5
CITATION	錯誤! 連結無效。			DATE	錯誤! 連結無效。	

SUBJECT	<b>DIMENSIONS TABLE</b>	REV.	錯誤! 連結無效。
---------	-------------------------	------	-----------

Part No.	T <sub>max.</sub>
53D201K	6.3
53D241K	6.5
53D271K	6.7
53D331K	7.0
53D361K	7.2
53D391K	7.4
53D431K	7.6
53D471K	7.9
53D511K	8.1
53D621K	8.8
53D681K	9.1
53D751K	9.5
53D781K	9.7
53D821K	9.9
53D911K	10.5
53D951K	10.9
53D102K	11.3
53D112K	11.9

Unit:mm

	TYPE	GNR53D□□□K	MODEL	錯誤! 連結無效。	PAGE	4/5
CITATION	錯誤! 連結無效。			DATE	錯誤! 連結無效。	

SUBJECT	<b>ELECTRICAL CHARACTERISTICS</b>	REV.	錯誤! 連結無效。
---------	-----------------------------------	------	-----------

### 3. ELECTRICAL CHARACTERISTICS

NO.	ITEM	PERFORMANCE	TEST METHODS
3.0	Standard Conditions		Unless otherwise specified, all tests are made under environmental conditions as given below: Temperature: 5~35°C Relative humidity: 45~85 % RH
3.1	Maximum Allowable Voltage	AC : <b>* (2)</b> V <sub>rms</sub> DC : <b>* (2)</b> V	Maximum continuous sine wave(RMS) or DC voltage which may be applied.
3.2	Varistor Voltage	V <sub>1mA</sub> : <b>* (2)</b> V	Voltage across the varistor measured at C <sub>mA</sub> DC.
3.3	Varistor Voltage Temperature Coefficient	0 ~ -0.05 %/°C	$\frac{V_{CmA} \text{ at } 85^{\circ}\text{C} - V_{CmA} \text{ at } 25^{\circ}\text{C}}{V_{CmA} \text{ at } 25^{\circ}\text{C}} \times \frac{1}{60} \times 100$
3.4	Max. Clamping Voltage	<b>* (2)</b> V at <b>* (2)</b> A	Peak voltage across the varistor with a specified peak impulse current of 8x 20 μs waveform.
3.5	Withstanding Surge Current	<b>* (2)</b> A	The max. current within the varistor voltage change of less than ± 10% when one impulse current (8x 20 μs) applied.
			The max. current with a varistor voltage change of less than ± 10% when two times impulse current (8x 20 μs) are applied at intervals of 5 minutes.
3.6	Energy	<b>* (2)</b> Joule	The max. energy absorbed with a varistor voltage change of less than ± 10% when one impulse(10 x 1000 μs) is applied.
3.7	Surge Life	<b>* (2)</b> A	The max. current with a varistor voltage change of less than ± 10% when 10,000 times impulse current (8x 20 μs) are applied at intervals of 20 seconds at room temperature.

\* (2) See Page 5

CITATION

錯誤! 連結無效。

DATE

錯誤! 連結無效。

SUBJECT

**ELECTRICAL CHARACTERISTICS**

REV.

錯誤! 連結無效。

PART NUMBER	MAXIMUM ALLOWABLE VOLTAGE		VARISTOR VOLTAGE (V)	CLAMPING VOLTAGE (MAX.)		SURGE CURRENT (8/20 $\mu$ s)		MAXIMUM ENERGY (10/1000 $\mu$ s) $W_m$ (joule)	SURGE LIFE (A)
	AC <sub>rms</sub> (V)	DC(V)		(V)	Ip(A)	I <sub>m</sub> (A)			
			1 TIME			2 TIMES			
53D201K	130	170	185~225	340	500	70000	50000	490	800
53D241K	150	200	216~264	395				570	
53D271K	175	225	243~297	455				630	
53D331K	210	275	297~363	550				680	
53D361K	230	300	324~396	595				730	
53D391K	250	320	351~429	650				880	
53D431K	275	350	387~473	710				950	
53D471K	300	385	423~517	775				1000	
53D511K	320	415	459~561	845				1100	
53D621K	385	505	558~682	1025				1300	
53D681K	420	560	612~748	1120				1500	
53D751K	460	615	675~825	1240				1600	
53D781K	485	640	702~858	1290				1650	
53D821K	510	670	738~902	1355				1800	
53D911K	550	745	819~1001	1500				2000	
53D951K	575	765	885~1045	1570				2100	
53D102K	625	825	900~1100	1650				2200	
53D112K	680	895	990~1210	1815				2500	