




## FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,Low forward voltage drop
- High surge capability
- For use in low voltage ,high frequency inverters,  
free wheeling ,and polarity protection applications
- High temperature soldering guaranteed:260°C/10 seconds at terminals

**DO-15**

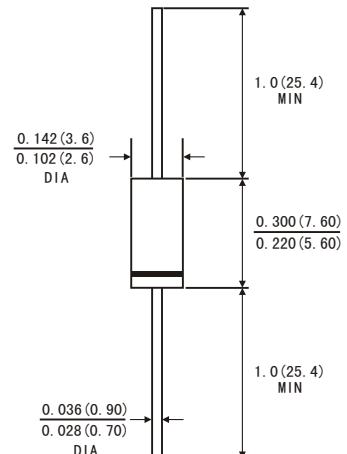

Dimensions in inches and (millimeters)

## MECHANICAL DATA

- Case: JEDEC DO-15 molded plastic body
- Terminals: Plated axial leads, solderable per MIL-STD-750, method 2026
- Polarity: color band denotes cathode end
- Mounting Position: Any
- Weight: 0.014ounce, 0.39 gram

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified ,Single phase ,half wave ,resistive or inductive load. For capacitive load, derate by 20%.)

	Symbols	SR 220	SR 230	SR 240	SR 250	SR 260	SR 280	SR 2100	SR 2150	SR 2200	Units						
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	30	40	50	60	80	100	150	200	Volts						
Maximum RMS voltage	V <sub>RMS</sub>	14	21	28	35	42	57	71	105	140	Volts						
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	50	60	80	100	150	200	Volts						
Maximum average forward rectified current 0.375"(9.5mm) lead length at T <sub>A</sub> =75°C	I <sub>(AV)</sub>	2.0								Amps							
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	50.0								Amps							
Maximum instantaneous forward voltage at 2.0 A (Note 1)	V <sub>F</sub>	0.55		0.70		0.85		0.90		0.95							
Maximum instantaneous reverse current at rated DC blocking voltage (Note 1)	I <sub>R</sub>	0.2 10								mA							
Typical junction capacitance (Note 3)	C <sub>J</sub>	170								pF							
Typical thermal resistance (Note 2)	R <sub>θJA</sub>	35.0								°C/W							
Operating junction temperature range	T <sub>J</sub>	-65 to +150								°C							
Storage temperature range	T <sub>STG</sub>	-65 to +150								°C							

Notes: 1.Pulse test: 300 μ s pulse width,1% duty cycle

2.Thermal resistance from junction to lead, and/or to ambient P.C.B. mounted with 0.375"(9.5mm) lead length with 1.5 X1.5"(38X38mm)copper pads

3.Measured at 1.0MHz and reverse voltage of 4.0 volts



星合电子  
XINGHE ELECTRONICS

# SR220 THRU SR2200

SCHOTTKY BARRIER RECTIFIER  
Reverse Voltage - 20 to 200 Volts  
Forward Current - 2.0 Amperes

FIG.1-FORWARD CURRENT DERATING CURVE

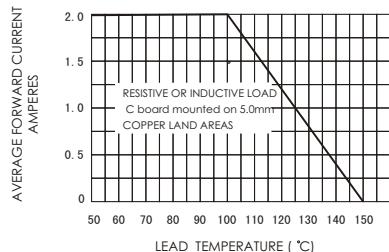


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

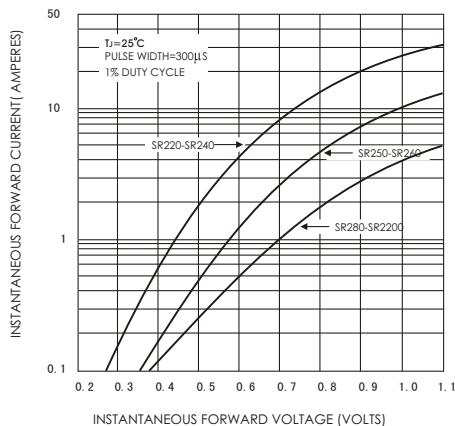


FIG.5-TYPICAL JUNCTION CAPACITANCE

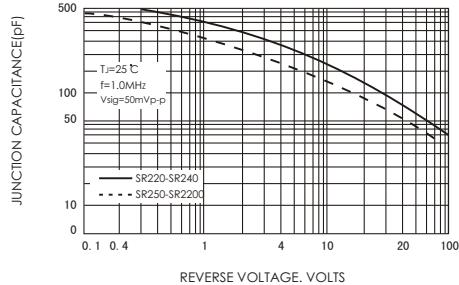


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

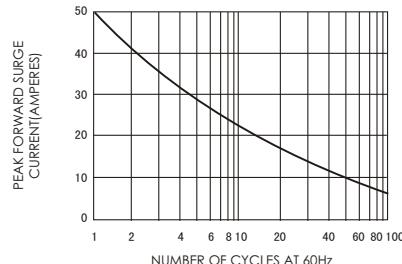


FIG.4-TYPICAL REVERSE CHARACTERISTICS

