

CONSTANT VOLTAGE REGULATION APPLICATION.
REFERENCE VOLTAGE APPLICATION.


FEATURES

- Small Package : SOT-23
- Normal Voltage Tolerance About $\pm 2.5\%$.

MAXIMUM RATING (Ta=25°C)


CHARACTERISTIC	SYMBOL	RATING	UNIT
Power Dissipation	P_D^*	300	mW
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55 ~ 150	°C

Note P_D^* : Package Mounted on 99.5% alumina $10 \times 8 \times 0.6$ mm.

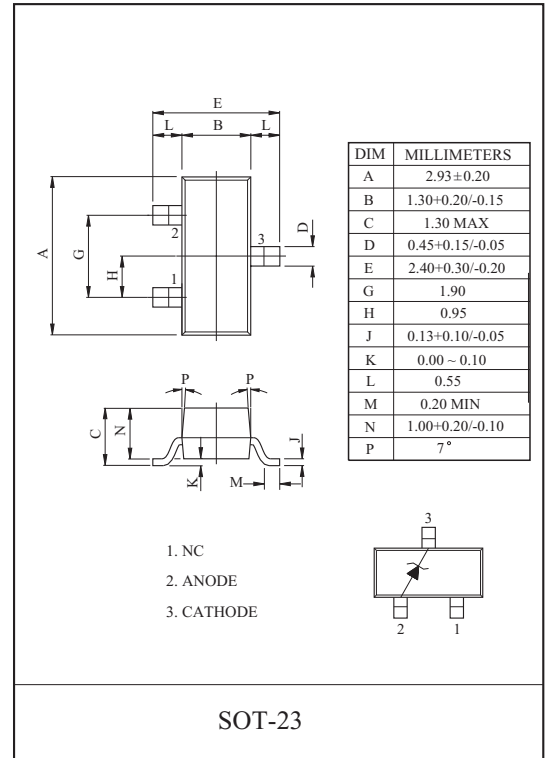


Marking

Example 1) 2.0V ~ 3.9V

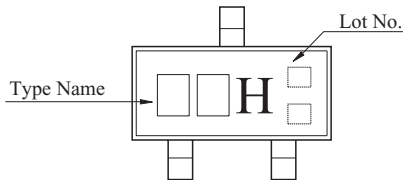


TYPE NAME : BZX84C2V0-V → 2AH
 BZX84C2V2-V → 2BH
 BZX84C2V4-V → 2CH
 BZX84C2V7-V → 2DH
 BZX84C3V0-V → 30H
 BZX84C3V3-V → 33H
 BZX84C3V6-V → 36H
 BZX84C3V9-V → 39H

Example 2) 4.3V ~ 9.1V

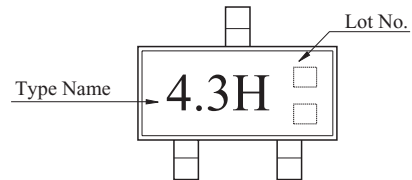


TYPE NAME : BZX84C4V3-V → 4.3H

Example 3) 10V ~ 24V

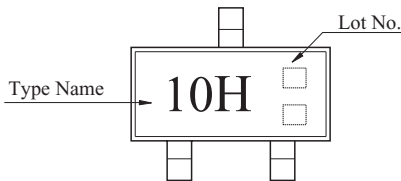

TYPE NAME : BZX84C10-V → 10H

Example 4) 27V ~ 36V

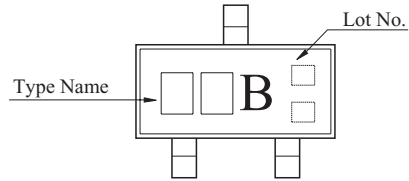

TYPE NAME : BZX84C27-V → 27B
 BZX84C30-V → 30B
 BZX84C33-V → 33B
 BZX84C36-V → 36B


BZX84C-V-Series

ELECTRICAL CHARACTERISTICS (Ta=25 °C)

TYPE No.	Zener Voltage Vz (V)			Dynamic Impedance Zz (Ω)		KNEE Dynamic Impedance Zzk (Ω)		Reverse Current I _R (μA)	
	Min.	Max.	Iz (mA)	MAX.	Iz (mA)	MAX.	Iz (mA)	MAX.	V _R (V)
BZX84C2V0-V	1.85	2.15	5	100	5	1000	0.5	120	1.0
BZX84C2V2-V	2.05	2.38	5	100	5	1000	0.5	120	1.0
BZX84C2V4-V	2.28	2.60	5	100	5	1000	0.5	120	1.0
BZX84C2V7-V	2.50	2.90	5	100	5	1000	0.5	120	1.0
BZX84C3V0-V	2.80	3.20	5	120	5	1000	0.5	50	1.0
BZX84C3V3-V	3.10	3.50	5	130	5	1000	0.5	20	1.0
BZX84C3V6-V	3.40	3.80	5	130	5	1000	0.5	10	1.0
BZX84C3V9-V	3.70	4.10	5	130	5	1000	0.5	10	1.0
BZX84C4V3-V	4.13	4.35	5	130	5	1000	0.5	5	1.0
BZX84C4V7-V	4.53	4.76	5	120	5	1000	0.5	5	1.0
BZX84C5V1-V	4.97	5.24	5	70	5	1000	0.5	1.	1.5
BZX84C5V6-V	5.43	5.81	5	40	5	900	0.5	1	2.5
BZX84C6V2-V	6.00	6.39	5	30	5	500	0.5	1	3.0
BZX84C6V8-V	6.60	7.02	5	25	5	150	0.5	0.5	5.0
BZX84C7V5-V	7.23	7.66	5	23	5	120	0.5	0.5	6.0
BZX84C8V2-V	7.96	8.43	5	20	5	120	0.5	0.5	6.5
BZX84C9V1-V	8.80	9.30	5	18	5	120	0.5	0.5	7.0
BZX84C10-V	9.73	10.26	5	15	5	120	0.5	0.5	8.0
BZX84C11-V	10.73	11.26	5	15	5	120	0.5	0.5	8.5
BZX84C12-V	11.73	12.26	5	15	5	110	0.5	0.5	9.0
BZX84C13-V	12.88	13.57	5	15	5	110.	0.5	0.5	10
BZX84C15-V	14.33	15.11	5	15	5	110.	0.5	0.5	11
BZX84C16-V	15.80	16.60	5	18	5	150	0.5	0.5	12
BZX84C18-V	17.46	18.43	5	20	5	150	0.5	0.5	14
BZX84C20-V	19.48	20.46	5	25	5	200	0.5	0.5	15
BZX84C22-V	21.48	22.56	5	30	5	200	0.5	0.5	17
BZX84C24-V	23.61	24.92	5	40	5	200	0.5	0.5	19
BZX84C27-V	26.19	27.53	2	150	2	150	0.5	0.1	21
BZX84C30-V	29.19	30.69	2	200	2	200	0.5	0.1	23
BZX84C33-V	32.15	33.79	2	250	2	250	0.5	0.1	25
BZX84C36-V	35.07	36.87	2	300	2	300	0.5	0.1	27

BZX84C-V-Series

$I_Z - V_Z$

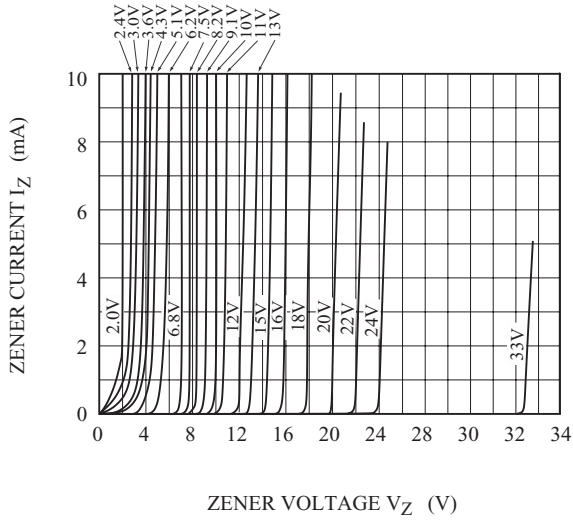

$P_d - T_a$

