

User's Guide

D0107LT-33-0701A

VFD- **RoHS Compliant**

(Vacuum Fluorescent Display)

For product support, contact

Newhaven Display International
2511 Technology Drive, #101
Elgin, IL 60124

Tel: (847) 844-8795 Fax: (847) 844-8796

February 21, 2008

Vacuum Fluorescent Display Specification

PART NUMBER: D0107LT-33-0701A

FEATURES: 7 Digits, 7-Segmented, Instrumentation, Scales



APPLICATION: Character Display (7-Segmented)

RATINGS: Below

Outer Dimensions	Panel Length	P.L.	98.0	mm	
	Panel Height	P.H.	33.0	mm	
	Panel Thickness	P.T.	8.0	mm	
Leads	Lead Pitch	L.P.	2.54	mm	
	Lead Out	-	SIL		
Character Size	Character Height	C.H.	12.4	mm	
	Character Width	C.W.	6.0	mm	
Item	Symbol	Min.	Recommended	Max.	Unit
Filament Voltage	Ef	2.9	3.3	3.6	Vac
Peak Grid Voltage	ec	-	35.0	42.0	Vp-p
Peak Anode Voltage	eb	-	35.0	42.0	Vp-p
-	-	-	-	-	-
Duty Cycle	Du	-	1/10	-	-
Pulse Width	tp	-	100	-	uS
Operating Temperature	Topr	-40	-	+ 85	C
Storage Temperature	Tstg	-50	-	+ 95	C
Color of Illumination	Green				

**Electrical
Characteristics**

Item	Symbol	Test Condition	Min.	Typical	Max.	Unit	
Filament Current	if	Ef = 3.3 Vac	97.0	108.0	119.0	mAac	
	-	eb = ec = 0	-	-	-	-	
Anode Current	ib/1G~6G	Ef = 3.3 Vac eb = 35.0 Vp-p ec = 35.0 Vp-p Du = 1/10 Tp = 100 uS	-	8.0	16.0	MAp-p	
	-		-	9.0	18.0	MAp-p	
	-		-	-	-	-	MAp-p
	-		-	-	-	-	MAp-p
	-		-	-	-	-	MAp-p
Grid Current	ic / 1G~6G		-	8.5	17.0	MAp-p	
	ic / 7G		-	9.0	18.0	MAp-p	
	-		-	-	-	-	MAp-p
	-		-	-	-	-	MAp-p
	-		-	-	-	-	MAp-p
Luminance	L(G)		430	860	-	cd/m ²	
	-		(125)	(250)	-	fL	
Luminance Ratio	Lmin/Lmax		50	-	-	%	
Grid Cut-off Voltage	Ecco	Ef = 3.3 Vac eb = 35.0 Vdc	-4.0	-	-	Vdc	
Anode Cut-off Voltage	Ebco	Ef = 3.3 Vac ec = 35.0 Vp-p Du = 1/10 Tp = 100uS	-2.0	-	-	Vdc	

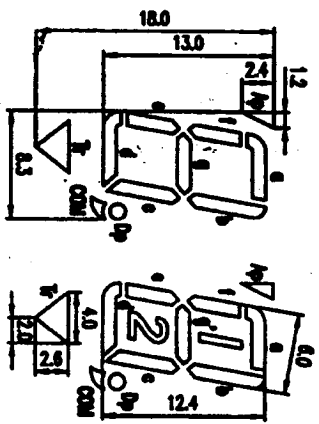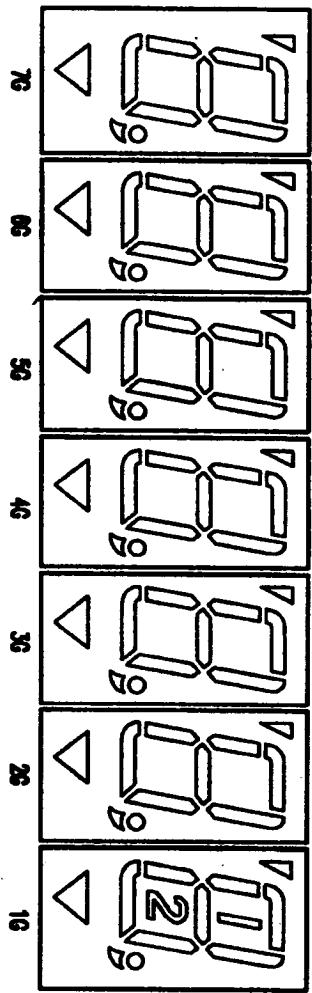

Pin No.	1	2	3	4	5	6	7	8	9	10	11
Connect	F	NP	P(Ap)	P(I)	P(g)	7G	NC	P(e)	P(d)	6G	NC
Pin No.	12	13	14	15	16	17	18	19	20	21	22
Connect	P(Tr)	NC	5G	NC	NC	NC	4G	NC	P(COM)	P(DP)	3G
Pin No.	23	24	25	26	27	28	29	30	31	32	33
Connect	NC	P(c)	P(1 2)	2G	NC	P(g)	P(b)	1G	P(d)	NP	F

NOTES:

- F: Filament
- G: Grid
- NP: No Pin
- P: Anode
- NC: No Connect