

SINGLE WINDOW SINGLE MODE WIDEBAND FIBER COUPLER (1x3)

SWFC 1x3 Series

Features

- ◆ Single Fusion Compact Package
- ◆ Ultra Low Polarization Sensitivity
- ◆ Wavelength Independent
- ◆ Highly Stable & Reliable

Applications

- ◆ CATV
- ◆ Local Area Networks
- ◆ Subscriber Loops
- ◆ Telecommunications

SINGLE WINDOW, SINGLE MODE WIDEBAND FIBER COUPLER (1X3)

Oplink's single window, single mode wideband fiber couplers are highly stable for multi-port optical signal splitting. They have very good uniformity, low excess loss and very low polarization sensitivity. All devices are tested according to industry standard test procedures and are supplied with all pertinent measurement data.

Oplink can provide customized designs to meet specialized feature applications. Also, Oplink offers modular assemblies that integrate other components to form a full function module or subsystem.



Performance Specifications

SWFC53/33 Series (1x3)	Premium	Grade A	Unit
Configuration		1x3	
Operating Wavelength	1290 ~1330 or 1528~1565 or 1570~1610		nm
Insertion Loss *	< 5.5	< 5.8	dB
Temperature Dependent Loss	< 0.15	< 0.20	dB
Uniformity	< 0.9	< 1.3	dB
Polarization Dependent Loss	< 0.10	< 0.16	dB
Directivity		> 55	dB
Maximum Power Handling		500	mW
Operating Temperature		- 10 to +70	°C
Storage Temperature		- 40 to +85	°C
Package Dimension **	P1: 250µm SMF-28 bare fiber P2: 900µm loose tube P3: 3mm cable	(Ø)3.0 x (L)60 (Ø)4.0 x (L)70 (L)96 x (W)17 x (H)6.4	mm


Values are referenced without connector loss.

* Couplers with unequal splitting ratio are also available. Please contact Oplink Sales and Marketing Department for more detailed information.

** The mechanical tolerance should be +/-0.2 mm on all package dimensions unless otherwise custom specified.

Ordering Information

Oplink can provide a remarkable range of customized optical solutions. For detail, please contact Oplink's OEM design team or account manager for your requirements and ordering information (510) 933-7200.

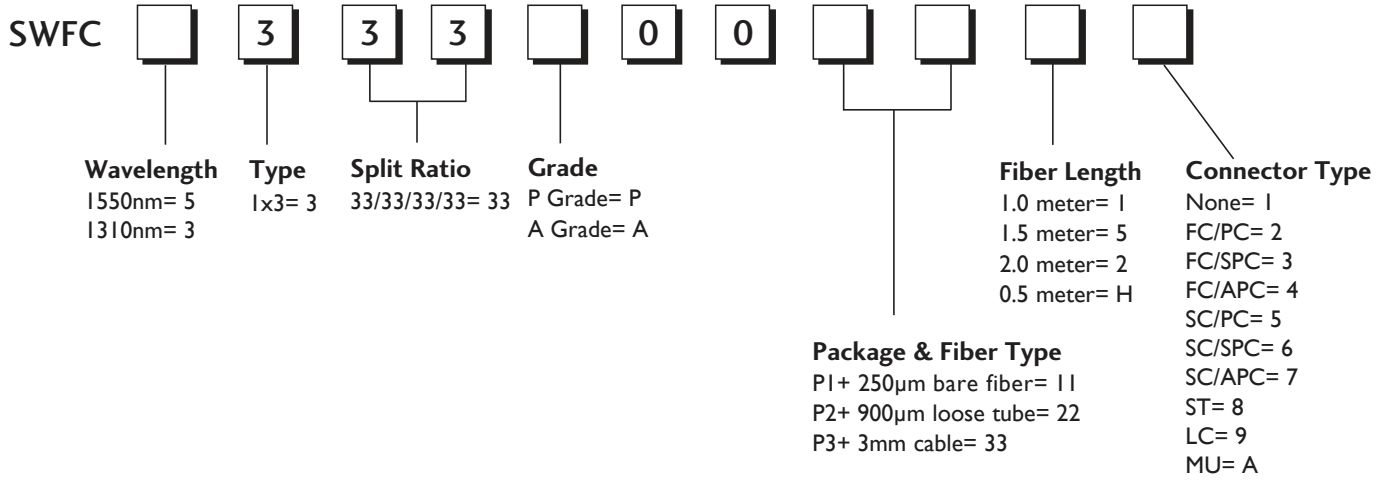

*** 1 meter is standard. The lead time for special fiber length will be longer.