


120 Amp Schottky Rectifier

HS126150

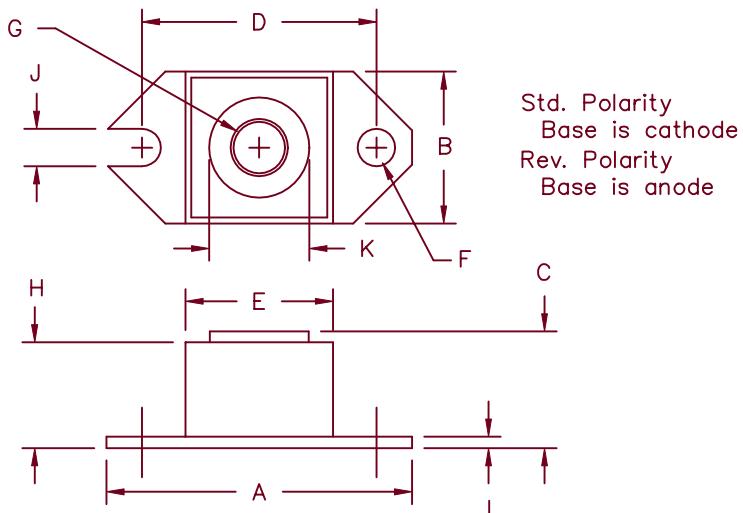

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	1.52	1.56	38.86	39.62	
B	.725	.775	18.42	19.69	
C	.605	.625	15.37	15.88	
D	1.182	1.192	30.02	30.28	
E	.745	.755	18.92	19.18	
F	.152	.160	3.86	4.06	Sq. Dia.
G			1/4-20 UNC-2B		
H	.570	.580	14.49	14.73	
J	.156	.160	3.96	4.06	
K	.495	.505	12.57	12.83	
L	.120	.130	3.05	3.30	Dia.

Microsemi Catalog Number	Industry Part Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
HS126150	129NQ150	150V	150V	150V

- Schottky Barrier Rectifier
- Low Forward Voltage Drop
- Guard ring reverse protection
150V @ 175°C

*Add Suffix R for Reverse Polarity

Electrical Characteristics

Average forward current	I _{F(AV)} 120 Amps	T _C = 137°C, Square wave, R _{θJC} = 0.40°C/W
Maximum surge current	I _{FSM} 2000 Amps	8.3ms, half sine, T _J = 175°C
Maximum repetitive reverse current	I _{R(OV)} 2 Amps	f = 1 KHZ, 25°C, 1 μsec square wave
Max peak forward voltage	V _{FM} 0.91 Volts	I _{FM} = 120A; T _J = 25°C*
Max peak reverse current	I _{RM} 10 mA	V _{RRM} , T _J = 125°C*
Max peak reverse current	I _{RM} 4.0 mA	V _{RRM} , T _J = 25°C
Typical junction capacitance	C _J 2200 pF	V _R = 5.0V, T _C = 25°C

*Pulse test: Pulse width 300 μsec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T _{STG}	-55°C to 175°C
Operating junction temp range	T _J	-55°C to 175°C
Max thermal resistance	R _{θJC}	0.40°C/W Junction to case
Typical thermal resistance (greased)	R _{θCS}	0.12°C/W Case to sink
Terminal Torque		35-40 inch pounds
Mounting Base Torque		20-25 inch pounds
Weight		1.1 ounces (32 grams) typical

HS126150

Figure 1
Typical Forward Characteristics

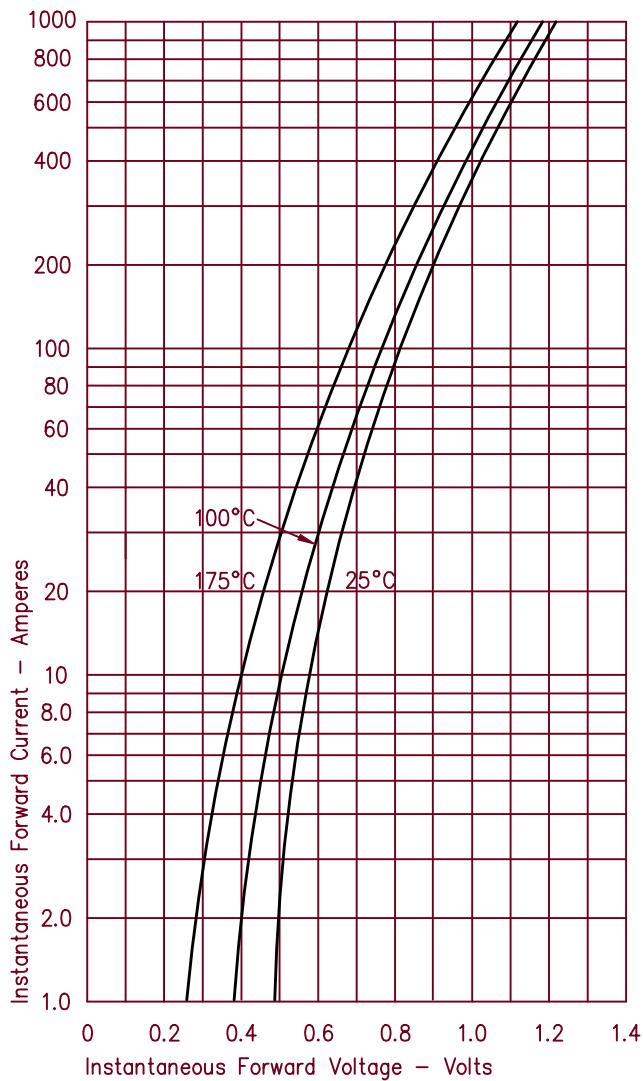


Figure 2
Typical Reverse Characteristics

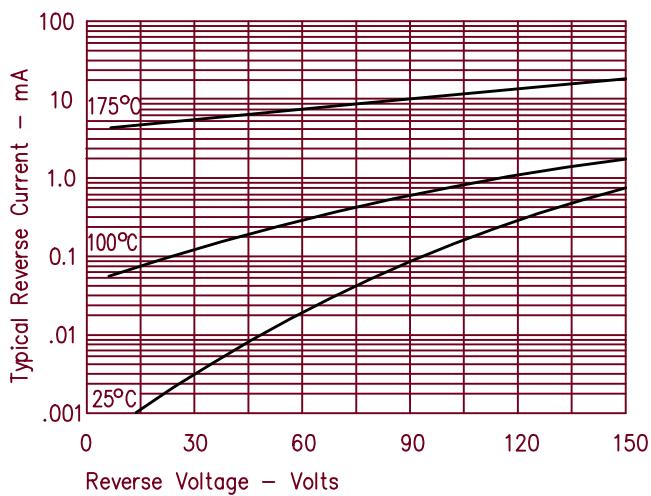


Figure 3
Typical Junction Capacitance

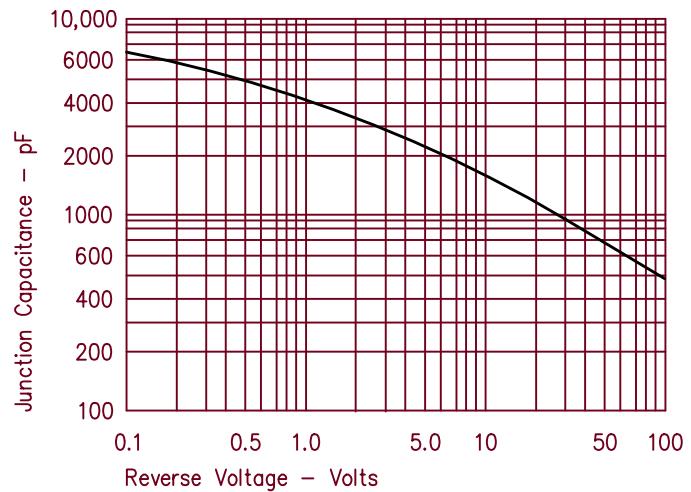


Figure 4
Forward Current Derating

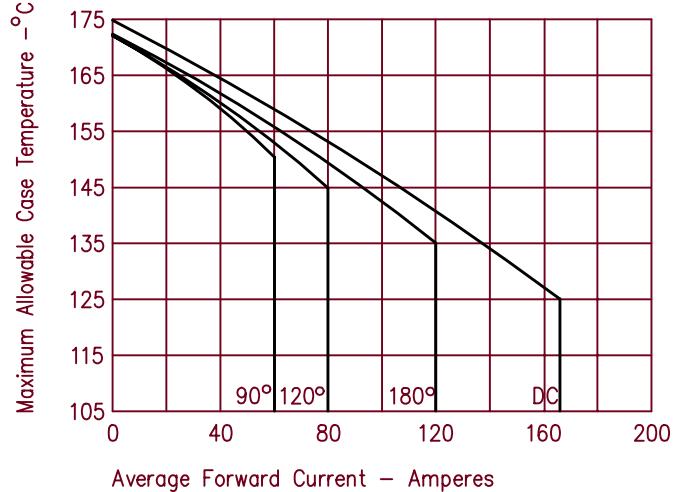


Figure 5
Maximum Forward Power Dissipation

