

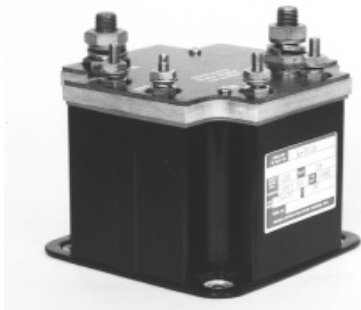


A-701P-I SPST N.O., 400 Amps, 28 VDC

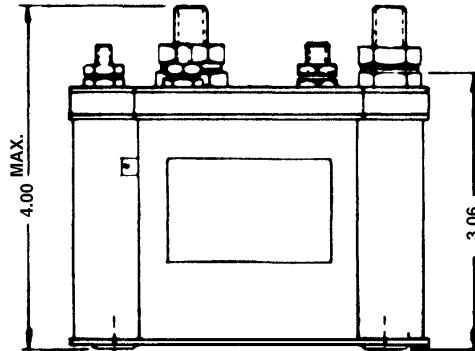


Features:

- SPST N.O. Main Contacts
- Remote Reset
- Economizing Coil
- 28 VDC
- 400 Amps
- High Reliability
- Meets many requirements of MIL-R-6106

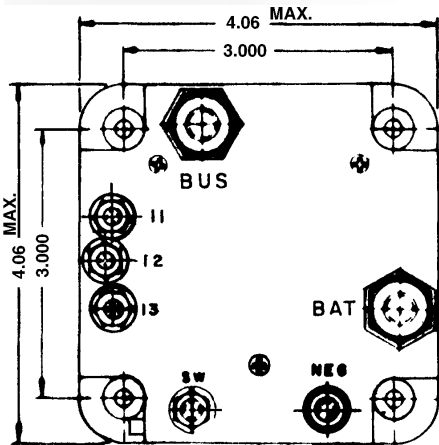

CONTACTOR CONFIGURATION

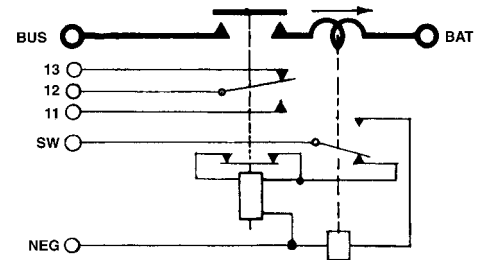

Notes:

Dimensions for this product are expressed in inches. Multiply values by 25.4 for millimeters.

PRODUCT SPECIFICATIONS	
Construction	Gasket Sealed, Vented
Main Contacts:	
Configuration	SPST N.O.
Voltage (Nominal)	28 VDC
Current (Resistive)	400 Amps
Auxiliary Contacts:	
Configuration	SPDT
Voltage (Nominal)	28 VDC
Current	
Resistive	5 Amps
Inductive	3 Amps
Coil Data:	
Duty Cycle	Continuous (Economizing)
Voltage (Nominal)	28 VDC
Pick-Up Voltage	18 VDC Maximum
Drop-Out Voltage	0.5 - 7 VDC
Coil Current @ 28 VDC & +25°C	
In-Rush	2 Amps
Hold	0.35 Amp
Operating Temperature	-55°C to +71°C
Life:	
Electrical	25,000 Cycles
Weight Maximum	3 Lbs. 8 Oz.

For factory-direct application assistance, contact the HARTMAN product team at (419) 521-9500, Fax (419) 526-2749.

© 2004 by Tyco Electronics Corporation. All Rights Reserved. HARTMAN and TYCO are trademarks.