

RoHS Compliant Product  
A suffix of "-C" specifies halogen & lead-free


## FEATURES

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction


## MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Lead solderable per MIL-STD-202 method 208 guaranteed
- Polarity: As Marked
- Mounting position: Any
- Weight: 2.064 grams (approximate)

ITO-220A

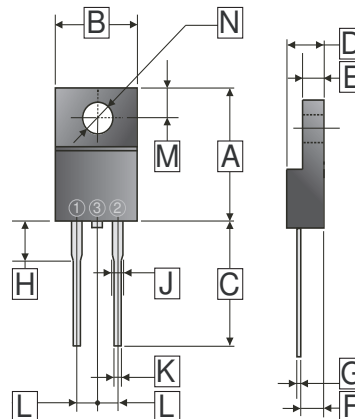

Dimensions in millimeters



REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	14.70	15.30	H	3.50	5.30
B	9.50	10.50	J	1.10	1.50
C	12.40	14.30	K	0.50	0.90
D	4.30	4.70	L	2.44	2.64
E	2.50	3.20	M	2.50	2.90
F	2.40	2.9	N	φ 3.1	φ 3.58
G	0.30	0.70			

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, de-rate current by 20%.)


Parameter	Symbol	Rating	Unit
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	200	V
Working Peak Reverse Voltage	$V_{RSM}$	200	V
Maximum DC Blocking Voltage	$V_{DC}$	200	V
Maximum Average Forward Rectified Current	$I_F$	15	A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	180	A
Maximum Instantaneous Forward Voltage	$V_F$	$I_F=15A, T_A=25^{\circ}C$	0.92
		$I_F=15A, T_A=125^{\circ}C$	0.8
Maximum DC Reverse Current at Rated DC Blocking Voltage <sup>4</sup>	$I_R$	$T_A=25^{\circ}C$	0.02
		$T_A=125^{\circ}C$	3
Typical Junction Capacitance <sup>1</sup>	$C_J$	350	pF
Typical Thermal Resistance <sup>2</sup>	$R_{\theta JC}$	4	°C / W
Typical Thermal Resistance <sup>3</sup>	$R_{\theta JA}$	15	°C / W
Voltage Rate Of Change (Rated $V_R$ )	$dv / dt$	10000	V / μs
Operating Temperature Range $T_J$	$T_J$	-50~150	°C
Storage Temperature Range $T_{STG}$	$T_{STG}$	-65~175	°C

Notes:


1. Measured at 1MHz and applied reverse voltage of 5.0V D.C.
2. Thermal Resistance Junction to Case.
3. Thermal Resistance Junction to Ambient.
4. Pulse test: 300μs pulse width, 1% duty cycle.

**RATINGS AND CHARACTERISTIC CURVES**


Typical Forward Current Derating Curve

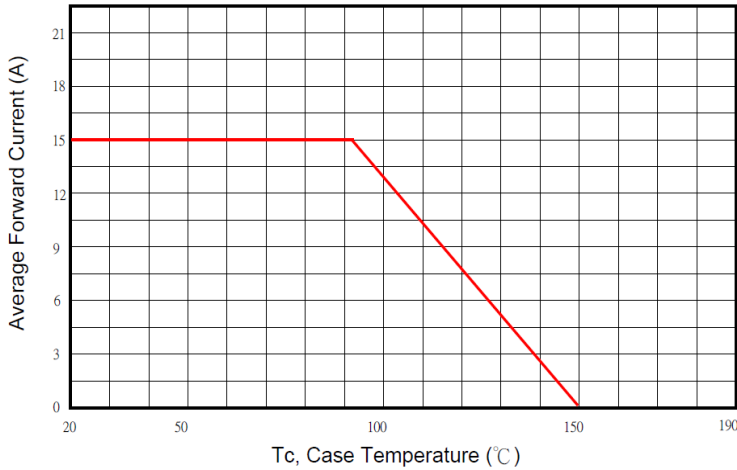


Typical Forward Characteristic

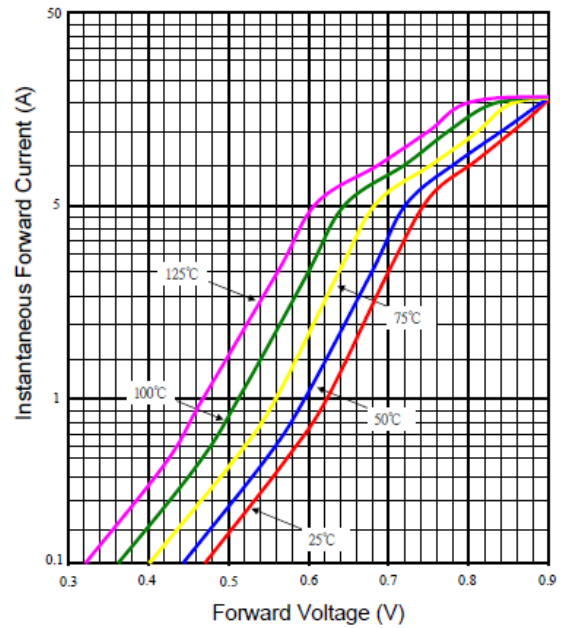

Typical Junction Capacitance

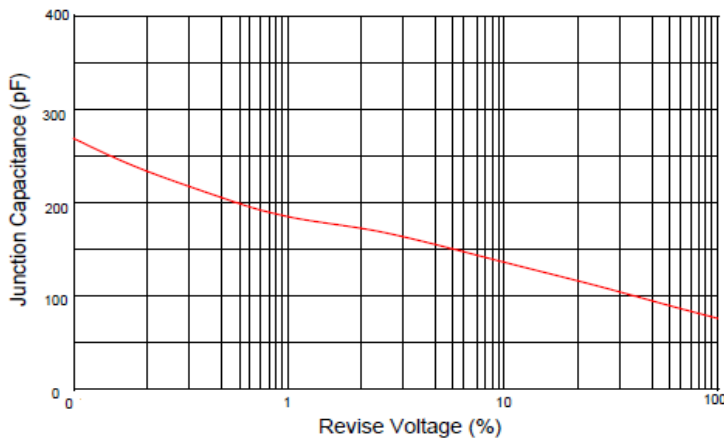

Typical Reverse Characteristic

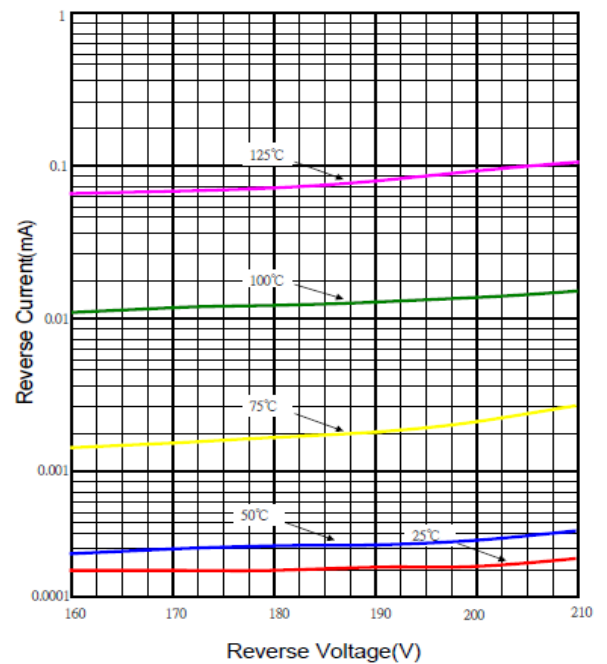

Maximum Non- Repetitive Forward Surge Current

