

Digital Audio Transformer

T-880

Turns Ratio (± 2%)	1:1
----------------------	-----

PARAMETER	MIN.	NOM.	MAX.	UNITS
¹ Open Circuit Inductance	225			μHy
² Leakage Inductance			0.7	μHy
^{2,3} Interwinding Capacitance (C _{WW})			2	pF
DC Resistance (any winding)		0.1		ohms
Isolation (HI-POT)	1500			V _{RMS}

TEST CONDITIONS:




- Oscillation Voltage = 100mV & Oscillation Frequency = 10.0 KHz
- Oscillation Voltage = 100mV & Oscillation Frequency = 100.0 KHz
- With Shield to Ground

Flammability: Materials used in the production of these units are UL94-VO and meet requirements of IEC 695-2-2 needle flame test.


Operating Temp. Range: -40 to +85 °C

Parts shipped in anti-static tubes. 50 pieces per tube

Tape & Reel Available

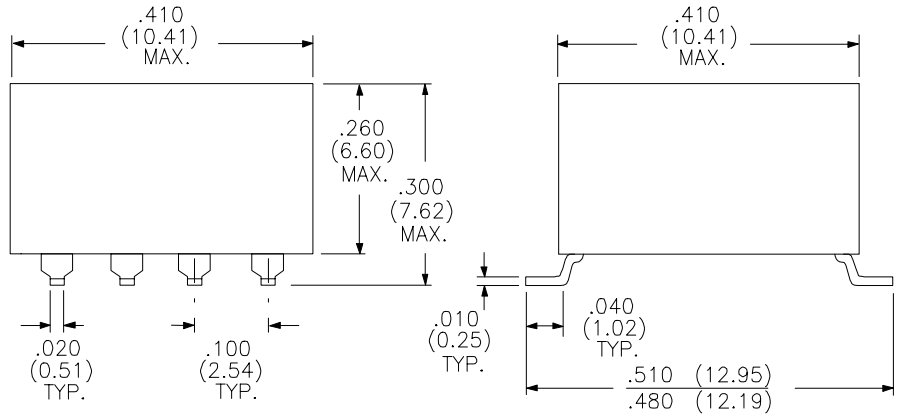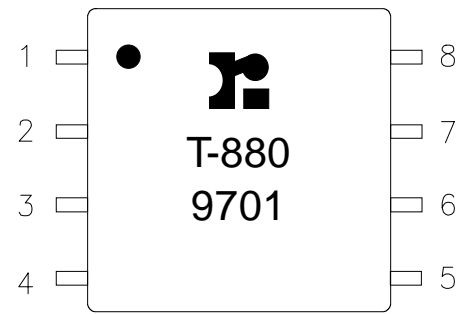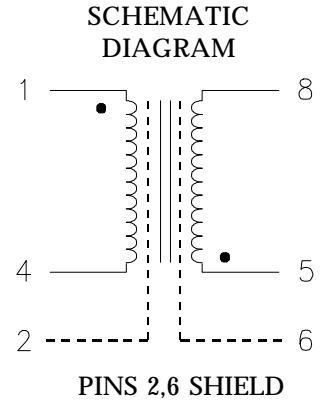

Suggested Pad Layout

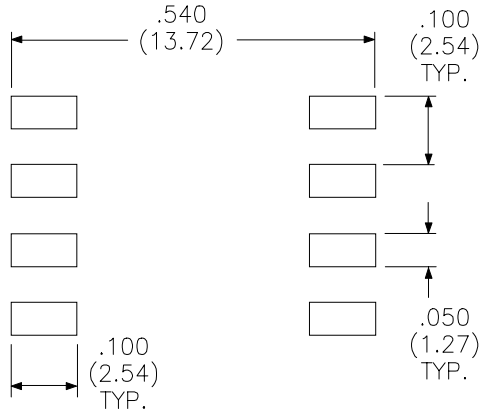

RHOMBUS P/N: T-880	
CUST P/N:	NAME:
DATE: 05/09/97	SHEET: 1 OF 1