


# High Power Broadband Noise Sources

## NMA5110-B1M

### 300 MHz to 1000 MHz

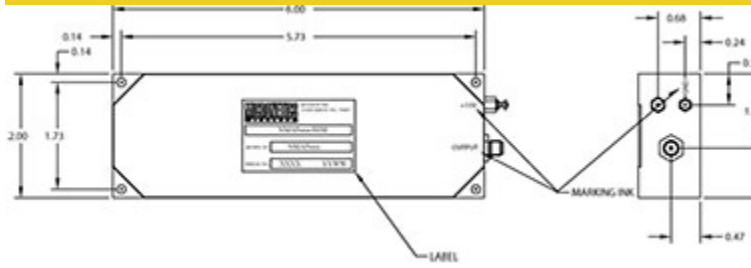

## Specifications

RF Frequency	300 MHz to 1000 MHz
Noise Output	93 to 100 dB ENR
Noise Spectral Density ( $N_0$ )	-79 dBm/Hz
Noise Power (N)	10 dBm
Flatness	4 dB P-P Max
VSWR	1.5:1
Peak Factor	5:1
Bias Voltage	15 V
Supply Current	200 mA Max
Impedance	50 ohms

## Package and Connectivity

Construction	Coaxial
Package Type	M Package

## Environmental

Operating Temperature	0 to 70 °C
Storage Temperature	-40 to 95 °C

## Notes

Specifications subject to change without notice

Micronetics, Inc. | Hudson, NH | Tel: 1-603-883-2900 | [www.Micronetics.com](http://www.Micronetics.com)

# MICRONETICS

