
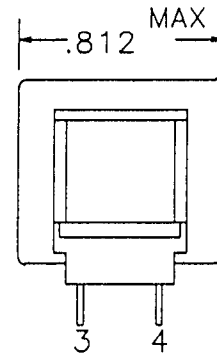
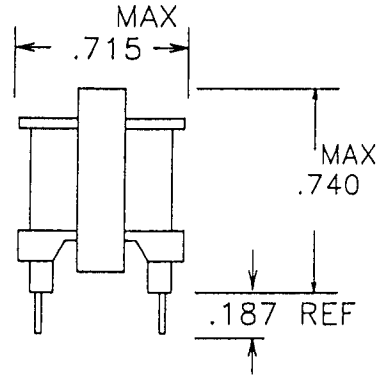


TY-301P.DCZ



DOT ABOVE  
TERMINAL #1  
ON BOBBIN

"TY-301P" TO READ  
TOWARD 1,2, SIDE

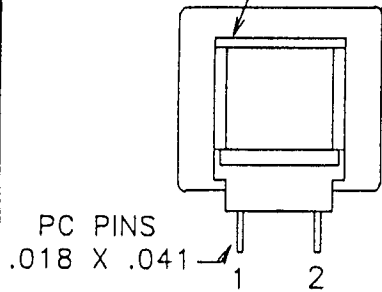

PC PINS  
.018 X .041

NUMBERS FOR REF  
ONLY, NOT TO APPEAR  
ON PART.

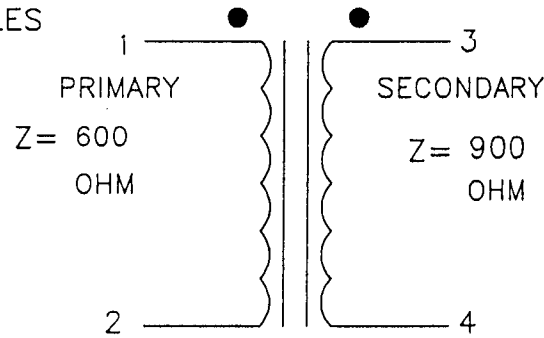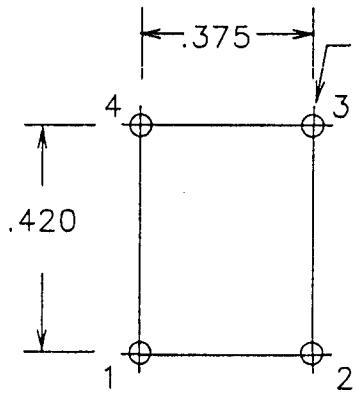

TURNS RATIO = 100%	
DC RESISTANCE IN OHMS	1-2 = 36 NOM
	3-4 = 76 NOM

APPLY = 2V, 300 HZ, PINS 1 - 2

INDUCTANCE = 1.5 HY MIN

HIPOT = 1500 VOLTS

PRI TO SEC & CORE  
SEC TO CORE

CONTINUITY = 100% IN FINAL.

IMPREGNATION NOTES = PREHEAT 2 HRS  
EPOXY SOAK. (NO EPOXY ON PINS)

FINAL ASSEMBLY NOTES

1. PINS TO BE CLEAN & SOLDERABLE

MagneTek

METHOD 1 X 1

MARKING  
ON

TY-301P ON TOP OF CORE  
DATE & SITE CODE SIDE OF CORE.

PART NO TY-301P

NON