



... Install dimension

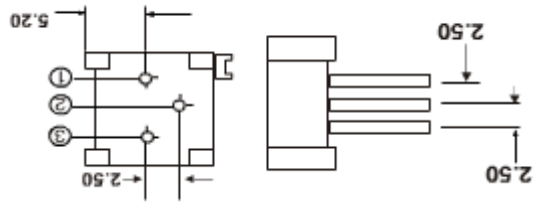

... Mutual dimension

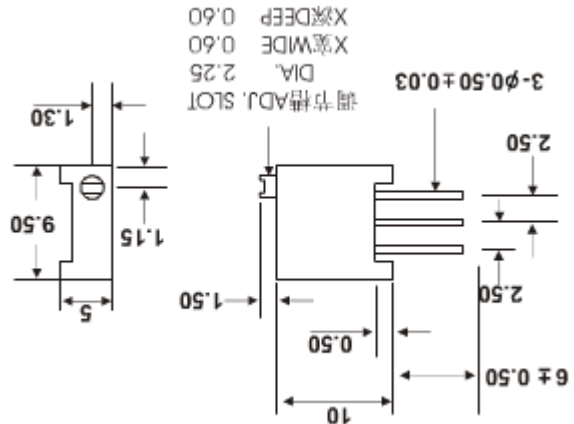

↑ click for larger photo

Standard Resistance Table

| Resistance Code | Resistance (Ohms) |
|-----------------|-------------------|
| 100 | 10 |
| 200 | 20 |
| 500 | 50 |
| 101 | 100 |
| 201 | 200 |
| 501 | 500 |
| 102 | 1,000 |
| 202 | 2,000 |
| 502 | 5,000 |
| 103 | 10,000 |
| 203 | 20,000 |
| 503 | 50,000 |
| 104 | 100,000 |
| 204 | 200,000 |
| 504 | 500,000 |
| 105 | 1,000,000 |
| 205 | 2,000,000 |

Special resistances available

Electrical Characteristics

- Standard Resistance Range.....50Ω ~ 2MΩ
- Resistance.....±10%
- Absolute Minimum Resistance.....≤ 1%或
- 10Ω
- Contact Resistance Variation.....CRV ≤ 3%或
- 5Ω
- Insulation Resistance.....R1 ≥ 1GΩ
- (100Vac)
- Withstand
- Voltage.....640Vac
- Effective Travel.....28 turns nom

Environmental Characteristics

- Power Rating, 315 volts max
- 0.5W@70°C, 0W@125°C
- Temperature Range.....-55°C ~ 125°C
- Temperature Coefficient.....±250ppm/°C
- Temperature Variation.....-55°C, 30min, +125°C
- 30min cycles
- ΔR ≤ 5%R, Δ(Uab/Uac) ≤ 5%
- Vibration.....10 ~ 500Hz, 0.75mm, 6h,
- ΔR ≤ 5%R, Δ(Uab/Uac) ≤ 7.5%
- Collision.....390m/s², 4000cycles, ΔR ≤ 5%R
- Electrical Endurance at 70°C.....0.5W@70°C
- 1000h, ΔR ≤ 10%R, CRV ≤ 3% or 5Ω

How To Order

