


molex® 1.25mm (.049") Pitch Cable Holder

51071 Vertical For Ribbon Cable



FEATURES AND SPECIFICATIONS

Features and Benefits

- Sizes 3 to 16 circuits
- For topcoated ribbon cable
- Wire range: 28 AWG
- Insulation diameter: 0.95mm max.
- Strip length: 6.0mm


Reference Information

Packaging: Bag
Designed In: Millimeters

Physical

Housing: 6/6 nylon, UL 94V-0
Operating Temperature: -40 to +105°C

CATALOG DRAWING (FOR REFERENCE ONLY)

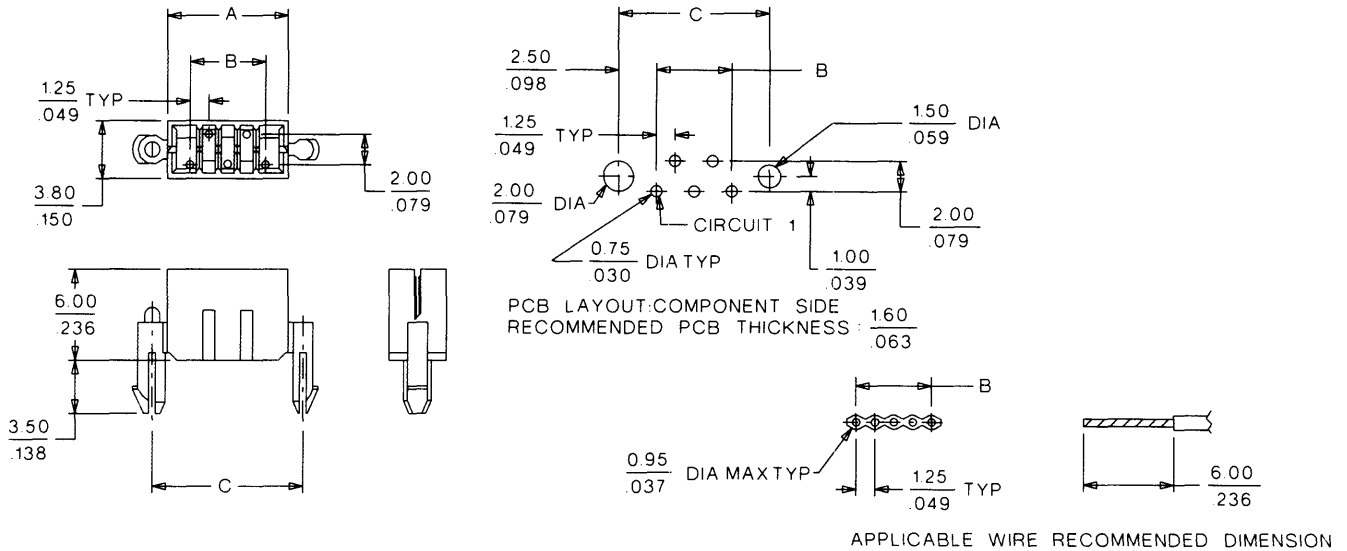

ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.	Dimension		
		A	B	C
3	51071-0300	5.50 (.216)	2.50 (.098)	7.50 (.295)
4	51071-0400	6.75 (.265)	3.75 (.147)	8.75 (.344)
5	51071-0500	8.00 (.314)	5.00 (.196)	10.00 (.393)
6	51071-0600	9.25 (.364)	6.25 (.246)	11.25 (.442)
7	51071-0700	10.50 (.413)	7.50 (.295)	12.50 (.492)
8	51071-0800	11.75 (.462)	8.75 (.344)	13.75 (.541)
9	51071-0900	13.00 (.511)	10.00 (.393)	15.00 (.590)
10	51071-1000	14.25 (.561)	11.25 (.442)	16.25 (.639)
11	51071-1100	15.50 (.610)	12.50 (.492)	17.50 (.688)
12	51071-1200	16.75 (.659)	13.75 (.541)	18.75 (.738)
13	51071-1300	18.00 (.708)	15.00 (.590)	20.00 (.787)
14	51071-1400	19.25 (.757)	16.25 (.639)	21.25 (.836)
15	51071-1500	20.50 (.807)	17.50 (.688)	22.50 (.885)
16	51071-1600	21.75 (.856)	18.75 (.738)	23.75 (.935)