

Polyester Film Capacitors



PEI Series
(Inductive)


MERITEK

FEATURES

- High moisture resistance
- Good solderability
- Available on tape and reel for automatic insertion
- ESR is minimized



SPECIFICATIONS

1. Operating temperature: -40°C to +105°C
2. Capacitance range: 0.001μF to 0.47μF
3. Capacitance tolerance: ±5%(J), ±10%(K), ±20%(M)
4. Rated voltage: 50VDC, 100VDC, 250VDC, 400VDC
5. Dissipation factor: 1.0% max. at 1KHz, 25°C
6. Insulation resistance: >20000MΩ (C ≤ 0.1μF)
>2000MΩ • μF (C > 0.1 μF)

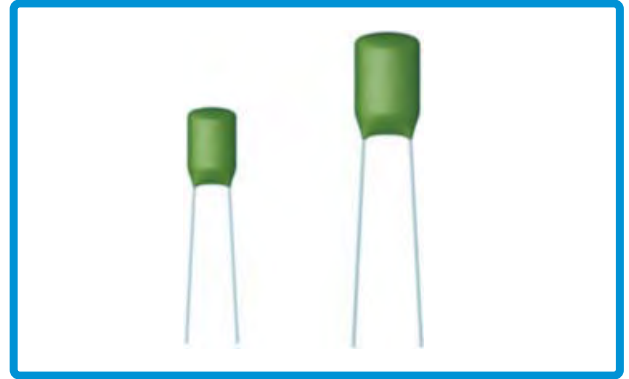

PEI are constructed with polyester film dielectric, aluminum foil electrodes, tinned copper leads, and an inductive epoxy resin coating. They are suitable for signal coupling, circuit isolation, bypassing, and filtering and other applications. PEI are ideal for use in televisions, radio, tape recorders, stereo equipment, and other electronic devices.

PART NUMBERING SYSTEM

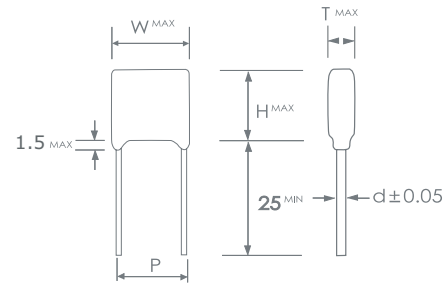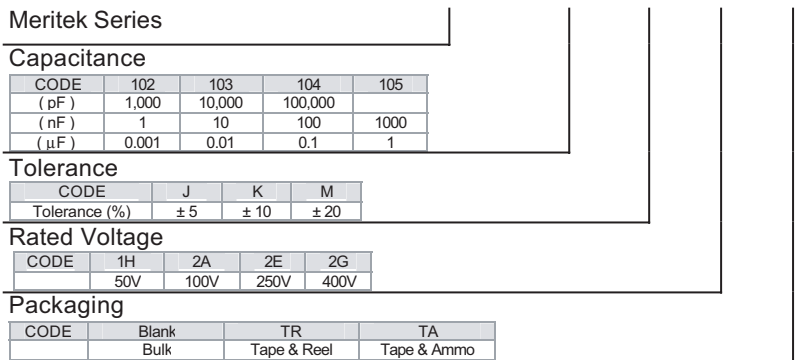

Dimensions in millimeters (mm)

Rated Voltage DIM.	50VDC/100VDC					250VDC					400VDC				
	W	H	T	P± 1	dØ	W	H	T	P± 1	dØ	W	H	T	P± 1	dØ
0.0010	6.0	11.0	4.0	3.5	0.5	6.0	11.0	4.0	3.5	0.5	7.0	11.5	4.0	4.0	0.5
0.0012	6.0	11.0	4.0	3.5	0.5	6.0	11.0	4.0	3.5	0.5	7.2	12.0	4.0	4.0	0.5
0.0015	6.0	11.0	4.0	3.5	0.5	6.0	11.0	4.0	3.5	0.5	7.2	12.0	4.0	4.0	0.5
0.0018	6.0	11.0	4.0	3.5	0.5	6.0	11.0	4.0	3.5	0.5	7.5	12.5	4.0	4.0	0.5
0.0022	6.0	11.0	4.0	3.5	0.5	6.0	11.0	4.0	3.5	0.5	7.5	12.5	4.0	4.0	0.5
0.0027	7.0	11.0	4.0	3.5	0.5	7.0	11.0	4.0	3.5	0.5	8.0	13.0	4.5	6.0	0.5
0.0033	7.0	11.0	4.0	3.5	0.5	7.0	11.0	4.0	3.5	0.5	8.0	13.0	4.5	6.0	0.5
0.0039	7.0	11.0	4.0	4.0	0.5	7.0	11.0	4.0	4.0	0.5	9.0	14.0	5.0	6.0	0.5
0.0047	7.0	11.0	4.0	4.0	0.5	7.0	11.0	4.0	4.0	0.5	9.0	14.0	5.0	6.0	0.5
0.0056	7.0	11.0	4.0	4.0	0.5	7.0	11.0	4.0	4.0	0.5	9.5	14.0	5.5	6.0	0.5
0.0068	7.0	11.0	4.0	4.0	0.5	7.0	11.0	4.0	4.0	0.5	9.5	14.0	5.5	6.0	0.5
0.0082	7.0	11.0	4.0	4.0	0.5	7.0	11.0	4.0	4.0	0.5	10.5	15.0	6.7	7.0	0.5
0.010	7.0	11.0	4.0	4.0	0.5	7.0	11.0	4.0	5.0	0.5	10.5	15.0	6.7	7.0	0.5
0.012	7.0	11.0	4.0	4.0	0.5	8.0	13.5	4.5	5.0	0.5	12.0	15.5	8.0	7.0	0.5
0.015	8.0	11.0	4.0	4.0	0.5	8.0	13.5	4.5	5.0	0.5	12.0	15.5	8.0	7.0	0.5
0.018	8.0	11.0	4.0	4.0	0.5	9.0	14.0	6.0	6.5	0.5	12.0	18.5	8.0	7.0	0.6
0.022	8.0	12.0	4.0	5.0	0.5	9.0	14.0	6.0	6.5	0.5	12.0	18.5	8.0	7.0	0.6
0.027	8.0	12.0	4.0	5.0	0.5	10.0	15.0	6.5	6.5	0.5	13.5	21.0	8.0	9.0	0.6
0.033	9.0	13.0	4.5	5.5	0.5	10.0	15.0	6.5	6.5	0.5	13.5	21.0	8.0	9.0	0.6
0.039	9.0	13.0	5.0	6.0	0.5	12.5	17.5	8.5	6.5	0.6	15.5	22.0	9.5	9.0	0.6
0.047	10.0	13.0	5.0	6.0	0.5	12.5	17.5	8.5	6.5	0.6	15.5	22.0	9.5	9.0	0.6
0.056	10.0	13.5	5.5	6.0	0.5	13.8	21.0	8.5	7.5	0.6	17.5	23.5	11.5	9.0	0.6
0.068	10.0	13.5	6.0	6.5	0.5	13.8	21.0	8.5	7.5	0.6	17.5	23.5	11.5	9.0	0.6
0.082	11.0	13.5	6.0	7.0	0.5	16.0	22.0	9.5	8.5	0.6	19.0	24.5	11.0	11.5	0.6
0.10	11.0	14.0	6.5	7.5	0.5	16.0	22.0	9.5	8.5	0.6	19.0	24.5	11.0	11.5	0.6
0.12	13.0	14.0	6.5	9.0	0.6										
0.15	13.0	15.0	7.0	9.0	0.6										
0.18	14.0	16.0	7.0	9.5	0.6										
0.22	14.0	17.0	7.5	9.5	0.6										
0.27	15.0	17.0	9.0	9.5	0.6										
0.33	16.5	19.0	9.5	10.0	0.6										
0.39	17.0	20.0	10.5	10.0	0.6										
0.47	17.0	21.0	11.0	10.0	0.6										