


## Fast Switching Plastic Rectifier

Reverse Voltage 50 to 800V  
Forward Current 3.0A

DO-201AD

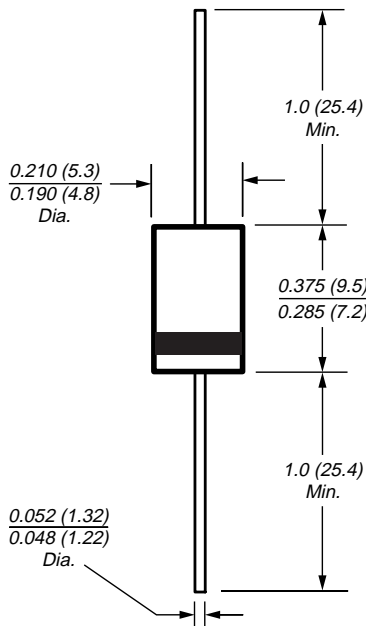

### Features

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- High surge current capability
- Construction utilizes void-free molded plastic technique
- 3.0 Ampere operation at  $T_A=55^\circ\text{C}$  with no thermal runaway
- Fast switching for high efficiency
- High temperature soldering guaranteed:  $250^\circ\text{C}/10$  seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

### Mechanical Data

**Case:** JEDEC DO-201AD, molded plastic body

**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.04 oz., 1.1 g

**Packaging codes/options:**

- 1/Bulk - 1.5K per container, 15K per box
- 4/1.4K per 13" reel, 5.6K per box
- 23/1K per ammo mag., 9K per box

## Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	Symbol	SRP 300A	SRP 300B	SRP 300D	SRP 300G	SRP 300J	SRP 300K	Unit
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	V
Maximum RMS voltage	VRMS	35	70	140	280	420	560	V
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	V
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=55^\circ\text{C}$	$I_{F(AV)}$	3.0						A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) at $T_A=55^\circ\text{C}$	$I_{FSM}$	150						A
Typical thermal resistance <sup>(1)</sup>	$R_{\theta JA}$	22						$^\circ\text{C}/\text{W}$
Operating junction temperature range	$T_J$	-50 to +125						$^\circ\text{C}$
Storage temperature range	$T_{STG}$	-50 to +150						$^\circ\text{C}$


## Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Maximum instantaneous forward voltage at 3.0A	$V_F$	1.3						V
Maximum DC reverse current at rated DC blocking voltage	$I_R$	10						$\mu\text{A}$
		200	300	400	500			
Maximum reverse recovery time at $I_F=0.5\text{A}$ , $I_R=1.0\text{A}$ , $I_{rr}=0.25\text{A}$	$t_{rr}$	100	100	150	150	200	200	ns
Typical junction capacitance at 4.0V, 1MHz	$C_J$	28						pF


**Notes:** (1) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length with both leads equally heat sink

## Ratings and Characteristic Curves ( $T_A = 25^\circ\text{C}$ unless otherwise noted)


**Fig. 1 – Forward Current Derating Curves**

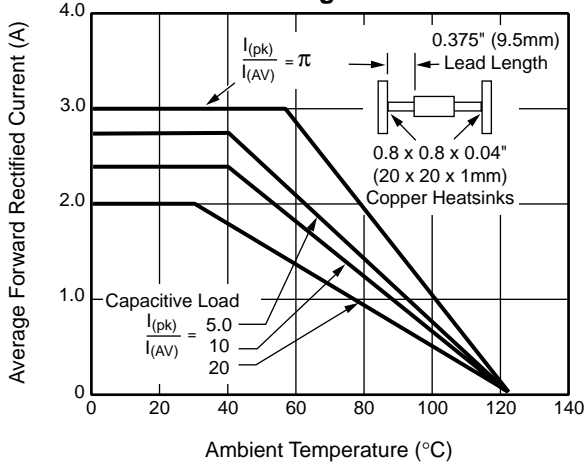


**Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current**

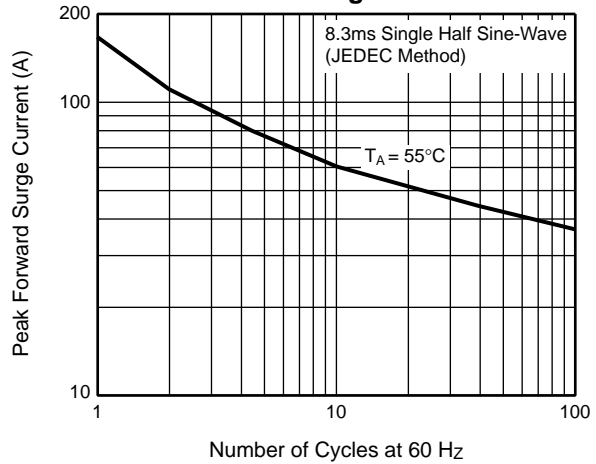

**Fig. 3 – Typical Instantaneous Forward Characteristics**

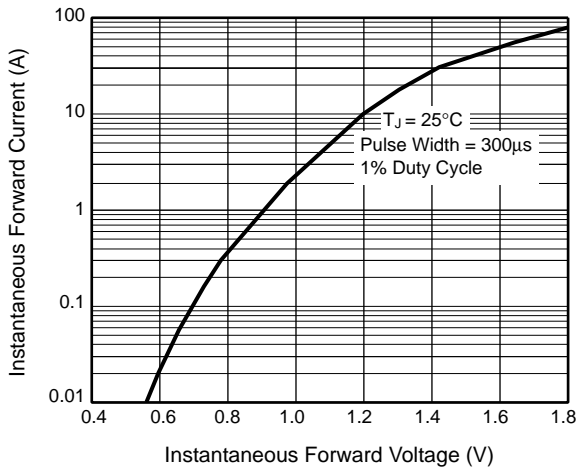

**Fig. 4 – Typical Reverse Characteristics**

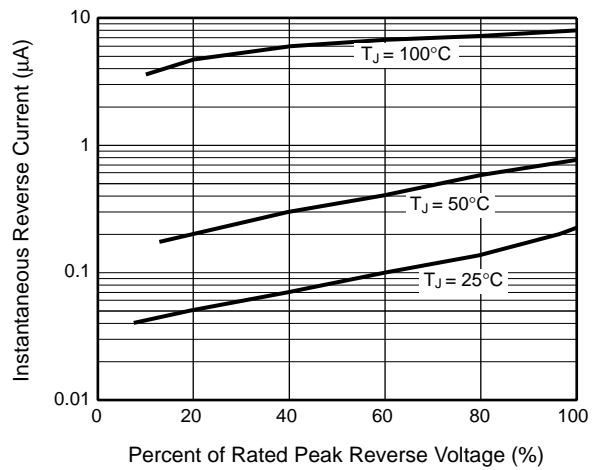

**Fig. 5 – Typical Junction Capacitance**

