
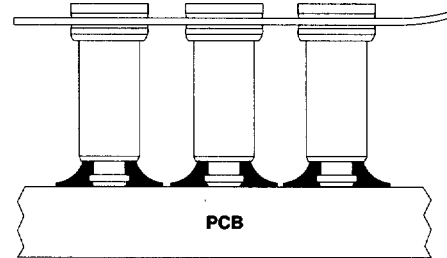


Surface Mount Dual In-line Sockets & Adapters

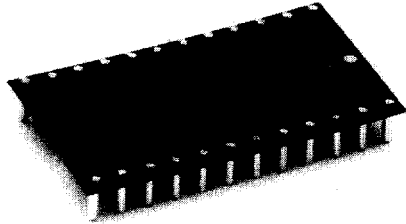

Features:

- Sockets surface mount to PCB.
- Available in high temperature Peel-A-Way® socket terminal carrier.
- Peel-A-Way® carrier can be left in place for added stability.
- High reliability screw machine terminals with multiple finger beryllium copper contacts.
- Available with solder preforms.

Terminals and Contacts:


Terminal: Brass - Copper Alloy 360, ASTM-B-16
 Contact: Beryllium Copper - Copper Alloy 172, ASTM-B-194

Plating:


Terminal: Tin-Lead over Nickel
 Contact: Gold over Nickel

Body Material:

KS - Polyimide Film
 Temp. range -269°C to 400°C
 (-452°F to 752°F)




Peel-A-Way®
Surface Mount Sockets




Surface Mount Top/Bottom

Terminal Information

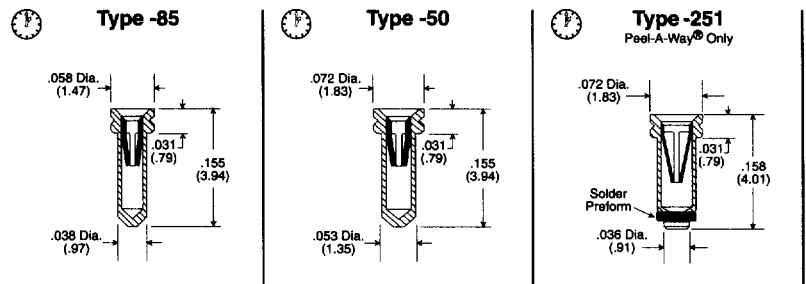

Quick turn delivery available on standard terminal types.
 Additional terminal types available.

How To Order

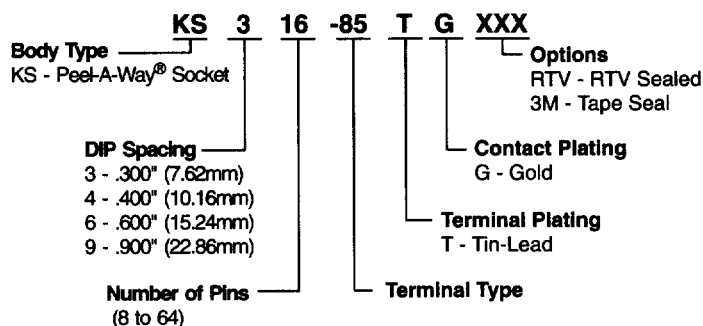

Socket Option

