

# PRODUCT SPECIFICATION

DATE: 03/26/2012

<b>cosmo</b> ELECTRONICS CORPORATION	Photocoupler : <b>KPC410</b>	NO.61P04029	REV
		SHEET 1 OF 8	4

## Super High Speed Response Photocoupler

### ●Features

1. Pb free and RoHS compliant.
2. 5 pin Mini-flat package.
3. Super high speed response ( $t_{PLH}, t_{PHL}$ :typ.45ns at  $R_L=350$  ohm).
4. Instantaneous common mode rejection voltage( $CMH$ :typ. 500V/us).
5. High isolation voltage between input and output (Viso:3750Vrms).
6. Low input current drive ( $I_{FHL}$ : Max. 5mA).
7. LSTTL and TTL compatible output.
8. Agency Approvals
  - UL approved : UL1577 No.E169586
  - CUL approved : UL1577 No.E169586
  - VDE approved : EN 60747 No.40020973

### ●Applications


1. High speed interfaces for computer peripherals, microcomputer systems.
2. High speed line receivers.
3. Noise reduction.
4. Interfaces for data transmission equipment.
5. Inverter.

# PRODUCT SPECIFICATION

DATE: 03/26/2012


<b>cosmo</b> ELECTRONICS CORPORATION	Photocoupler :	NO. 61P04029	REV
	<b>KPC410</b>	SHEET 2 OF 8	4

## 1. OUTSIDE DIMENSION : UNIT (mm)

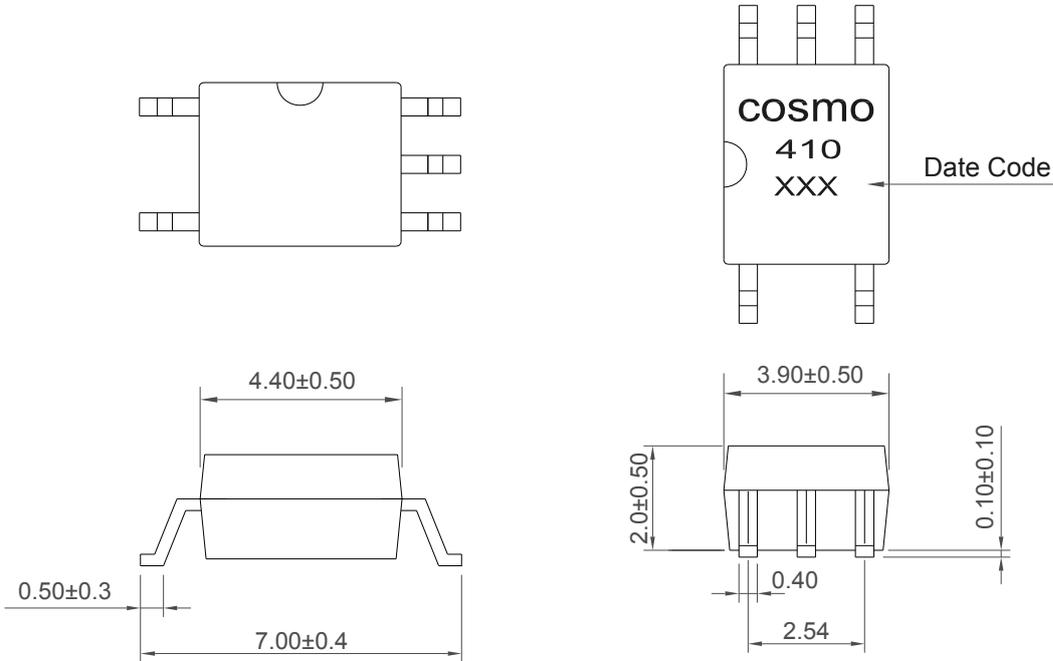

TOLERANCE :  $\pm 0.2$ mm

## 2. SCHEMATIC : Top View

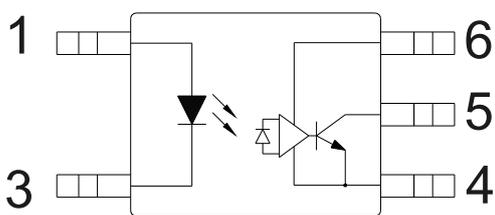

- 1. Anode
- 3. Cathode
- 4. GND
- 5. Vo
- 6. Vcc

# PRODUCT SPECIFICATION

DATE: 03/26/2012

<b>cosmo</b> ELECTRONICS CORPORATION	Photocoupler :	NO. 61P04029	REV
	<b>KPC410</b>	SHEET 3 OF 8	4

## ●Absolute Maximum Ratings

(Ta=25°C)

Parameter	Symbol	Rating	Unit
Input	Forward current (*1)	IF	25
	Peak forward current (*2)	IFM	40
	Reverse voltage	VR	5
	Power dissipation	PD	45
Output	Supply voltage	VCC	7
	High level output voltage	VOIL	7
	Low level output current	IOL	50
	Output collector power dissipation	PC	85
Isolation voltage 1 minute (*3)	Viso	3750	Vrms
Operating temperature	Topr	-40 to +85	°C
Storage temperature	Tstg	-55 to +125	°C
Soldering temperature 10 second	Tsol	260	°C

## ●Electro-optical Characteristics

(Ta= 0 to+ 85°C unless otherwise specified)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input forward voltage (*4)	VF	IF=10mA, Ta=25°C	-	1.6	1.75	V
Input reverse voltage	BVR	IR=10uA, Ta=25°C	5	-	-	V
Input capacitance	CIN	VF=0, f=1MHZ	-	60	-	pF
Logic (1) output current	IOH	VCC=5.5V, VO=5.5V, IF=250uA	-	2	250	uA
Logic (0) output voltage	VOL	VCC=5.5V, IF=5mA, IOL(Sinking)=13mA	-	0.4	0.6	V
Logic (1) supply current	ICCH	VCC=5.5V, IF=0mA	-	7	15	mA
Logic (0) supply current	ICCL	VCC=5.5V, IF=10mA	-	13	18	mA
Leak current (*5)	II-O	45%RH, Ta=25°C, t=5s, VI-O=3000VDC	-	-	1.0	mA
Isolation resistance (input-output) (*5)	RI-O	VI-O=500V, Ta=25°C	-	10 <sup>12</sup>	-	Ω
Capacitance (input-output) (*5)	CI-O	f=1MHZ, Ta=25°C	-	0.6	-	pF
Propagation delay time Output (0)→(1) (*6)	tPLH	IF=7.5mA, VCC=5V, RL=350Ω, CL=15pF, Ta=25°C	-	45	75	ns
Propagation delay time Output (1)→(0) (*6)	tPHL		-	45	75	ns
Output rise-fall time (10 to 90%)	tr,tf	IF=7.5mA, VCC=5V, RL=350Ω, CL=15pF	-	30	-	ns
Instantaneous common mode rejection voltage "output(0)" (*7)	CMH	IF=0mA, VCM=10V, VO(Min)=2.0V RL=350Ω	-	500	-	V/us
Instantaneous common mode rejection voltage "output(1)" (*7)	CML	IF=5mA, VCM=10V, VO(Max)=0.8V RL=350Ω	-	-500	-	V/us

# PRODUCT SPECIFICATION

DATE: 03/26/2012

<b>cosmo</b> ELECTRONICS CORPORATION	Photocoupler : <b>KPC410</b>	NO. 61P04029	REV
		SHEET 4 OF 8	4

Note ) Typical values are all at  $V_{CC} = 5V$ ,  $T_a = 25^\circ C$

\*1  $T_a = 0$  to  $70^\circ C$ .

\*2 Pulse width  $\leq 1ms$

\*3 40 to 80%RH AC for 1 minute,  $f=60HZ$ .

\*4 At  $I_{in} = 10mA$ ,  $V_F$  decreases at the rate of  $1.6mV/^\circ C$  if the temperature goes up.

\*5 Measured as 2-pin element. Connect pins 2 and 3, connect pins 5, 6, 7 and 8.

\*6 Refer to the Fig. 1.


\*7 CMH represents a common mode voltage ignorable rise time ratio that can hold logic (1) state in output.

CML represents a common mode voltage ignorable fall time ratio that can hold logic (0) state in output.

## ●Recommended Operating Conditions

Parameter	Symbol	Min	Max	Unit
Low level input current	$I_{FL}$	0	250	$\mu A$
High level input current	$I_{FH}$	7.0	15	mA
Supply voltage	$V_{CC}$	4.5	5.5	V
Fanout (TTL load )	N	-	8	-
Operating temperature	$T_{opr}$	-40	85	$^\circ C$

## Circuit Block Diagram

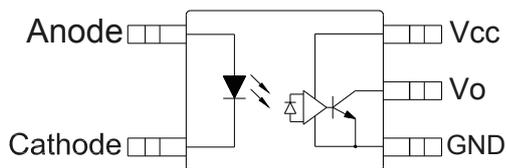

# PRODUCT SPECIFICATION

DATE: 03/26/2012

<b>cosmo</b> ELECTRONICS CORPORATION	Photocoupler : <b>KPC410</b>	<b>NO. 61P04029</b>	<b>REV</b> 4
		<b>SHEET 5 OF 8</b>	

Fig.1 Test Circuit for Propagation Delay time


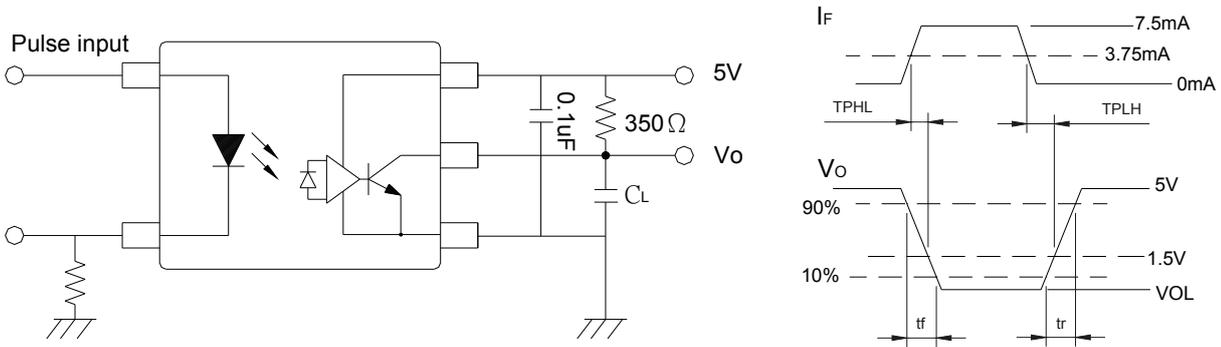


Fig.2 Test Circuit for Instantaneous Common Mode Rejection Voltage

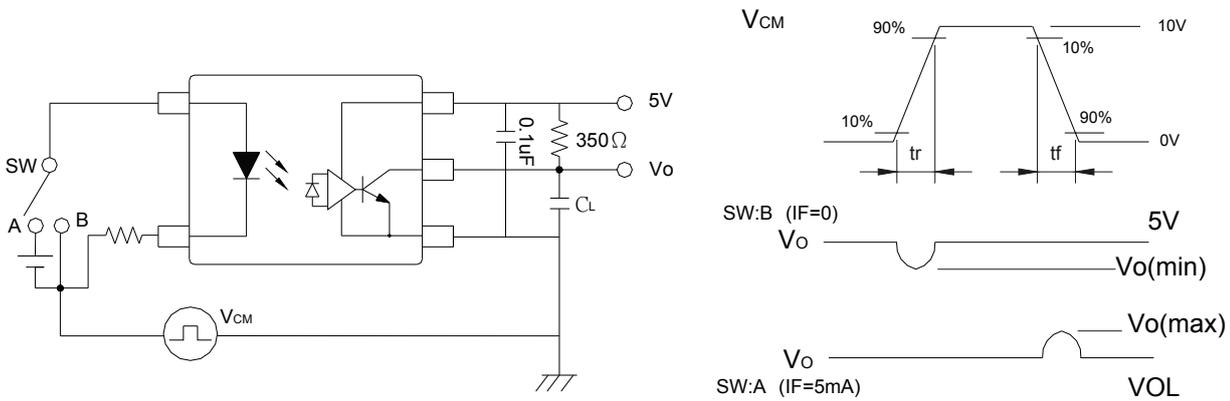

# PRODUCT SPECIFICATION

DATE: 03/26/2012

<b>cosmo</b> ELECTRONICS CORPORATION	Photocoupler :	NO. 61P04029	REV
	<b>KPC410</b>	SHEET 6 OF 8	4

Fig.1 Low Level Output Voltage vs. Ambient Temperature

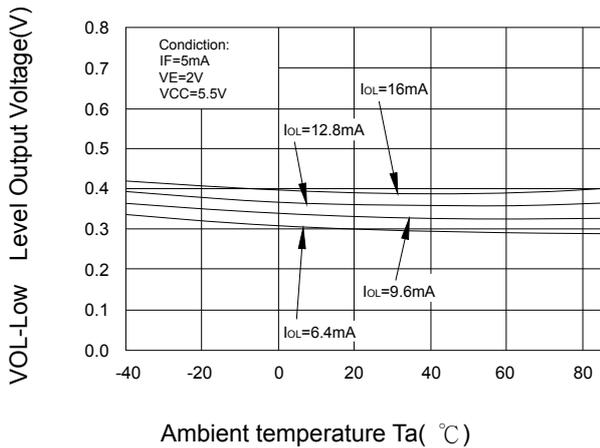


Fig.2 Input Diode Forward Voltage vs. Forward Current

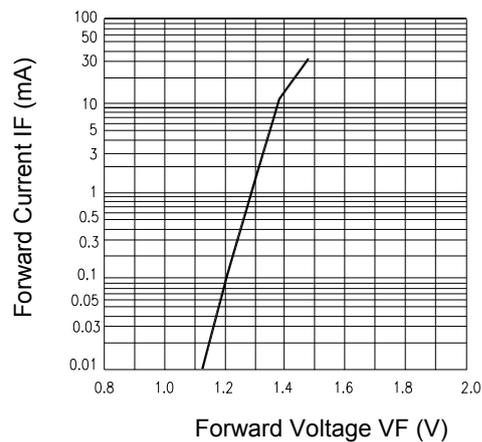


Fig.3 Switching Time vs. Forward Current

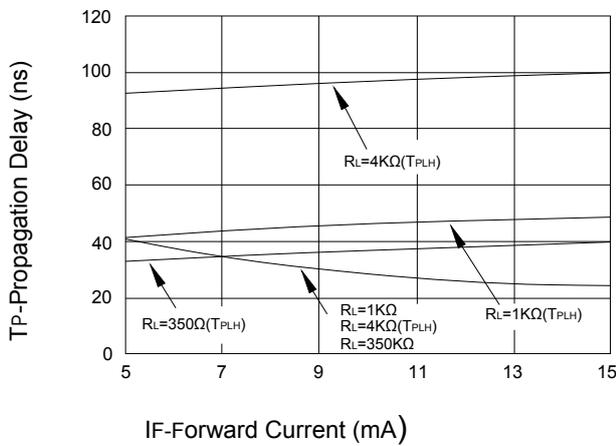


Fig.4 Low Level Output Current vs. Ambient Temperature

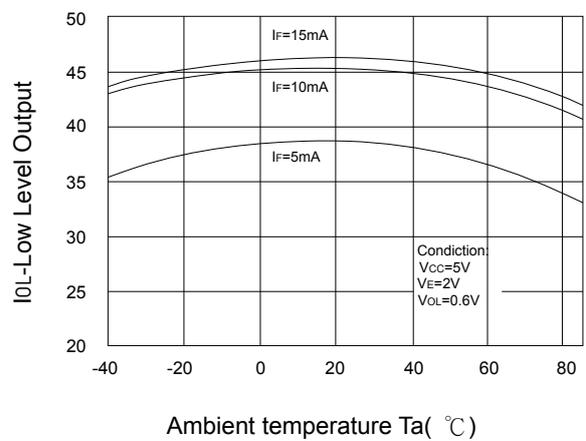


Fig.5 Input Threshold Current vs. Ambient Temperature


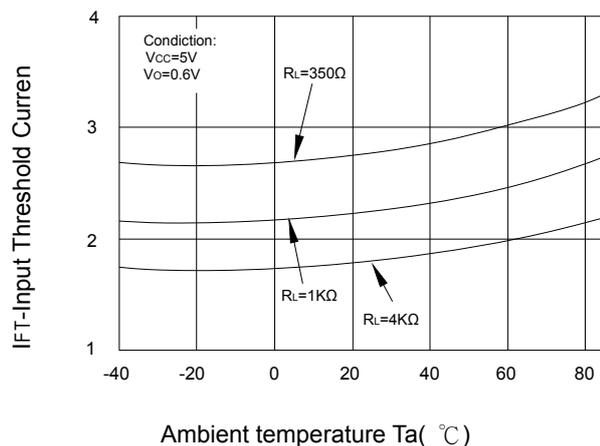


Fig.6 Output Voltage vs. Input Forward Current

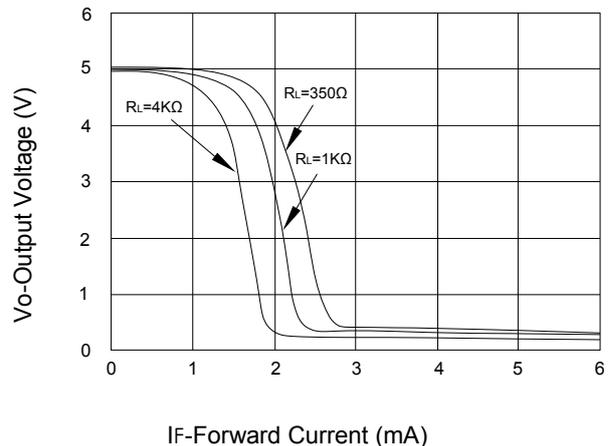

# PRODUCT SPECIFICATION

DATE: 03/26/2012

<b>cosmo</b> ELECTRONICS CORPORATION	Photocoupler : <b>KPC410</b>	<b>NO. 61P04029</b>	<b>REV</b> 4
		<b>SHEET 7 OF 8</b>	

Fig.7 Pulse Width Distortion vs. Temperature

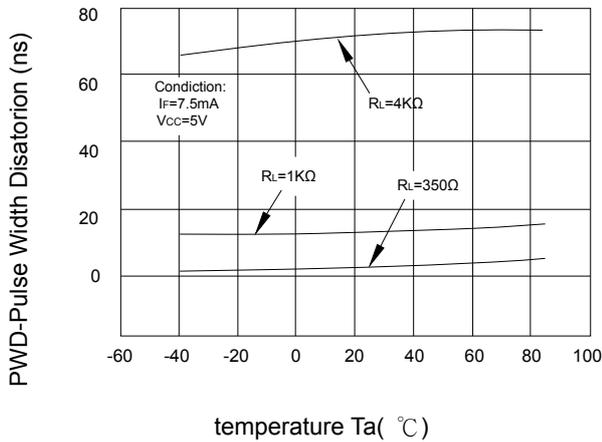


Fig.8 Rise and Fall Time vs. Temperature

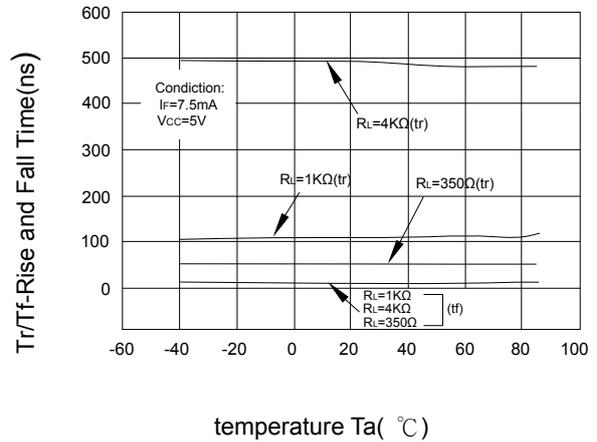


Fig.9 Switch Time vs. Temperature


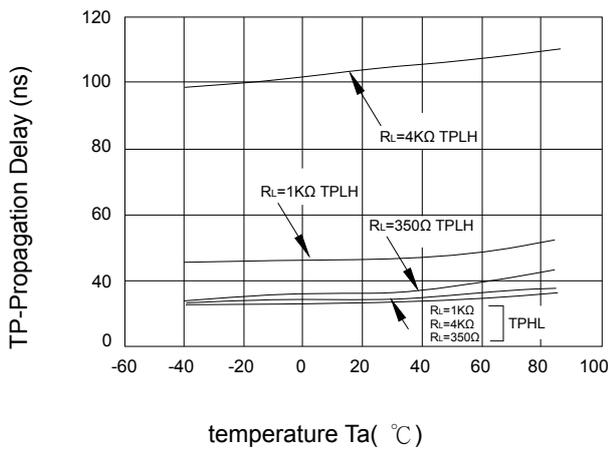


Fig.10 High Level Output Current vs. Temperature

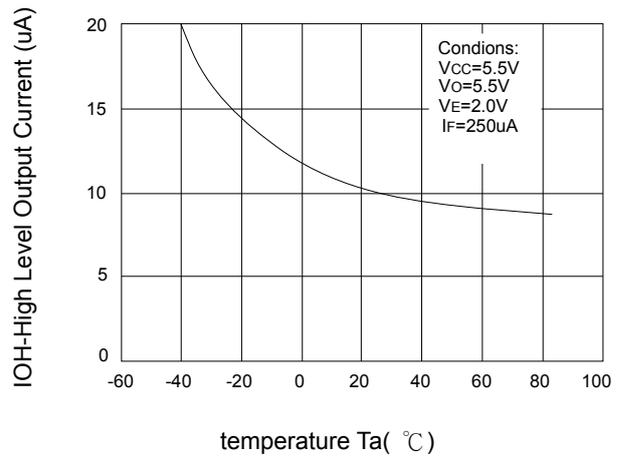

# PRODUCT SPECIFICATION

DATE: 03/26/2012

<b>cosmo</b> ELECTRONICS CORPORATION	Photocoupler : <b>KPC410</b>	NO. 61P04029	REV
		SHEET 8 OF 8	4

## ● Notice

The information contained in this document is intended to be a general product description and is subject to change without notice. Please contact cosmo in order to obtain the latest device data sheets before using any cosmo device. cosmo does not assume any responsibility for use of any circuitry described. No circuit patent licenses are implied. This publication is the property of cosmo. No part of this publication may be reproduced or copied in any form or by any means, or transferred to any third party without the prior written consent of cosmo Electronics Corporation.

The devices listed in this document are designed for general applications only in electronic equipment. No devices shall be deployed which require higher level of reliability such as :

- Medical and other life support equipments.
- Space application.
- Telecommunication equipment ( trunk lines ).
- Nuclear power control equipment.

Unless it received prior written approval from cosmo.

cosmo takes no responsibility for damages arise form the improper usage of our device. Please contact cosmo for further information regarding the above notices.