


SD

879-5-15 MA9

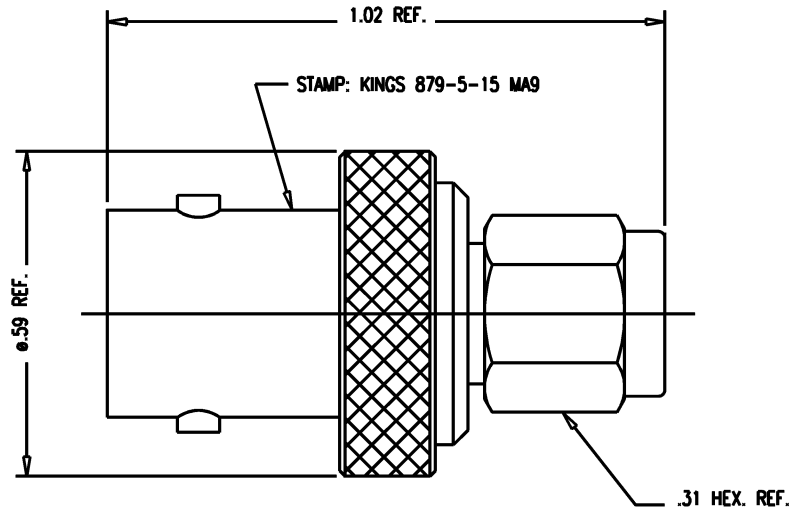

NOTES:

1. INTERFACES PER MIL-STD-348, FIG. 310-1 (SMA) AND 301-2 (BNC).
2. MATERIALS:
  - INSULATOR: TEFLON, ASTM-D-4894
  - CENTER CONTACT } BER. COP., ASTM-B-196
  - SMA BODY } BER. COP., ASTM-B-196
  - C-RING } BER. COP., ASTM-B-196
  - BNC BODY: BRASS, ASTM-B16
3. FINISHES:
  - ALL METAL PARTS EXCEPT C-RING: GOLD PLATE PER MIL-G-45204
4. ELECTRICAL CHARACTERISTICS:
  - NOMINAL IMPEDANCE: 50 OHMS
  - FREQUENCY RANGE: DC TO 4 GHZ
  - WORKING VOLTAGE: 500 VRMS

REVISIONS

ISSUE	CHANGES
7	CN 37502 C REDRAWN KH 12/05/97

879515SD

SCALE	4:1		
APPROX SURFACE AREA			
USED ON			
REF:			
ADPT, F-F, BNC TO SMA			
DRAWN	JJM	DATE	12/03/70
DESIGN	PW	DATE	01/13/71
APPR.		DATE	

**KINGS**  
ELECTRONICS CO., INC.  
TUCKAHOE, NEW YORK 10707

879-5-15 MA9

SD