DASH NO.	M CODE	MADE FROM

GSD

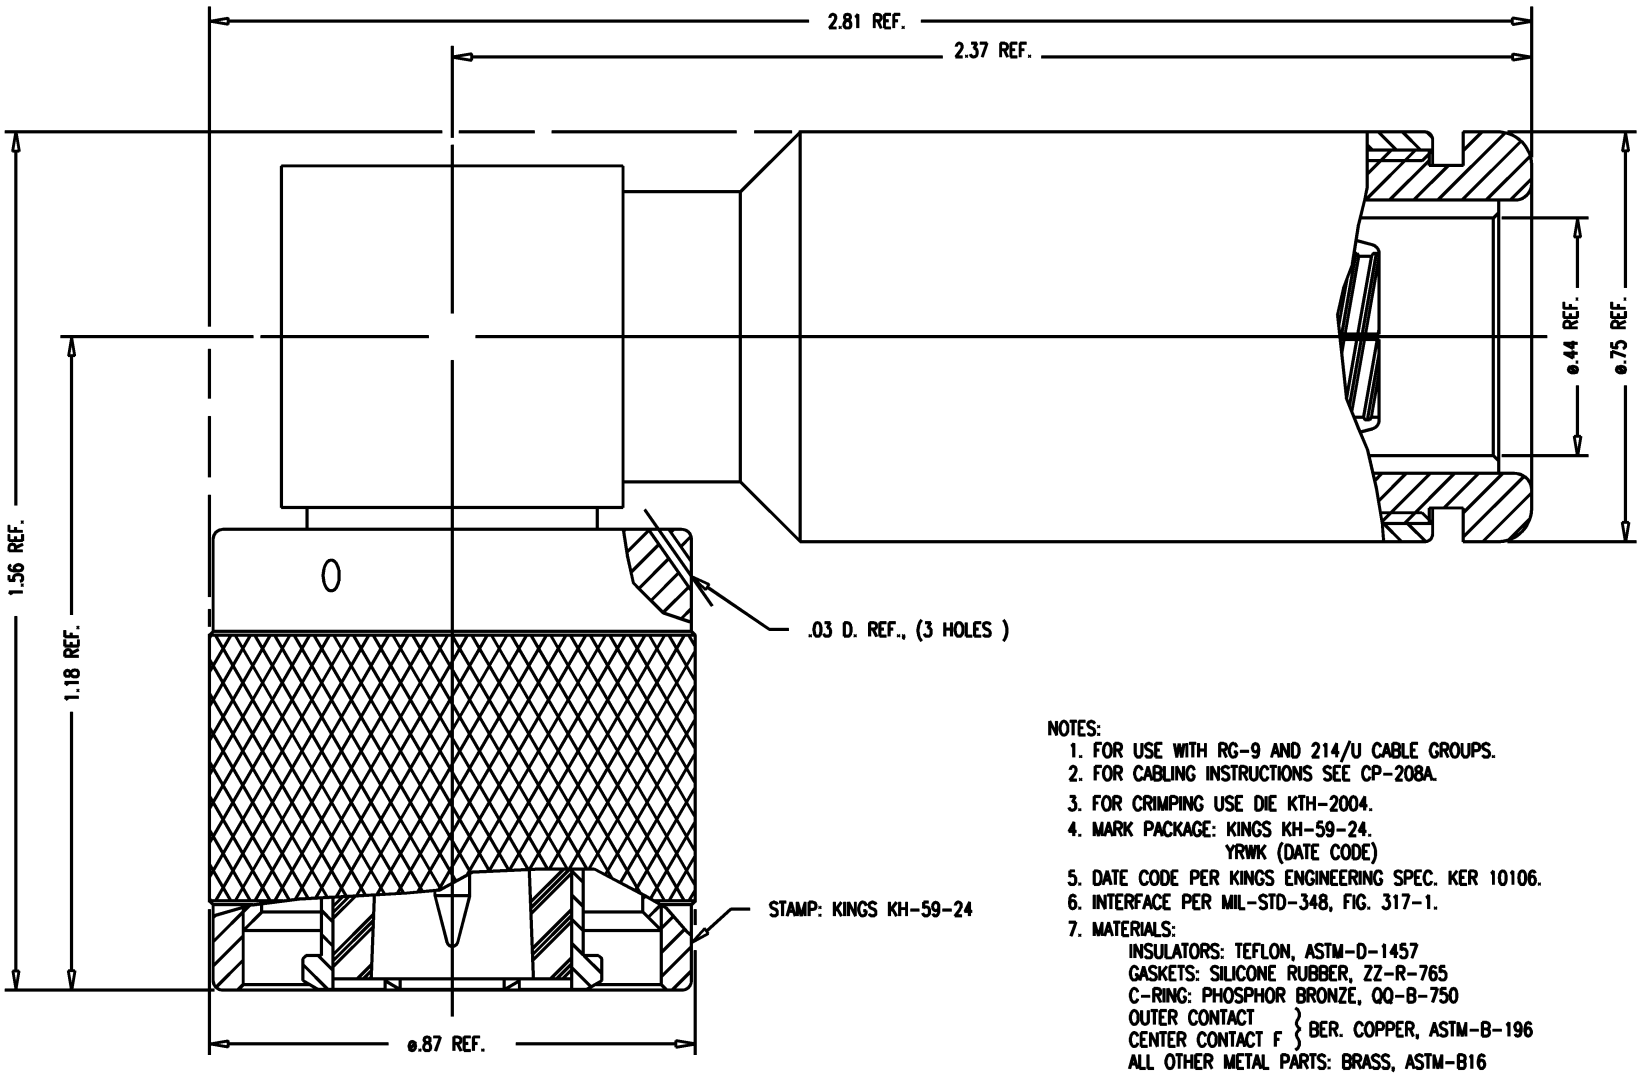

NOTES:
1. FOR USE WITH RG-9 AND 214/U CABLE GROUPS.
2. FOR CABLING INSTRUCTIONS SEE CP-208A.
3. FOR CRIMPING USE DIE KTH-2004.
4. MARK PACKAGE: KINGS KH-59-24.
   YRWK (DATE CODE)
5. DATE CODE PER KINGS ENGINEERING SPEC. KER 10106.
6. INTERFACE PER MIL-STD-348, FIG. 317-1.
7. MATERIALS:
   INSULATORS: TEFLON, ASTM-D-1457
   GASKETS: SILICONE RUBBER, ZZ-R-765
   C-RING: PHOSPHOR BRONZE, QQ-B-750
   OUTER CONTACT } BER. COPPER, ASTM-B-196
   CENTER CONTACT F } BER. COPPER, ASTM-B-196
   ALL OTHER METAL PARTS: BRASS, ASTM-B16
8. FINISHES:
   CENTER CONTACT ASSEMBLY: HARD GOLD PLATE PER MIL-G-45204
   ALL OTHER METAL PARTS: SILVER PLATE, PER QQ-S-365
9. ELECTRICAL CHARACTERISTICS:
   NOMINAL IMPEDANCE: 50 OHMS
   WORKING VOLTAGE: 1500 VRMS
   FREQUENCY RANGE: DC TO 4 GHz.

GSD

KH-59-24

REVISIONS

ISSUE	CHANGES
15	CN 37530 A REDRAWN JW 02/26/98
16	CN 38772 D JLA 02/18/03

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

PL, ANG, HN

DRAWN	PAS	DATE	06/12/80
DESIGN	LI	DATE	06/27/80
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

KH-59-24