

NOTES: UNLESS OTHERWISE SPECIFIED
 1. INTERFACE COMPLIANT TO SMPTE 304 SPECIFICATION


2. MATERIAL SPECIFICATIONS:
 CONTACTS: COPPER ALLOY
 CRIMP SLEEVE: PHOS. BRONZE
 O-RING: SILICONE RUBBER
 SHIELD GROUND: 303 STAINLESS STEEL PER ASTM A582.

3. FINISH SPECIFICATIONS:
 CONTACTS: .000100 MIN GOLD PER ASTM B488 OVER
 .000080 MIN NICKEL PER AMS-QQ-N-290
 CRIMP SLEEVE: .000100 MIN NICKEL PER AMS-QQ-N-290 OVER
 COPPER FLASH PER ASTM B734.

4. REPLACEMENT KIT FOR ASSEMBLIES: 7765-3-3 (NOT PRE-POLISHED) AND 7765-4-3 (PRE-POLISHED)

5. USE CABLE ASSEMBLY PROCEDURE: CAP-E05.

REV	DESCRIPTION	BY DATE	APPD
03	PRELIMINARY DRAWING ER22701	JCF 04/28/10	XX

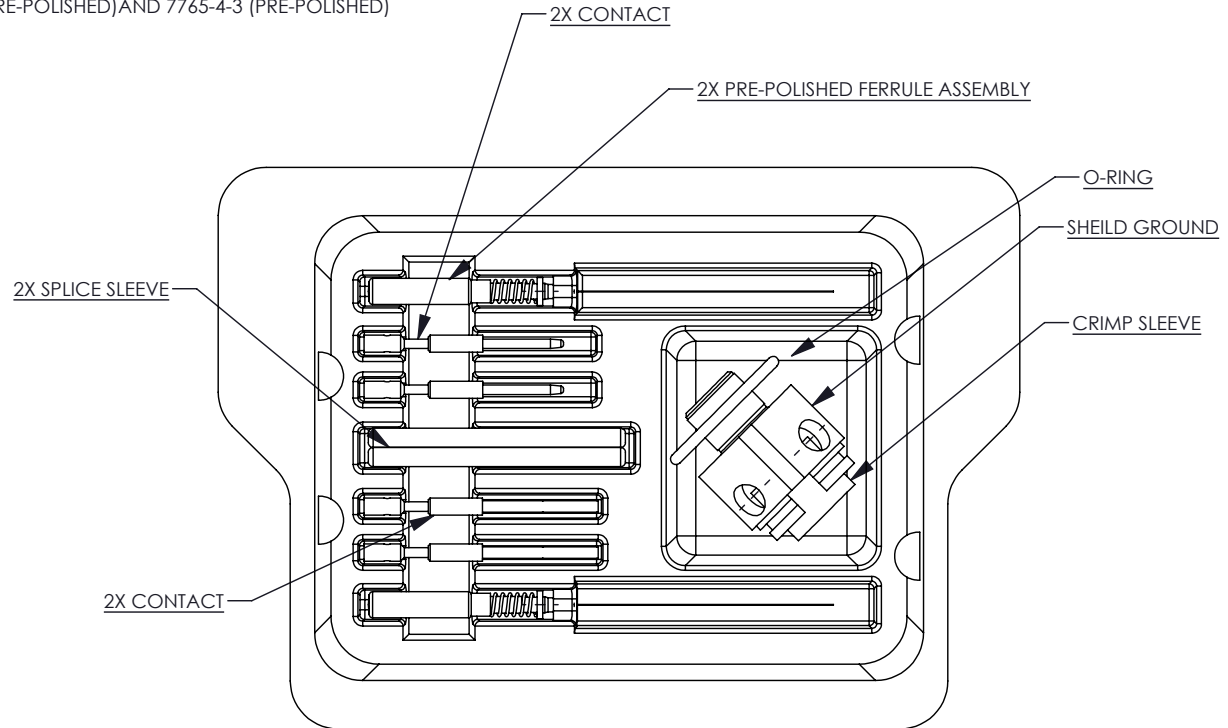

CATALOG P/N: 7760-000-00708Z

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .XXXX ANGLES: ± 2° SCALE: 1:1				 by WINCHESTER ELECTRONICS Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492	
CUSTOMER SALES DRAWING			THIRD ANGLE		
DRAWN	DATE	APPROVED	DATE		
PSM	04/21/10	JCF	04/23/10		
APPROVED	DATE	APPROVED	DATE		
IP	04/23/10	PP	04/23/10		
A SD7760-000-00708Z				SHT OF	REV
				1 1	03