


- NOTES:
1. FOR USE WITH RG-182, 225 & 400/U CABLE.
 2. FOR CABLE TRIMMING USE KTU-115 & KTD-106.
 3. FOR CRIMPING USE DIE SIZE 01.
 4. FOR CABLING INSTRUCTIONS SEE CP-065.

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 3 PLACE DECIMALS & 010
2. REMOVE ALL BURRS, BREAK SHARP EDGES .008 MAX.
3. PLACE DECIMALS & .004
4. NO FILLETS PERMITTED
5. SURFACE ROUGHNESS 3 MICRONS RMS MAX.
6. 1.1 R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT
7. ALL DIMENSIONS PRIOR TO PLATING.
8. EXCEED HALF THE SUM OF THEIR TOLERANCES

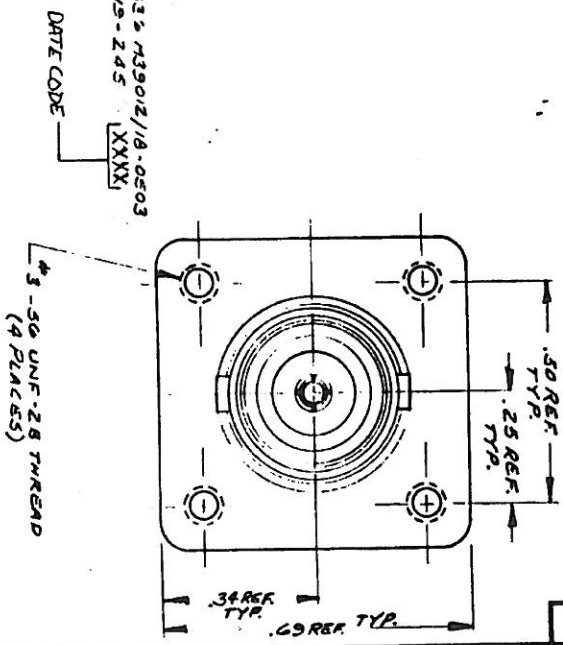

S-D
M39012/18-0503 (SHEET 1 OF 2)

REVISIONS	
ISSUE	CHANGES
2	CN 18477A 54 24 JUL 78
3	CN 18616 E 54 21 AUG 78
4	CN 231G9 E JEP 29 APR 82
7	CN 32279 A LNM 14 JUN 90
8	

S-D
M39012/18-0503
(SHEET 1 OF 2)

SCALE 4:1
KC-19-245

FINISH: PBR
SPEC: KER 10004
MATERIAL: BNC
PART: PANEL JACK
DATE: 28 JUL 78
DATE: 3/2/88
KINGS ELECTRONICS
40 HANDEDALE ROAD
TUCKAHOE, N.Y. 10783

