


E4/STM-1/STS-3/OC-3 Interface Transformer EPR1622SE

- Designed for TDK 78P2253 Transceiver
- Meets or exceeds IEC 950 Standards
- Operating Temperature -40°C to +85°C
- 1500 Vrms Isolation


Electrical Parameters @ 25° C

Primary Inductance (μ H Min.)	Return Loss (dB Min.)	Insertion Loss (dB Max.)	DCR (Ω Max.)
36	-15	-3	0.30
Pins 1-3/6-8	8 MHz	0.1 MHz-400 MHz	

Schematic

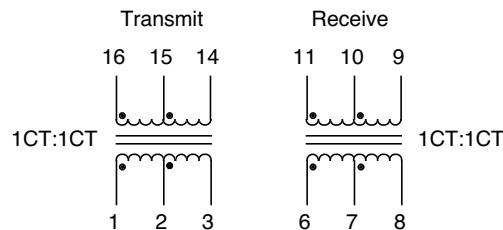

Package

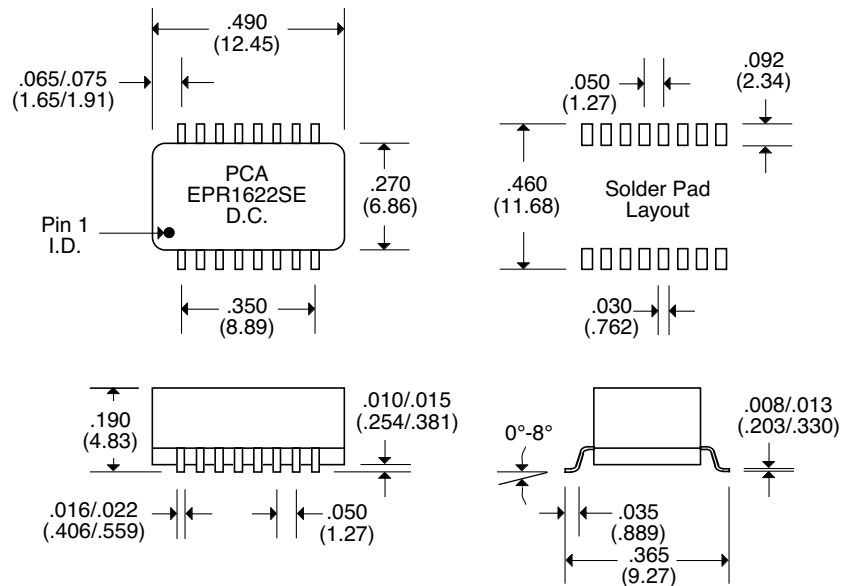

Unless Otherwise Specified Dimensions are in Inches /mm $\pm .010 / .25$