


SOM-DB5720

Development Board for COM Express Type 1/2 Pin-out Modules

NEW

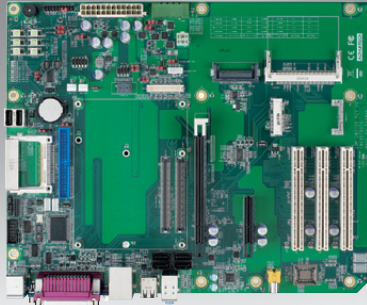

CE FCC

Features

- Support Type 1/2 pin-out for COM Express Basic/Compact/Mini modules
- Compliant with PICMG COM.0 R2.1 standard
- ATX form factor with both ATX & AT power support
- Display Type: VGA, LVDS, SDVO, HDMI, DisplayPort
- Expansion: PCIe x16, PCIe x4, PCIe x1, Mini-PCIe, Express Card, PCI, Mini-PCI, LPC, SMBus, I²C
- I/O: GbE, SATA, IDE, CF, USB2.0, COM, LPT, PS/2 KB/MS, SPI, TPM

Specifications

Compatible Models		Advantech COM Express Basic/Compact/Mini Module with Type 1/2 Pin-out
Switch Position	VGA	1 (D-SUB 15P Female)
	LVDS	18/24-bit single or dual channel
Display	SDVO	Up to 2 ports (expand by ADD2 Card through PCIe x16 slot)
	HDMI/DP	Up to 2 ports (expand by SOM-EA20 through PCIe x16 slot)
Expansion	PCIe x16	1
	PCIe x4	1
	PCIe x1	4 (expand by SOM-EA10 through PCIe x4 slot)
	Mini-PCIe	1
	Express Card	1
	PCI Slot	3
	Mini-PCI	1
	LPC	1
	SMBus	1
I ² C	1	
SPI	1	
I/O	Ethernet	1 Giga LAN
	SATA	4 (Type B)
	IDE	1
	CF	1
	USB2.0	8 ports (include 1 client port)
	Audio	Line-in, Line-out, MIC, SPDIF (Realtek ALC892)
	Serial	2 COM ports RS-232 (D-SUB 9P on I/O bracket), RS-232/422/485 (Box header 5x2P on board)
	KB/MS	1
	LPT	1 (D-SUB 25P)
	GPIO	8
	Fan	2
	Port 80	1
TPM	1	
Power	Power Type	ATX/AT modes
Environment	Operating Temperature	0 ~ 60° C (32 ~ 140° F)
	Operating Humidity	0% ~ 90% relative humidity, non-condensing
Mechanical	Dimensions	304.8 x 244 mm (12" x 9.6")

