

## Features

- Onboard Intel® Atom™ D525/N455/D425 Processor
- Intel® ICH8M
- SODIMM DDR3 667/800 Memory, Max. 4 GB
- 10/100Base-TX Ethernet
- CRT, 24-bit Single-channel LVDS LCD
- AC97 2.3 Codec 2CH Audio
- PATA SSD (Up to 16 GB, Optional) x 1, SATA 3.0Gb/s x 2 (On Module)
- USB2.0 x 4, COM x 2
- +5V Only Operation



## Specifications


System	
Form Factor	ETX
Processor	Onboard Intel® Atom™ D525/N455/D425 processor
System Memory	204-pin DDR3 SODIMM x1, Max. 4 GB (DDR3 667/ 2 GB for N455 and DDR3 800/ 4GB for D525 and D425)
Chipset	Intel® ICH8M
I/O Chipset	Winbond W83627DHG-P
Ethernet	Realtek RTL8102E-VB-GR, 10/100 Bast-TX
BIOS	AMI BIOS, SPI type, 4MB ROM
Wake on LAN	Optional
Watchdog Timer	Generates a time-out system reset
H/W Status Monitoring	Supports power supply voltages, fan speed and temperature monitoring
Expansion Interface	32-bit PCI x 4 8-bit/16-bit ISA SM Bus x 1
Battery	Lithium battery
Power Requirement	+5V DC
Power Consumption (Typical)	Intel® Atom™ D525 1.86GHz, DDR3 4GB, 3.42A@+5V
Board Size	4.5" (L) x 3.74" (W) (114mm x 95mm)
Gross Weight	0.66 lb (0.3kg)
Operating Temp.	32°F ~ 140°F (0°C ~ 60°C)
Storage Temp.	-40°F ~ 176°F (-40°C ~ 80°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
MTBF (Hours)	—
Display	
Supports CRT/LCD Dual Simultaneous/ Dual Independent Display	
Chipset	Intel® Atom™ D525/N455/D425 integrated Integrates hardware MPEG2 decoder
Memory	Shared system memory up to 384MB/ DVMT 4.0
Resolution	Up to 1400 x 1050 (SXGA) @ 60Hz for CRT Up to 1366 x 768 or 1280 x 800 (WXGA) for LCD
LCD Interface	24-bit signal-channel LVDS
I/O	
Storage	PATA SSD on board, Max. 16 GB (Optional) or PATA x 1 (two devices) SATA 3.0Gb/s x 2 (on module)
USB	USB2.0 x 4
Audio	Mic-in, Line-in, Line-out

## Packing List

- M2.5 Screw x 4
- Product CD
- ETX-LN

## Dimension

Unit: mm

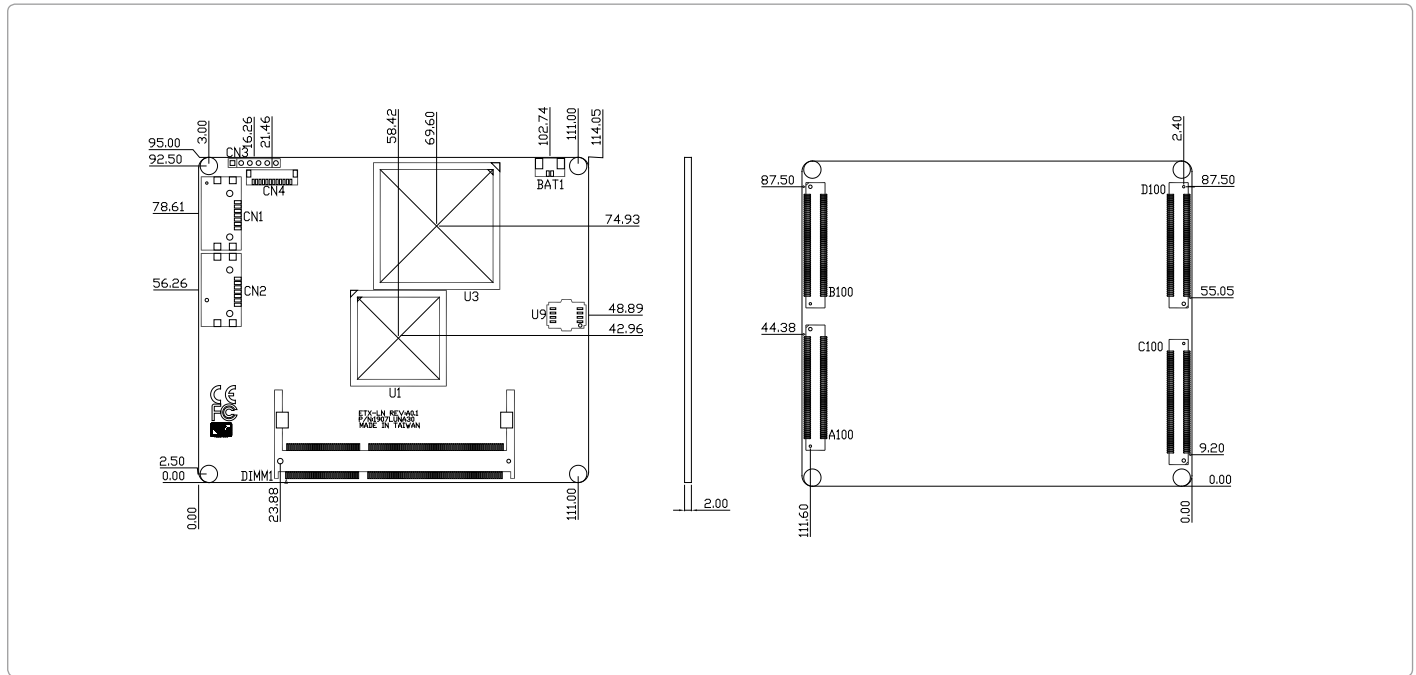

## Ordering Information

Part Number	CPU	Memory	Display	LVDS	Storage	LAN	USB2.0	KB/MS	URAT	LPT	Expansion Slot	Power	Temp.
TF-ETX-LN-A10	Intel® Atom™ N455/1.66G	DDR3 SODIMM x 1 Max.2GB	CRT, LVDS	24-bit Single Channel	SATA2 x 2 PATA x 1	FE x 1	4	1	2	1	8-bit/16-bit/ISA 32-bit PCI x 4	5V	0°C ~ 60°C
TF-ETX-LN-A10-01	Intel® Atom™ D525/1.8G	DDR3 SODIMM x 1 Max.4GB	CRT, LVDS	24-bit Single Channel	SATA2 x 2 PATA x 1	FE x 1	4	1	2	1	8-bit/16-bit/ISA 32-bit PCI x 4	5V	0°C ~ 60°C
TF-ETX-LN-A10-02	Intel® Atom™ D525/1.8G	DDR3 SODIMM x 1 Max.4GB	CRT, LVDS	24-bit Single Channel	16GB SSD SATA2 x 2 PATA x 1	FE x 1	4	1	2	1	8-bit/16-bit/ISA 32-bit PCI x 4	5V	0°C ~ 60°C
TF-ETX-LNW1-A10	Intel® Atom™ N455/1.66G	DDR3 SODIMM x 1 Max.2GB	CRT, LVDS	24-bit Single Channel	SATA2 x 2 PATA x 1	FE x 1	4	1	2	1	8-bit/16-bit/ISA 32-bit PCI x 4	5V	WITAS 1 (-20°C ~ 70°C)

## Optional Accessories

- TF-ECB-902M-A10**  
 ETX Carrier Board, LAN, Audio, 2COM, USB2.0, PCI, ISA, AT/ATX, Rev.A1.0 (For ETX-LN, ETX-945GSE, ETX-701, ETX-700)
- TF-PER-A101**  
 CPU Cooler, For ETX-LN, Onboard CPU
- TF-PER-A102**  
 Passive Heatsink, For ETX-LN, Onboard CPU
- TF-PER-A103**  
 Heat Spreader Kit, For ETX-LN, Onboard CPU