

For Scintillation Counting, Fast Time Response  
51 mm (2 Inch) Diameter, Bialkali Photocathode, 8-stage, Head-on Type

## SPECIFICATIONS

### GENERAL

Parameter		Description / Value	Unit
Spectral Response		300 to 650	nm
Wavelength of Maximum Response		420	nm
Window Material		Borosilicate glass	—
Photocathode	Material	Bialkali	—
	Minimum Effective Area	φ46	mm
Dynode	Structure	Linear focused	—
	Number of Stages	8	—
Base		Flying lead type	—
Operating Ambient Temperature		-30 to +50	°C
Storage Temperature		-80 to +50	°C

### MAXIMUM RATINGS (Absolute Maximum Values)

Parameter		Value	Unit
Supply Voltage	Between Anode and Cathode	1750	V
Average Anode Current		0.1	mA

### CHARACTERISTICS (at 25 °C)

Parameter		Min.	Typ.	Max.	Unit
Cathode Sensitivity	Luminous (2856 K)	—	95	—	μA/lm
	Blue Sensitivity Index (CS 5-58)	—	11	—	—
Anode Sensitivity	Luminous (2856 K)	—	47.5	—	A/lm
Gain		—	$5.0 \times 10^5$	—	—
Anode Dark Current (After 30 minute storage in darkness)		—	15	100	nA
Time Response	Anode Pulse Rise Time	—	1.8	—	ns
	Electron Transit Time	—	20	—	ns
	Transit Time Spread (FWHM)	—	250	—	ps
Pulse Linearity (±2 % deviation)		—	50	—	mA

**NOTE:** Anode characteristics are measured with a voltage distribution ratio and supply voltage shown below.

### VOLTAGE DISTRIBUTION RATIO AND SUPPLY VOLTAGE

Electrodes	K	G	Dy1	Dy2	Dy3	Dy4	Dy5	Dy6	Dy7 (Acc)	Dy8	P
Ratio	1.3	4.8	1.5	1.5	1	1	1	1	1	1	1

Supply Voltage: 1500 V, K: Cathode, Dy: Dynode, P: Anode, G: Grid,

Acc to be connected to Dy7 with a protection resistor (RP) in series. (See Figure 4)

# PHOTOMULTIPLIER TUBE R9779

Figure 1: Typical Spectral Response

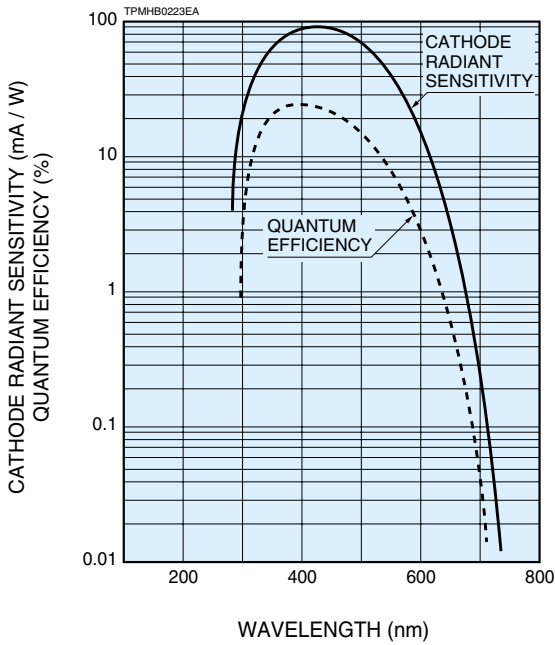


Figure 2: Typical Gain

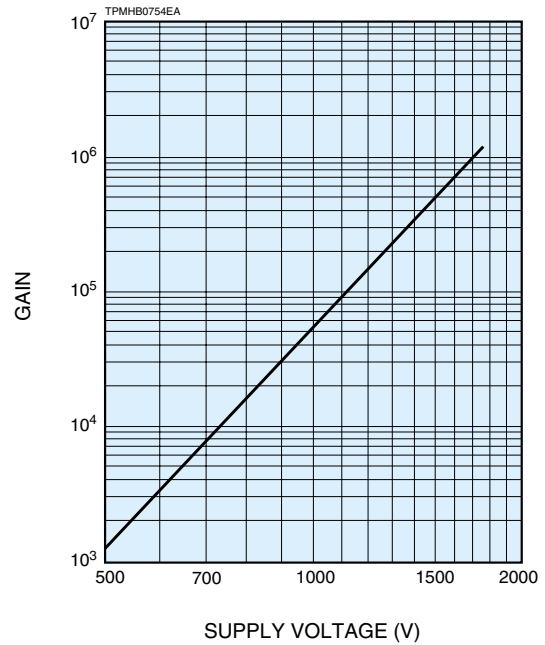


Figure 3: Dimensional Outline and Basing Diagram (Unit: mm)


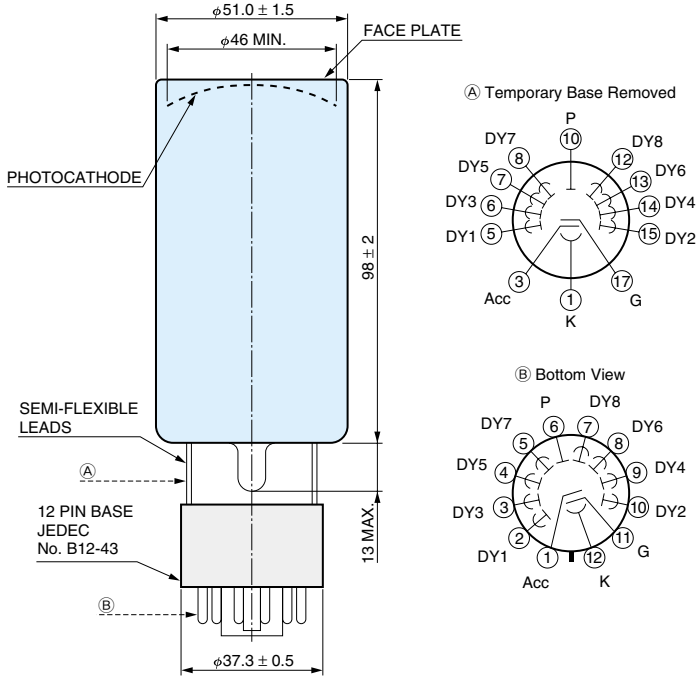


Figure 4: Recommended Voltage Divider Circuit

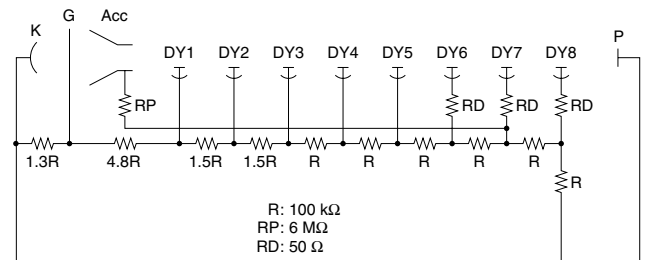

## NOTES

The material in the R9779 contains beryllium. Please follow the applicable regulations regarding disposal of hazardous materials and industrial wastes in your country, state, region or province.

# HAMAMATSU

WEB SITE [www.hamamatsu.com](http://www.hamamatsu.com)

HAMAMATSU PHOTONICS K.K., Electron Tube Division

314-5, Shimokanzo, Iwata City, Shizuoka Pref., 438-0193, Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P. O. Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218 E-mail: [usa@hamamatsu.com](mailto:usa@hamamatsu.com)

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658 E-mail: [info@hamamatsu.de](mailto:info@hamamatsu.de)

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10 E-mail: [infos@hamamatsu.fr](mailto:infos@hamamatsu.fr)

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road Welwyn Garden City Hertfordshire AL7 1BW, United Kingdom, Telephone: 44-(0)1707-294888, Fax: 44(0)1707-325777 E-mail: [info@hamamatsu.co.uk](mailto:info@hamamatsu.co.uk)

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171-41 SOLNA, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01 E-mail: [info@hamamatsu.se](mailto:info@hamamatsu.se)

Italy: Hamamatsu Photonics Italia: S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39)02-935 81 733, Fax: (39)02-935 81 741 E-mail: [info@hamamatsu.it](mailto:info@hamamatsu.it)

TPMHA0520EA

TPMH1297E01  
APR. 2006 IP