

## FEATURES

- ◆ RoHS compliant
- ◆ Efficiency up to 83%
- ◆ SIP/DIP Package
- ◆ Wide temperature performance at full 1 Watt load, -40°C to 85°C
- ◆ UL 94V-0 package material
- ◆ No heatsink required
- ◆ Small Footprint
- ◆ Industry standard pinout
- ◆ Power sharing on output
- ◆ 1KVDC isolation
- ◆ Continuous Short Circuit Protection
- ◆ Internal SMD construction
- ◆ No external components required
- ◆ MTTF up to 1.8 million hours

## MODEL SELECTION

### IB<sup>①</sup> 05<sup>②</sup> 05<sup>③</sup> X<sup>④</sup> LS<sup>⑤</sup> -1W<sup>⑥</sup>

- ① Product Series
- ② Input Voltage
- ③ Output Voltage
- ④ Fixed Input
- ⑤ SIP Package
- ⑥ Rated Power

## APPLICATIONS

The IB\_XLS-1W & IB\_XLD-1W series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) where the voltage of the input power supply is fixed (voltage variation  $\pm 5\%$ );
- 2) where isolation is necessary between input and output (isolation voltage  $\leq 1000\text{VDC}$ );
- 3) where the regulation of the output voltage and the output ripple noise are demanded.

## SELECTION GUIDE

Order code	Input		Output			Efficiency (% Typ)	Switching Frequency (KHz Typ)
	Voltage (VDC)		Voltage (VDC)	Current (mA)			
	Nominal	Range		Max	Min		
IB0505XLD-1W	5	4.75-5.25	5	150	15	68	80
IB0509XLD-1W	5	4.75-5.25	9	111	12	70	75
IB0512XLD-1W	5	4.75-5.25	12	83	9	71	83
IB0515XLD-1W	5	4.75-5.25	15	67	7	73	67
IB0505XLS-1W	5	4.75-5.25	5	150	15	68	70
IB0509XLS-1W	5	4.75-5.25	9	111	12	70	75
IB0512XLS-1W	5	4.75-5.25	12	83	9	71	69
IB0515XLS-1W	5	4.75-5.25	15	67	7	73	80
IB1205XLD-1W	12	11.4-12.6	5	150	15	68	85
IB1209XLD-1W	12	11.4-12.6	9	111	12	72	74
IB1212XLD-1W	12	11.4-12.6	12	83	9	70	71
IB1215XLD-1W	12	11.4-12.6	15	67	7	74	65
IB1205XLS-1W	12	11.4-12.6	5	150	15	68	68
IB1209XLS-1W	12	11.4-12.6	9	111	12	72	67
IB1212XLS-1W	12	11.4-12.6	12	83	9	70	65
IB1215XLS-1W	12	11.4-12.6	15	67	7	74	66
IB1505XLS-1W	15	14.25-15.75	5	150	15	70	69
IB1509XLS-1W	15	14.25-15.75	9	111	12	71	75
IB1512XLS-1W	15	14.25-15.75	12	83	9	71	74
IB1515XLS-1W	15	14.25-15.75	15	67	7	72	72
IB2405XLD-1W	24	22.8-25.2	5	150	15	68	73
IB2409XLD-1W	24	22.8-25.2	9	111	12	68	71
IB2412XLD-1W	24	22.8-25.2	12	83	9	73	70
IB2415XLD-1W	24	22.8-25.2	15	67	7	75	70
IB2405XLS-1W	24	22.8-25.2	5	150	15	68	80
IB2409XLS-1W	24	22.8-25.2	9	111	12	68	74
IB2412XLS-1W	24	22.8-25.2	12	83	9	73	60
IB2415XLS-1W	24	22.8-25.2	15	67	7	75	62

## OUTPUT SPECIFICATIONS

Parameter	Test conditions	Min	Typ.	Max.	Units
Output power		0.1		1	W
Line regulation	For Vin change of $\pm 5\%$			$\pm 0.25$	%
Load regulation	10% to 100% full load			$\pm 1$	%
Output voltage accuracy	100% full load			$\pm 3$	%
Temperature drift	100% full load			0.03	%/°C
Output Ripple*	20MHz Bandwidth		10	20	MV p-p
Output Noise*	20MHz Bandwidth		50	75	MV p-p
Switching frequency	Full load, nominal input		100		Khz

\* Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.



MICRODC reserves the copyright


### TEMPERATURE CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Storage humidity range				95	%
Operating temperature		-40		80	°C
Storage temperature		-55		125	°C
Lead temperature	1.5mm from case for 10 seconds		15	25	°C
Temp.rise at full load				300	°C
Cooling	Free air convection				
Case material	Plastic(UL94-V0)				
Short circuit protection	Continuous				
MTBF		3500		1	K hours
Weight			2.1		g

\*Supply voltage must be discontinued at the end of short circuit duration.


### TYPICAL CHARACTERISTICS

Temperature Derating Graph

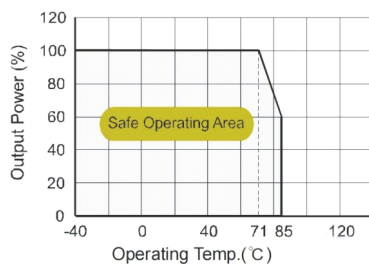

### OUTLINE DIMENSIONS & PIN CONNECTIONS

IB-XLS-1W




FOOTPRINT DETAILS	
Pin	SIP
1	VIN
2	GND
4	0V
6	+V0

Note:  
Unit:mm(inch)  
Pin section:0.50\*0.3mm(0.020\*0.12inch)  
Pin section tolerances: ±0.10mm(±0.004inch)  
General tolerances: ±0.25mm(±0.010inch)

SIZE Graph

RECOMMENDED FOOTPRINT  
Top view:grid:2.54mm(0.1inch)  
diameter:1.00mm(0.039inch)

IB-XLD-1W



FOOTPRINT DETAILS	
Pin	SIP
1	GND
7	NC
9	+V0
11	0V
14	VIN

NC:No Connection

All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified. Another 24V products, please inquire Our technical department!

#### Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load is not less than 10% of the full load, and that this product should never be operated under no load! If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power .


### APPLICATION NOTE

#### Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load is not less than 10% of the full load, and that this product should never be operated under no load! If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power (IB\_XLD -W25/IB\_XLS-W25 series).

#### Recommended circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

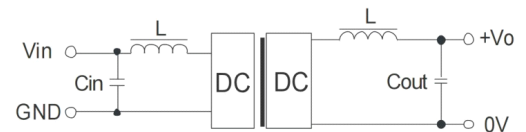

(Figure 1)

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1).

EXTERNAL CAPACITOR TABLE (TABLE 1)

Vin (VDC)	Cin (μF)	Vout (VDC)	Cout (μF)
5	4.7	5	10
12	2.2	9	4.7
15	1	12	2.2
24	0.47	15	1

It's not recommend to connect any external capacitor in the application field with less than 0.5 watt output.

#### Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against over-current and short-circuits. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

**When the environment temperature is higher than 71° C, the product output power should be less than 60% of the rated power.**

No parallel connection or plug and play.

Use dual output simultaneously, forbid opening output pin(0V) to use as single output.

#### RoHS COMPLIANT INFORMATION

This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300° C for 10 seconds. The pin termination finish on the SIP package type is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The DIP types are Matte Tin over Nickel Preplate. Both types in this series are backward compatible with Sn/Pb soldering systems.

#### REACH COMPLIANT INFORMATION

This series has proven that this product does not contain harmful chemicals, it also has harmful chemical substances through the registration, inspection and approval.