


Si PIN photodiode array

S8558

Surface mountable 16-element photodiode array

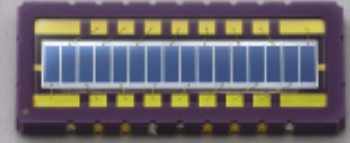

S8558 is a 16-element Si PIN photodiode array in a ceramic chip carrier package suitable for surface mount using solder reflow techniques. S8558 can be used in a wide range of applications including spectrophotometer and position detection.

Features

- Active area: 0.7 × 2.0 mm (× 16 elements)
- Ceramic chip carrier package for surface mount
- Suitable for solder reflow
- High sensitivity

Applications

- Spectrophotometers
- Position detection


■ Absolute maximum ratings (Ta=25 °C)

Parameter	Symbol	Value	Unit
Reverse voltage	VR Max.	30	V
Operating temperature	Topr	-40 to +100	°C
Storage temperature	Tstg	-40 to +125	°C

■ Electrical and optical characteristics (Ta=25 °C, per 1 element)


Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Spectral response range	λ		-	320 to 1100	-	nm
Peak sensitivity wavelength	λ_p		-	960	-	nm
Photo sensitivity	S	$\lambda=660$ nm	-	0.45	-	A/W
		$\lambda=780$ nm	-	0.57	-	A/W
		$\lambda=830$ nm	-	0.62	-	A/W
		$\lambda=\lambda_p$	-	0.72	-	A/W
Short circuit current	Isc	100 lx	-	1.0	-	μ A
Dark current	ID	VR=10 V	-	0.05	1.0	nA
Temperature coefficient of ID	TCID		-	1.15	-	times/°C
Cut-off frequency	fc	VR=10 V, RL=50 Ω $\lambda=830$ nm, -3 dB	-	25	-	MHz
Terminal capacitance	Ct	VR=10 V, f=1 MHz	-	5	10	pF
Noise equivalent power	NEP	VR=10 V, $\lambda=\lambda_p$	-	5.6×10^{-15}	-	W/Hz ^{1/2}

■ Spectral response

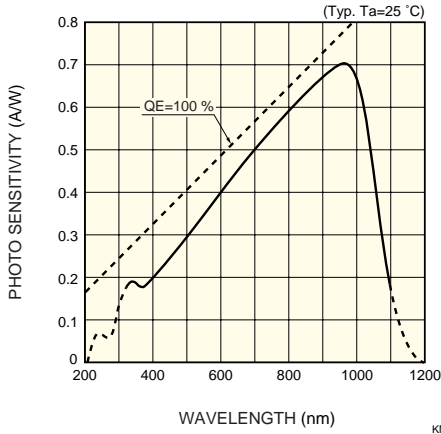


KMPDB0193EA

■ Dark current vs. reverse voltage

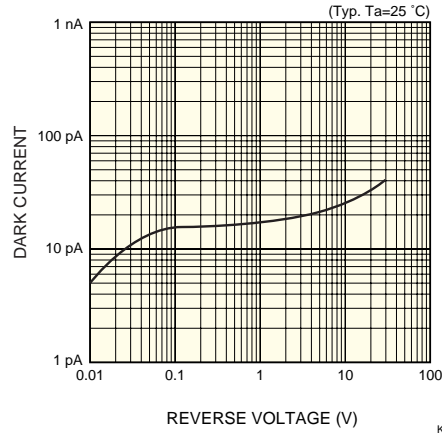


KMPDB0194EA

■ Terminal capacitance vs. reverse voltage

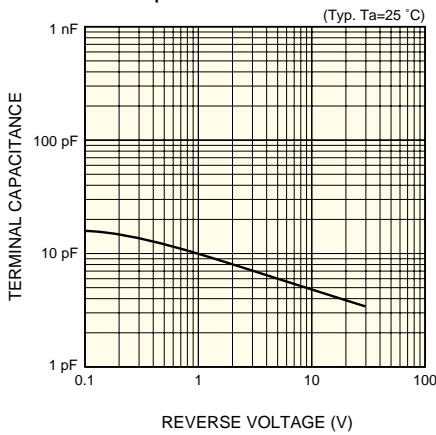




KMPDB0195EA

■ Cut-off frequency vs. reverse voltage

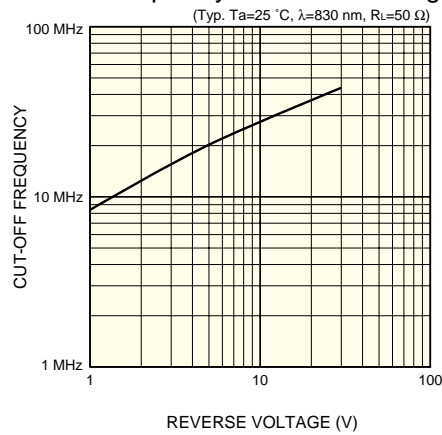

KMPDB0196EA

■ Dimensional outline (unit: mm)

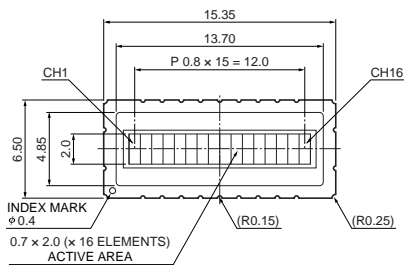

- ① 1 ⑩ 16
- ② 3 ⑪ 14
- ③ 5 ⑫ 12
- ④ 7 ⑬ 10
- ⑤ 9 ⑭ 8
- ⑥ 11 ⑮ 6
- ⑦ 13 ⑯ 4
- ⑧ 15 ⑰ 2
- ⑨ KC ⑱ NC

Tolerance unless otherwise noted: ±0.25
Chip position accuracy with respect to the package center
X, Y ≤ ±0.3

KMPDA0144EA

HAMAMATSU Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2006 Hamamatsu Photonics K.K.

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81) 53-434-3311, Fax: (81) 53-434-5184, www.hamamatsu.com

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trépu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Smidsvågen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741